



# Semiconductor Product Catalog

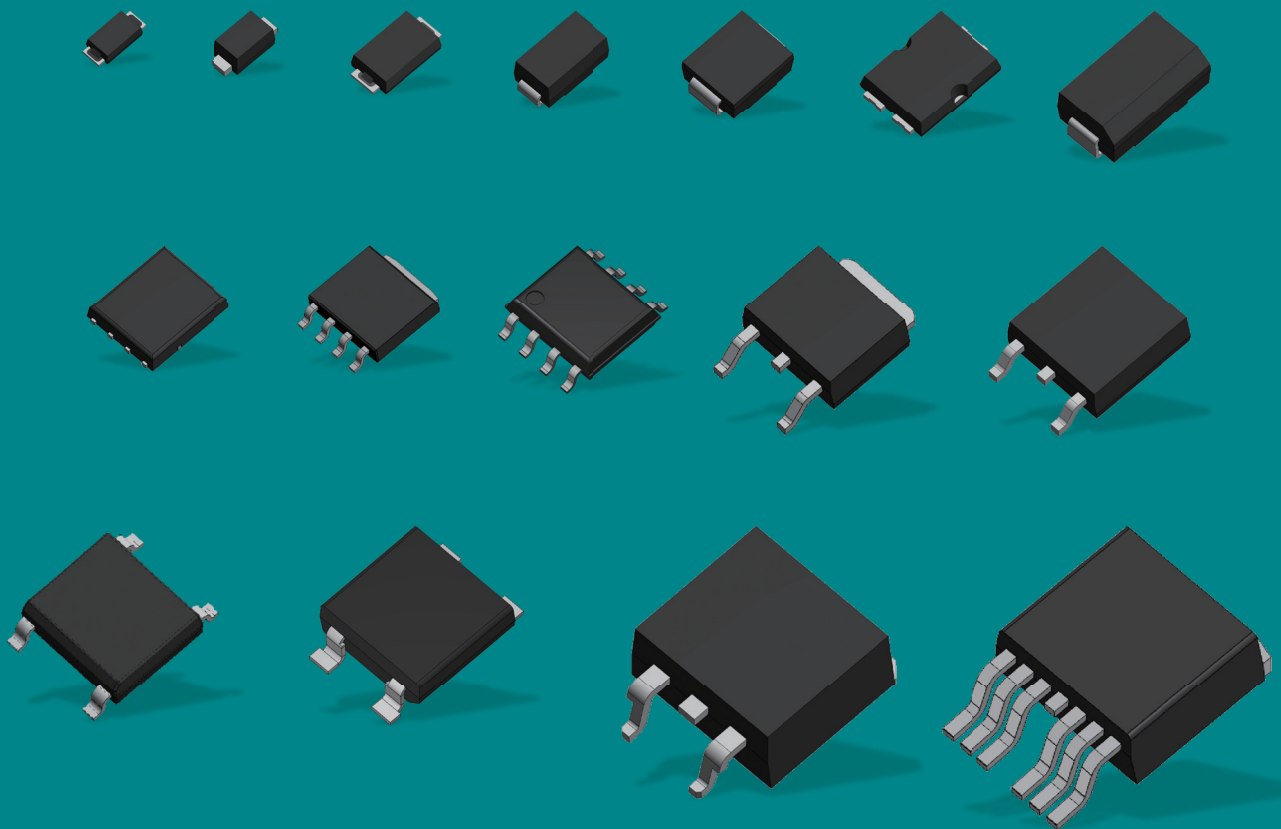

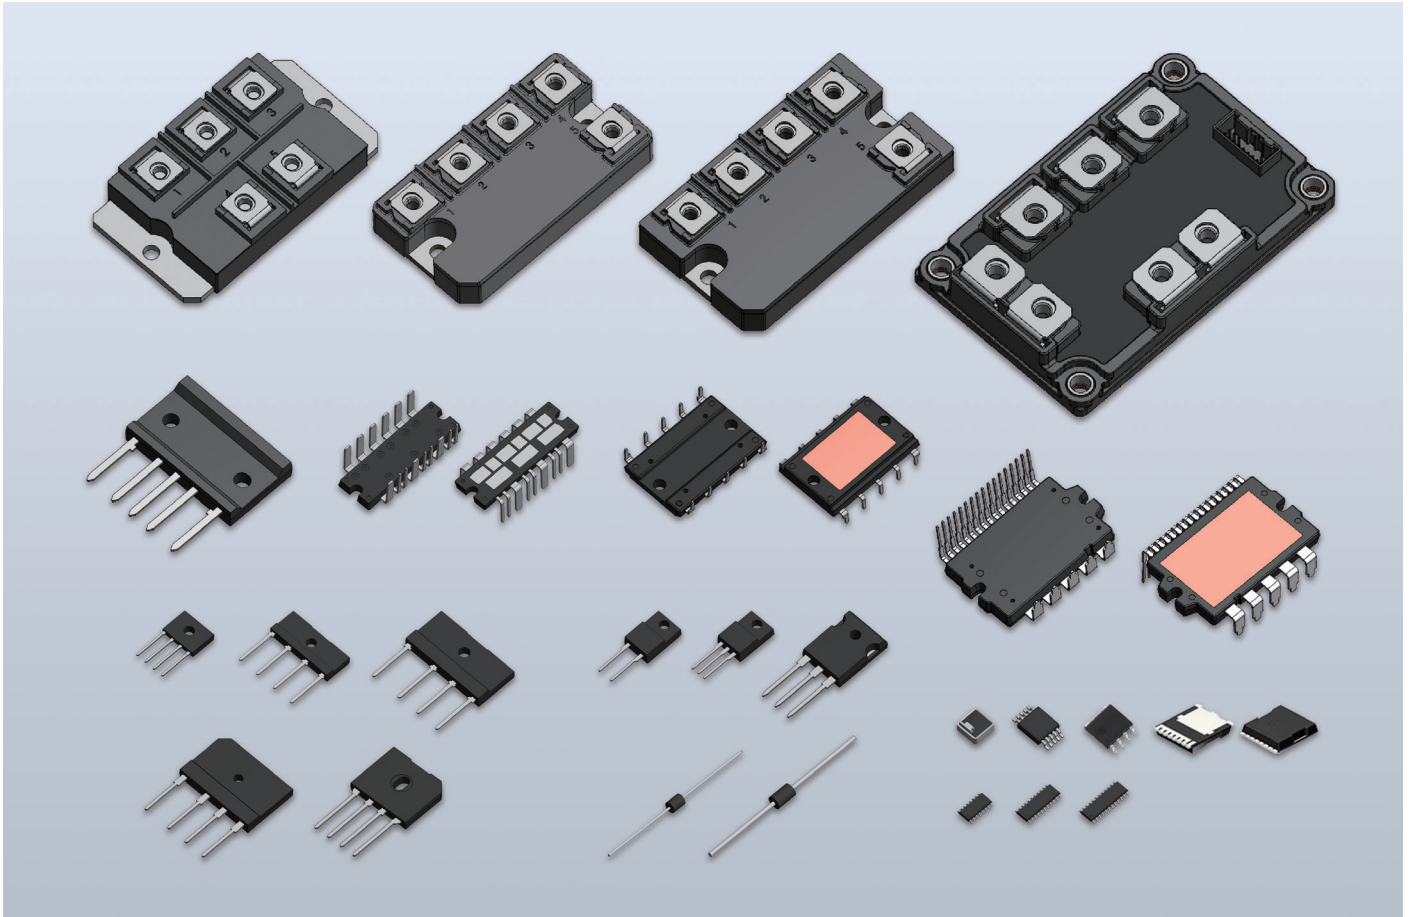

## Notes

- ⚠ If you wish to use any such product, please be sure to refer to the specifications issued by Shindengen.
- ⚠ All products described or contained herein are designed with a quality level intended for use in standard applications requiring an ordinary level of reliability. If these products are to be used in equipment or devices for special or specific applications requiring an extremely high grade of quality or reliability in which failures or malfunctions of products may directly affect human life or health, a local Shindengen office must be contacted in advance to confirm that the intended use of the product is appropriate. Shindengen products are grouped into the following three applications according to the quality grade.
  - Standard applications  
Computers, office automation and other office equipment, communication terminals, test and measurement equipment, audio/visual equipment, amusement equipment, consumer electronics, machine tools, personal electronic equipment, industrial equipment, etc.
  - Special applications  
Transportation equipment (vehicles, ships, etc.), trunk-line communication equipment, traffic signal control systems, anti-disaster/crime systems, safety equipment, medical equipment, etc.
  - Specific applications  
Nuclear reactor control systems, aircraft, aerospace equipment, submarine repeaters, life support equipment and systems, etc.
- ⚠ Although Shindengen continuously endeavors to enhance the quality and reliability of its products, customers are advised to consider and take safety measures in their design, such as redundancy, fire containment and anti-failure, so that personal injury, fires, or societal damages can be prevented.
- ⚠ Please note that all information described or contained herein is subject to change without notice due to product upgrades and other reasons. When buying Shindengen products, please contact the Company's offices or distributors to obtain the latest information.
- ⚠ Shindengen shall not bear any responsibility with regards to damages or infringement of any third-party patent rights and other intellectual property rights incurred due to the use of information on this website.
- ⚠ The information and materials on this website neither warrant the use of Shindengen's or any third party's patent rights and other intellectual property rights, nor grant license to such rights.
- ⚠ In the event that any product described or contained herein falls under the category of strategic products controlled under the Foreign Exchange and Foreign Trade Control Law of Japan, exporting of such products shall require an export license from the Japanese government in accordance with the above law.
- ⚠ No reprinting or reproduction of the materials on this website, either in whole or in part, is permitted without proper authorization from Shindengen.

P3-8	INDEX
P9-12	GENERAL RECTIFYING DIODES
P13-22	BRIDGE DIODES
P23-32	SCHOTTKY BARRIER DIODES
P33-38	FAST RECOVERY DIODES
P39-40	THYRISTORS
P41-42	SIDACs
P43-44	TRIACs
P45-46	SURGE ABSORBERS
P47-50	TVS (Transient Surge Suppressor)
P51-58	POWER MOSFETs
P59-60	POWER MODULES
P61-64	POWER ICs
P65-86	PACKAGE LIST • OUTLINE DIMENSIONS
P87-88	PACKING SPECIFICATION
P89-90	NOTES • How to Order • Outline of Packing Form • About AEC-Q101 & Automotive Grade SALES OFFICES

# INDEX

Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page
D1F60	10	D2L20U	36	D5FEC3SH	28	D10XB60	16	D30VC60	12	DE10SC3L	28	DL04-36F1	48	KL3Z07	46
D1F60A	10	D2L40U	36	D5FY4R5ST	26	D10XB60H	16	D30XB80	16	DE10SC4	28	DL20B-27F2	48	KL3Z18	46
D1FE60	10	D2S4M	26	D5FY4R5SY	26	D10XB80	16	D30XBN20	22	DF5VD60	12	DL20B-30F2	48	KP20NU11	46
D1FH3	24	D2S6M	26	D5FY6ST	26	D15FR4ST	26	D30XT80	20	DF8L60US	34	DL20B-33F2	48	KP40NU11	46
D1FJ4	24	D2SB60	16	D5FY6SY	26	D15FR60LA	34	D35XB80	16	DF10L60	34	DL20B-36F2	48	KP40RU22	46
D1FJ8	24	D2SB60A	16	D5FY10ST	26	D15FR60V	10	D35XBA80	16	DF10LC20U	38	G1VL8C	42	KU4F8	46
D1FJ8A	24	D2SBA60	16	D5FY10SY	26	D15FY4R5ST	26	D40FDC10ST	28	DF10LC30	38	G1VL10C	42	KU4F12	46
D1FJ10	24	D3CE4R5ST	24	D5FY15ST	26	D15FY4R5SY	26	D40FDC15ST	28	DF10NC15	28	G1VL15C	42	KU5S31NS	46
D1FK60	34	D3CE4S	24	D5FY20SN	26	D15FY6ST	26	D40XB80	16	DF10SC4M	28	G1VL20C	42	KU10L08	46
D1FK70	34	D3CE6S	24	D5FY60K	34	D15FY6SY	26	D40XB100	16	DF10SC6	28	G1VL22C	42	KU10N14	46
D1FK100	34	D3CE6ST	24	D5SB60	16	D15FY10ST	26	D40XBA80	16	DF10SC9	28	G1VL24C	42	KU10NU11	46
D1FK120	34	D3CE10ST	24	D5SB80	16	D15FY10SY	26	D45JCT120V	20	DF15JC10	28	K1VZL09	42	KU10NU13	46
D1FK120P	34	D3CE12ST	24	D5SBA60	16	D15FY15ST	26	D45JCT160V	20	DF15NC15	28	K1VZL20	42	KU10R23NS	46
D1FL20U	34	D3CE15ST	24	D6FBC4R5ST	28	D15JAB60V	16	D45XB80	16	DF15SC4M	28	KC3FB40H	40	KU10R27NS	46
D1FL40U	34	D3CE20LUS	34	D6FBC6ST	28	D15JAB80V	16	D45XT80	20	DF15VD60	12	KC5FB40H	40	KU10R29NS	46
D1FM3	24	D3CE60K	34	D6FBC10ST	28	D15XB60	16	D45XT160	20	DF16VC60R	12	KC5FB60H	40	KU10S31NS	46
D1FS4	24	D3CE60V	10	D6FBC12ST	28	D15XB60H	16	D50JCB80V	16	DF20JC10	28	KC5FB60HR	40	KU10S35NS	46
D1FS4A	24	D3CE60VE	10	D6FBC15ST	28	D15XB80	16	D50XB80	16	DF20L60	34	KC5FB60HRT	40	KU15N14	46
D1FS6	24	D3F60	10	D6FEC4ST	28	D15XB80H	16	D50XBA100	16	DF20L60U	34	KC5FB60HV	40	LK25XB60	22
D1FS6A	24	D3FE60	10	D6FEC10ST	28	D15XB100	16	D70JHB80V	18	DF20LC20US	38	KC5SF60HRT	40	LL15XB60	22
D1FT4	24	D3FJ10	24	D6FEC12ST	28	D15XBN20	22	D75JFT80V	20	DF20LC30	38	KC8SF80	40	LL25XB60	22
D1FT4A	24	D3FK60	34	D6FEC15ST	28	D15XBS6	22	D100JHT80V	20	DF20NC15	28	KD3FB60	44	LM25KBV60FR	22
D1FT6	24	D3FK120	34	D6JBB60V	16	D20FD60LU	34	D100JHT120V	20	DF20SC4M	28	KD3SF60	44	LM30KBV60FR	22
D1FT6A	24	D3FS4A	24	D6JBB80V	16	D20FDC10ST	28	D100JHT160V	20	DF20SC9M	28	KD3SF60E	44	LN1F60	10
D1FT10	24	D3FS6	24	D6SB60L	16	D20FDC15ST	28	D120SC4M	32	DF25SC6M	28	KD5SF60	44	LN4SB60	22
D1FT10A	24	D3S4M	26	D6SB80	16	D20FDC20L	38	D120SC6M	32	DF25V60	10	KD5SF60S	44	LN6SB60	22
D1FT15A	24	D3S6M	26	D6SBN20	22	D20FDC20LUS	38	D180SC4M	32	DF30JC4	28	KD5SF80	44	LN15XB60	22
D1N60	10	D3SB60	16	D8FD60LUS	34	D20FR4ST	26	D180SC6M	32	DF30JC6	28	KD8SF60	44	LN15XB60H	22
D1N80	10	D3SB80	16	D8JBB60V	16	D20FR4R5S	26	D240SC4M	32	DF30JC10	28	KD8SF60S	44	LN25XB60	22
D1NF60	36	D3SBA60	16	D8JBB80V	16	D20XB60	16	D240SC6M	32	DF30NC15	28	KD8SF80	44	M1F60	10
D1NK60	36	D3UBA80	14	D10FDC10ST	28	D20XB80	16	D360SC4M	32	DF30SC3ML	28	KD12SF60	44	M1F80	10
D1NK100	36	D4F60	10	D10FR60K	34	D20XBS6	22	D360SC6M	32	DF30SC4M	28	KD12SF60S	44	M1FE40	10
D1NL20U	36	D4SB60L	16	D10FR60LA	34	D25FD60V	10	DE3L20UA	34	DF40SC3L	28	KD12SF80	44	M1FE60	10
D1NL40U	36	D4SB80	16	D10FR60V	10	D25JAB60V	16	DE3S4M	26	DF40SC4	28	KD16SF60	44	M1FH3	24
D1NS4	26	D4SBL20U	22	D10FY4R5ST	26	D25JAB80V	16	DE3S6M	26	DG1H3	24	KD16SF60A	44	M1FJ4	24
D1NS6	26	D4SBN20	22	D10FY4R5SY	26	D25XB60	16	DE5L60A	34	DG1H3A	24	KD16SF60S	44	M1FK60	34
D1UBA80	14	D4SBS4	22	D10FY6ST	26	D25XB80	16	DE5L60U	34	DG1J10A	24	KD16SF80	44	M1FL20U	34
D2CE80K	34	D4SBS6	22	D10FY6SY	26	D25XB100	16	DE5LC20U	38	DG1M3	24	KD20SF60	44	M1FL40U	34
D2CF60K	34	D5CE4R5ST	24	D10FY10ST	26	D25XBA80	16	DE5S4M	26	DG1M3A	24	KD20SF60A	44	M1FM3	24
D2F60	10	D5CE4S	24	D10FY10SY	26	D30FD60K	34	DE5S6M	26	DG1N15A	24	KD20SF60S	44	M1FS4	24
D2FK60	34	D5CE6ST	24	D10FY15ST	26	D30FDC4S	28	DE5SC3ML	28	DG1S4	24	KD20SF80	44	M1FS6	24
D2FL20U	34	D5CE10ST	24	D10FY60VE	10	D30FDC10ST	28	DE5SC4M	28	DG1S6	24	KD25SF60A	44	M2F60	10
D2FL40U	34	D5CE12ST	24	D10JBB60V	16	D30FDC15ST	28	DE5SC6M	28	DG1S6A	24	KL3L07	46	M2FH3	24
D2FS4	24	D5CE15ST	24	D10JBB80V	16	D30JCB100K	22	DE5VE40	10	DL04-18F1	48	KL3N14	46	M2FL20U	34
D2FS6	24	D5FE60	10	D10SBS4	22	D30JCT120V	20	DE10S3L	26	DL04-33F1	48	KL3R20	46	M2FM3	24

# INDEX

Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page
M2FS10ST	24	MG060C100080A	20	P5B52HP2	58	P21F28HP2	58	P38LF6QNK	52	P70F7R5EN	54	S1NAD80	12	S20SC65WV	30
M2FS15ST	24	MG060E075160A	20	P5F50HP2	58	P22F10SN	54	P39LF6QTKD	56	P70LF4QL	52	S1NB60	14	S20VT60	20
M3F60	10	MG061B150080A	20	P5F60HP2	58	P22FE4SBK	54	P40B6SL	54	P70LF4QLK	52	S1NB80	14	S20VT80	20
M3FE40	10	MG061C200080A	20	P6B28HP2	58	P23F40HP2FM	58	P40B6SLK	54	P70LF4QN	52	S1NBB80	14	S20VTA60	20
M3FE60	10	MG061D100160A	20	P6B40HP2	58	P23LA10SL	52	P40B10SL	54	P70LF4QNK	52	S1NBC60	14	S20VTA80	20
M3FK60	34	MG061E150160A	20	P6B52HP2	58	P24B4SB	54	P40B10SN	54	P72LF7R5SL	52	S1NBC80	14	S20WB60	18
M3FL20U	34	MG061F200160A	20	P6F50HP2	58	P24B4SBK	54	P40F10SN	54	P72LF7R5SLK	52	S2K100	36	S20WB80	18
M3FS10ST	24	MG073A	18	P7F60HP2	58	P24B15SL	54	P40F12SN	54	P72LF7R5SN	52	S2L20U	36	S25VB60	18
M3FS15ST	24	MG074D	60	P7F90VX3	58	P24LF4QLK	52	P40LF12SL	52	P72LF7R5SNK	52	S2L40U	36	S25VB80	18
M5FS10ST	24	MG074E	60	P8B10SB	54	P24LF4QMK	52	P40LF12SLK	52	P74LF4PQLK	56	S2L60	36	S30K60T	36
M5FS15ST	24	MG074F	60	P8B10SBK	54	P24LF4QNK	52	P40LF12SN	52	P82F7R5SN	54	S2NBC100	14	S30K60V	36
MCZ5203SE	64	MG074G	60	P8B28HP2	58	P25B6EB	54	P40LF12SNK	52	P85GC28HP2F	58	S2V60	10	S30K100V	36
MCZ5205SE	64	MG074H	60	P8B30HP2	58	P25LA12SL	52	P41LF4QTKD	56	P86F6SN	54	S2V80	10	S30SC4MT	30
MCZ5207SG	64	MH2501SC	64	P8F28HP2	58	P25LF12SL	52	P42F6EN	54	P88LF6GMK	52	S2VB60	18	S30SC6MT	30
MCZ5208SG	64	MH2503SC	64	P8F50HP2	58	P25LF12SLK	52	P46LF7R5SL	52	P90LF6GLK	52	S3K60	36	S30TC15T	30
MCZ5209SN	64	MH2511SC	64	P8FE10SBK	54	P25LF12SN	52	P46LF7R5SLK	52	P90LG20GNK	54	S3L20U	36	S30V60T	12
MCZ5211ST	64	MH2513SC	64	P9B30HP2F	58	P25LF12SNK	52	P46LF7R5SN	52	P96LF4PQLK	56	S3L40U	36	S30V80V	12
MCZ5216ST	64	MS1003SH	64	P9B40HP2	58	P26B10SL	54	P46LF7R5SNK	52	P98LF6QL	52	S3L60	36	S30VT60	20
MCZ5217ST	64	MS1004SH	64	P10B28HP2	58	P26B10SLK	54	P50F10SN	54	P98LF6QLK	52	S3V60	10	S30VT80	20
MCZ5218ST	64	MS1007SH	64	P10F50HP2	58	P26B10SN	54	P50LF4QTKD	56	P98LF6QN	52	S3V80	10	S30VT160	20
MCZ5601SC	64	MV1001SC	62	P10F60HP2	58	P26F28HP2	58	P50LF6PQLK	56	P98LF6QNK	52	S3V100D	10	S30VTA60	20
MCZ5606SC	64	MV1002SC	62	P12F60HP2	58	P26FE10SLK	54	P50LF10SL	52	P104LG20GNK	54	S3WB60	18	S30VTA80	20
MCZ5607SC	64	MV1011SC	62	P12LF10SLKD	56	P26LF6GLK	52	P50LF10SLK	52	P105LF4QL	52	S4VB60	18	S30VTA160	20
MCZ5613SK	64	MV1012SC	62	P13F28HP2	58	P30B10EL	54	P50LF10SN	52	P105LF4QLK	52	S5VB60	18	S40HC1R5T	30
MF2003SV	64	MV2002SG	62	P13F50HP2	58	P30FE4SLK	54	P50LF10SNK	52	P105LF4QN	52	S10VB60	18	S40T15V	28
MF2007SW	64	MV2052SG	62	P14FE6SBK	54	P30FE6SLK	54	P54B4SLK	54	P105LF4QNK	52	S10VT60	20	S50VB60	18
MF2008SW	64	POR5B60HP2	58	P15F50HP2	58	P30LA10SL	52	P54B4SN	54	P120LF6GLK	52	S10VT80	20	S50VB80	18
MF2013SV	64	P1B52HP2	58	P15F60HP2	58	P30W60HP2V	58	P55F6EN	54	P120LF6GMK	52	S10VTA60	20	S60HC1R5T	30
MF6001ST	64	P1B90VX3K	58	P15F60HP2F	58	P32B12SLK	54	P56LA4SN	52	P120LG20GNK	54	S10VTA80	20	S60HC3T	30
MG001AK028060A	60	P1FE90VX3	58	P15LA12SL	52	P32B12SN	54	P56LF4PQLK	56	P130LG10GN	54	S10WB60	18	S60JC10V	30
MG001AL030060A	60	P1GF120VX3KA	58	P15LF6QTKD	56	P32F12SN	54	P56LF6GMK	52	P130LG10GNK	54	S15VB60	18	S60L120V	36
MG031B090004A	60	P1R5B40HP2	58	P16B6SB	54	P32LF10SL	52	P58LF6GLK	52	P140LF4QL	52	S15VT60	20	S60SC3LT	30
MG031E120004A	60	P2B60HP2F	58	P16B6SBK	54	P32LF10SLK	52	P60B4EL	54	P140LF4QLK	52	S15VT80	20	S60SC4MT	30
MG031G148004A	60	P2B90VX3K	58	P17F28HP2	58	P32LF10SN	52	P60B4SN	54	P140LF4QN	52	S15VTA60	20	S60SC6MT	30
MG031L080006A	60	P2GF90VX3KA	58	P17LF10SLKD	56	P32LF10SNK	52	P60B6EL	54	P140LF4QNK	52	S15VTA80	20	S90T15V	28
MG031MC148004A	60	P2R5B52HP2F	58	P18LA12SL	52	P33LF6QLKD	56	P60B6EN	54	P168LG10GN	54	S15WB60	18	SF3K60M	36
MG031MD110006A	60	P3B28HP2	58	P18LF6QLK	52	P33LF6QTKD	56	P60B6SN	54	P168LG10GNK	54	S20K60T	36	SF3L60U	36
MG031N110006A	60	P3F60HP2	58	P18LF6QNK	52	P34F6EL	54	P63LF6PQLK	56	P170FZ6QNKA	54	S20K100V	36	SF5K60M	36
MG032A4207R5A	60	P3GF90VX3KA	58	P19LA10SL	52	P35LF6PQLK	56	P64LF6QL	52	P180LF4RMK	52	S20LC20UST	38	SF5L40UM	36
MG032B420010A	60	P4B40HP2	58	P20B12SL	54	P36F25HP2	58	P64LF6QLK	52	P200LG10GN	54	S20LC30T	38	SF5L60U	36
MG038A200080A	20	P4B60HP2F	58	P20B12SLK	54	P36F28HP2	58	P64LF6QN	52	P200LG10GNK	54	S20LC40UT	38	SF5LC40UM	38
MG038B150080A	20	P4F60HP2	58	P20B12SN	54	P37LG65W3S	58	P64LF6QNK	52	P232LG10GN	54	S20LC40UV	38	SF8K60M	36
MG038C200160A	20	P4F90VX3	58	P20F50HP2	58	P38LF6QL	52	P66F7R5SN	54	P232LG10GNK	54	S20LC60UST	38	SF8K60USM	36
MG038D150160A	20	P4GF90VX3KA	58	P20FE12SLK	54	P38LF6QLK	52	P66F7R5SNK	54	P240FZ4QLA	54	S20LC60USV	38	SF10K60M	36
MG060B075080A	20	P5B50HP2F	58	P20LF4QTKD	56	P38LF6QN	52	P70F5EN	54	P240FZ4QNKA	54	S20SC9MT	30	SF10KC60M	38

# INDEX











Type No.	Page	Type No.	Page	Type No.	Page	Type No.	Page
SF10L60AM	36	SG30TC12M	30	ST06-18CE	48	WS10FB65AK	26
SF10L60MSM	36	SG30TC15M	30	ST06-27CE	48	WS10SF65AK	28
SF10L60MVM	36	SG40TC10M	30	ST06-30CE	48	WS10SF120AK	28
SF10L60U	36	SG40TC12M	30	ST06-33CE	48	WS20FB65AK	26
SF10L65ZSM	36	ST02-12G1	48	ST06-36CE	48	WS20FBC65AK	28
SF10L65ZVM	36	ST02-14G1	48	ST06-39CE	48	WS20GC65AK	28
SF10LC40UM	38	ST02-16G1	48	ST20-18FY	48	WS20GCC65AK	30
SF20K60M	36	ST02-18G1	48	ST20-27F2	48	WS20GCC120AK	30
SF20KC60M	38	ST02-20G1	48	ST20-27FY	48	WS20SF65AK	28
SF20L60AM	36	ST02-24G1	48	ST20-30F2	48	WS20SFC65AK	30
SF20L60MSM	36	ST02-27G1	48	ST20-30FY	48	WS40GCC65AK	30
SF20L60MVM	36	ST02-30G1	48	ST20-33F2	48		
SF20L60U	36	ST02-33G1	48	ST20-33FY	48		
SF20L65ZSM	36	ST02-36G1	48	ST20-36F2	48		
SF20L65ZVM	36	ST02-39G1	48	ST20-36FY	48		
SF20LC30M	38	ST02-43G1	48	ST20-39FY	48		
SG5L20USM	36	ST02-47G1	48	ST20-47F2	48		
SG5LC20USM	38	ST02-58G1	48	ST60-40MF	50		
SG5S4M	28	ST02-75F1	48	ST60-48MF	50		
SG5S6M	28	ST02-82F1	48	ST70-22MF	50		
SG5S9M	28	ST02-100F1	48	ST70-27F	50		
SG8SC4M	30	ST02-120F1	48	ST70-27FZ	50		
SG10L20USM	36	ST02-140F1	48	ST70-27MF	50		
SG10LC20USM	38	ST02-170F1	48	ST70-30MF	50		
SG10SC3LM	30	ST02-200F1	48	ST80-14MF	50		
SG10SC4M	30	ST02-280F1	48	UD2KB80	16		
SG10SC6M	30	ST02-320F1	48	UD2KB80H	16		
SG10SC9M	30	ST02D-140F2	50	UD3KB80	16		
SG10TC15M	30	ST02D-170F2	50	UD3KB80H	16		
SG15SC4M	30	ST03-43F1	48	UD4KB80	16		
SG15SC6M	30	ST03-47F1	48	UD6KBA80	16		
SG20JC6M	30	ST03-58F1	48	UD6KBA80H	16		
SG20LC20USM	38	ST03-68F1	48	UD8KBA80	16		
SG20SC3LM	30	ST03-240F1	48	US8KB80R	16		
SG20SC4M	30	ST04-12F1	48	US8KBA80R	16		
SG20SC6M	30	ST04-14F1	48	US10KB80R	16		
SG20SC9M	30	ST04-16F1	48	US15KB80R	16		
SG20TC10M	30	ST04-18F1	48	US15KB80HR	16		
SG20TC12M	30	ST04-20F1	48	US20KB80R	16		
SG20TC15M	30	ST04-24F1	48	US20KB80HR	16		
SG30JC6M	30	ST04-27F1	48	US25KB80R	16		
SG30SC3LM	30	ST04-30F1	48	US25KB80HR	16		
SG30SC4M	30	ST04-33F1	48	US30KB80R	16		
SG30SC6M	30	ST04-36F1	48	US30KBV80FR	16		
SG30TC10M	30	ST04-39F1	48	VR61F1	46		




# GENERAL RECTIFYING DIODES

General Rectifying Diodes are defined as high-voltage and PN junction type devices.

These devices utilize our original glass passivation which is physically stable with a superior structure for resistance against heat and humidity. Variations are available for breakdown voltage up to 800V and output current from 1 to 30A.

## Single

Surface Mount							
Package	JEDEC Code JEITA Code House Name	Fig.	IF (AV) [A]	VRRM [V]			Remarks
				400	600	800	
 3.9 × 1.8 × 1.4(mm)	DO-219AA similar M1F	B2	1		M1F60 M1FE60	M1F80	① — >— ②
			2	M1FE40			
 5.0 × 2.5 × 2.0(mm)	DO-214AC 1F	B3-1	1		D1F60 D1FE60		
			1.1		LN1F60		
			1.2		D1F60A		
 4.7 × 2.4 × 0.98(mm)	SC-110B CE	B5-1	3		D3CE60V		
			3.5		D3CE60VE		
 5.1 × 3.75 × 2.0(mm)	DO-214AA similar M2F	B6	1.2		M2F60		
			3	M3FE40	M3F60 M3FE60		
 7.6 × 4.0 × 2.8(mm)	DO-214AA similar 2F	B9-1	1.4		D2F60		
			3		D3F60 D3FE60		
			4		D4F60		
			5		D5FE60		
 9.5 × 6.6 × 2.65(mm)	SC-63 E-pack	G1-5	5	DE5VE40			①④ — >— ② N.C. ③
 6.5 × 4.5 × 1.1(mm)	TO-277A similar FY	G4-1	10		D10FY60VE		① — >— ②③
 9.6 × 6.6 × 2.3(mm)	TO-252AA similar FR	G5	10		D10FR60V		① — >— ②④ N.C. ③
			15		D15FR60V		
 13.2 × 10.2 × 4.7(mm)	SC-83 similar STO-220	H1-2	25		DF25V60		①②④ — >— ③
 13.2 × 10.2 × 4.6(mm)	SC-83 similar FD	H2-1	25		D25FD60V		① — >— ②④ N.C. ③

Axial							
Package	JEDEC Code JEITA Code House Name	Fig.	IF (AV) [A]	VRRM [V]			Remarks
				400	600	800	
 3.0 × φ 2.6(mm)	AX057	A1	1		D1N60	D1N80	① — >— ②
 7.0 × φ 4.4(mm)	AX10	A5-1	1.7		S2V60	S2V80	
 7.0 × φ 4.4(mm)	AX14	A7	3			S3V100D	
			3.5		S3V60	S3V80	

## Single

Surface Mount															
JEDEC Code JEITA Code House Name	Fig.	Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive
			VRRM [V]	IF (AV) [A]	Conditions Ta [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	IR (max) Vr=VRRM [μA]	VESD (typ) [kV]				
DO-219AA similar M1F	B2	M1F60	600	1	25	25	150	1.10	1	10	—	—	—	—	○
		M1FE60	600	1	129 *1	30	150	1.10	1	10	25	—	—	○	○
		M1F80	800	1	25	25	150	1.10	1	10	—	—	—	—	○
		M1FE40	400	2	103 *2	25	150	1.10	1	10	—	—	—	—	○
DO-214AC 1F	B3-1	D1F60	600	1	25	25	150	1.10	1	10	—	—	—	—	○
		D1FE60	600	1	126 *1	30	150	1.10	1	10	25	—	—	○	○
		LN1F60 *3	600	1.1	25	25	150	1.05	0.8	10	—	—	—	—	○
		D1F60A	600	1.2	25	45	150	0.97	1.2	10	—	—	—	—	○
SC-110B CE	B5-1	D3CE60V	600	3	101 *1	50	150	1.10	3	10	—	—	—	—	○
		D3CE60VE	600	3.5	93 *1	60	-55 to 150	1.10	3.5	10	25	—	—	○	■
DO-214AA similar M2F	B6	M2F60	600	1.2	51	50	150	0.97	1.2	10	—	—	—	—	○
		M3FE40	400	3	76 *1	75	150	1.10	3	10	30	—	—	○	○
		M3F60	600	3	100 *1	90	150	1.05	3	10	—	—	—	—	○
		M3FE60	600	3	76 *1	90	150	1.05	3	10	25	—	—	—	○
DO-214AA similar 2F	B9-1	D2F60	600	1.4	25	60	150	1.05	1.4	10	—	—	—	—	○
		D3F60	600	3	80 *1	150	150	1.05	3	10	—	—	—	—	○
		D3FE60	600	3	105 *1	150	150	1.05	3	10	25	—	—	—	○
		D4F60	600	4	68 *1	200	150	0.95	4	10	—	—	—	—	○
		D5FE60	600	5	82 *1	300	150	0.95	5	10	25	—	—	—	○
SC-63 E-pack	G1-5	DE5VE40	400	5	130 *2	80	150	1.00	5	10	30	—	—	—	■
TO-277A similar FY	G4-1	D10FY60VE	600	10	120 *1	220	-55 to 150	1.10	10	10	25	—	—	—	○
TO-252AA similar FR	G5	D10FR60V	600	10	130 *2	200	-55 to 150	1.05	10	10	—	—	—	—	■
		D15FR60V	600	15	125 *2	300	-55 to 150	1.05	15	10	—	—	—	—	■
SC-83 similar STO-220	H1-2	DF25V60	600	25	136 *2	400	150	1.10	25	10	—	—	—	—	○
SC-83 similar FD	H2-1	D25FD60V	600	25	113 *2	450	150	1.10	25	10	—	—	—	—	○



\*1 : Tl \*2 : Tc \*3 : trr(max)=3.5μs ■ : Please contact us.



Axial															
JEDEC Code JEITA Code House Name	Fig.	Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive
			VRRM [V]	IF (AV) [A]	Conditions Ta [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	IR (max) Vr=VRRM [μA]	VESD (typ) [kV]				
AX057	A1	D1N60	600	1	25	30	150	1.05	1	10	—	—	—	—	—
		D1N80	800	1	25	30	150	1.05	1	10	—	—	—	—	—
AX10	A5-1	S2V60	600	1.7	40	60	150	1.05	1.7	10	—	—	—	—	—
		S2V80	800	1.7	40	60	150	1.05	1.7	10	—	—	—	—	—
AX14	A7	S3V100D	800	3	130 *1	150	150	1.05	3	10 *2	—	—	—	—	—
		S3V60	600	3.5	40	120	150	1.05	2.6	10	—	—	—	—	—
		S3V80	800	3.5	40	120	150	1.05	2.6	10	—	—	—	—	—

\*1 : Tl \*2 : Vr=1000V






# GENERAL RECTIFYING DIODES

## Single



Two Terminal Type							
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				400	600	800	
 41.0 × 16.0 × 5.0(mm)	TO-247AD — MTO-3PT	K2	30		S30V60T		

Three Terminal Type							
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				400	600	800	
 41.0 × 16.0 × 5.0(mm)	TO-247AD — MTO-3PV	K6	30		S30V80V		

## Array

Surface Mount							
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				400	600	800	
 10.0 × 6.8 × 2.6(mm)	— — 1NA	C6-2	3		S1NAD80		
 13.2 × 10.2 × 4.7(mm)	— SC-83 similar STO-220	H1-5	5		DF5VD60		
			15		DF15VD60		
		H1-7	16		DF16VC60R		

## Diode Module

Diode Module							
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				400	600	800	
 22.3 × 22.3 × 25.0(mm)	— — D30VC	E2	30		D30VC60		

## Single

Two Terminal Type														
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	Based on AEC-Q101	Automotive	
JEDEC Code JEITA Code House Name	Fig.		V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]				V <sub>ESD</sub> (typ) [kV]
TO-247AD — MTO-3PT	K2	S30V60T	600	30	119	360	150	1.1	30	10	—	—	—	—

Three Terminal Type														
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	Based on AEC-Q101	Automotive	
JEDEC Code JEITA Code House Name	Fig.		V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]				V <sub>ESD</sub> (typ) [kV]
TO-247AD — MTO-3PV	K6	S30V80V	800	30	131	450	150	1.1	30	10	—	—	—	○

## Array

Surface Mount														
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	Based on AEC-Q101	Automotive	
JEDEC Code JEITA Code House Name	Fig.		V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]				V <sub>ESD</sub> (typ) [kV]
— — 1NA	C6-2	S1NAD80	800	3	102 *	110	150	1.05	0.75	10	—	—	—	—
— SC-83 similar STO-220	H1-5	DF5VD60	600	5	140	140	150	1.05	2.50	10	—	—	—	—
		DF15VD60	600	15	127	190	150	1.05	7.50	10	—	—	—	—
	H1-7	DF16VC60R	600	16	124	190	150	1.05	8.00	10	—	—	—	—

\* : Tl

## Diode Module

Diode Module														
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	Based on AEC-Q101	Automotive	
JEDEC Code JEITA Code House Name	Fig.		V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]				V <sub>ESD</sub> (typ) [kV]
— — D30VC	E2	D30VC60	600	30	124	300	150	1.05	15	10	—	—	—	—







# BRIDGE DIODES

Bridge Diodes are suitable for the rectification of commercial frequency.




Variations are available for various packaging as well as high voltage (Max 1600V), high IFSM, low VF, and low noise.

## Small Bridge Diodes

Surface Mount							
Package	JEDEC Code JEITA Code House Name	Fig.	IF (AV) [A]	VRRM [V]			Remarks
				600	800	1000	
 6.2 × 5.15 × 1.45(mm)	— — SOPA-4	C1	1		D1UBA80		
			3		★ D3UBA80		
 10.0 × 6.8 × 2.6(mm)	— — 1N	C4	1	S1NB60	S1NB80		
			1	S1NBB80			
 10.0 × 6.8 × 2.6(mm)	— — 1NA	C6-1	1.5	S1NBC60	S1NBC80		
			2			S2NBC100	

★ : Under development

## THD (Through Hole Device)

THD (Through Hole Device)							
Package	JEDEC Code JEITA Code House Name	Fig.	IF (AV) [A]	VRRM [V]			Remarks
				600	800	1000	
 6.5 × 6.8 × 2.5(mm)	— — 1N	C5	1	S1NB60	S1NB80		
			1		S1NBB80		
 6.5 × 6.8 × 2.5(mm)	— — 1NA	C7	1.5	S1NBC60	S1NBC80		
			2			S2NBC100	

## Small Bridge Diodes

Surface Mount														
Package		Type No.	Spec. Code	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	UL	Automotive
JEDEC Code JEITA Code House Name	Fig.			VRRM [V]	IF (AV) [A]	Conditions Ta [°C]	IFSM [A]	Tj [°C]	VF (max) [V]	Conditions IF [A]	IR (max) VR=VRRM [μA]			
—	C1	D1UBA80	-7062	800	1	25	30	150	0.95	0.4	10	—	—	—
— SOPA-4		★ D3UBA80	-7062	800	3	93 *2	60	-55 to 150	1.00	1.5	10	—	—	—
—	C4	S1NB60	-7062	600	1	25	30	150	1.05	0.5	10	—	—	—
— 1N		S1NB80	-7062	800	1	25	30	150	1.05	0.5	10	—	—	—
—	C6-1	S1NBB80	-7062	800	1	26	50	150	1.05	0.5	10	—	—	—
—		S1NBC60	-7062	600	1.5	105 *1	60	150	1.05	0.75	10	—	—	—
—		S1NBC80	-7062	800	1.5	105 *1	60	150	1.05	0.75	10	—	—	—
— 1NA		S2NBC100	-7062	1000	2	93 *1	65 *3	150	1.05	1	10	—	—	—

★ : Under development \*1 : Tl \*2 : Tc \*3 : 60Hz

## THD (Through Hole Device)

THD (Through Hole Device)														
Package		Type No.	Spec. Code	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	UL	Automotive
JEDEC Code JEITA Code House Name	Fig.			VRRM [V]	IF (AV) [A]	Conditions Ta [°C]	IFSM [A]	Tj [°C]	VF (max) [V]	Conditions IF [A]	IR (max) VR=VRRM [μA]			
—	C5	S1NB60	-7101	600	1	25	30	150	1.05	0.5	10	—	—	—
— 1N		S1NB80	-7101	800	1	25	30	150	1.05	0.5	10	—	—	—
—	C7	S1NBB80	-7101	800	1	26	50	150	1.05	0.5	10	—	—	—
—		S1NBC60	-7101	600	1.5	105 *1	60	150	1.05	0.75	10	—	—	—
—		S1NBC80	-7101	800	1.5	105 *1	60	150	1.05	0.75	10	—	—	—
— 1NA		S2NBC100	-7101	1000	2	93 *1	65 *2	150	1.05	1	10	—	—	—

\*1 : Tl \*2 : 60Hz

# BRIDGE DIODES

## SIP (Single In-line Package) Bridge Diodes

THD (Through Hole Device)							Remarks
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			
				600	800	1000	
	-	D3K	D1	2	UD2KB80		
				3	★ UD2KB80H		
				4	UD3KB80		
				6	UD6KBA80		
	-	2S	D2	1.5	D2SBA60		
				2	D2SB60A		
	-	JB	D5	6	D6JBB60V	D6JBB80V	
				8	D8JBB60V	D8JBB80V	
				10	D10JBB60V	D10JBB80V	
	-	3S	D3	4	D3SBA60	D3SB80	
				10	D10XB60	D10XB80	
	-	D6K	D11	8	US8KB80R		
				10	US10KB80R		
				15	US15KB80HR		
				20	US20KB80HR		
				25	US25KB80HR		
	-	JA	D6	15	D15JAB60V	D15JAB80V	
				25	D25JAB60V	D25JAB80V	
	-	5S	D4	6	D5SBA60	D5SB80	
				15	D15XB60	D15XB80	D15XB100
				20	D20XB60	D20XB80	
				25	D25XB60	D25XB80	D25XB100
				30	D30XB80		
				35	D35XB80		
				45	D45XB80		
	-	TSB(4pin)	D7	50	D50XB80		
				50	D50JCB80V		

■ : New product ★ : Under development



## SIP (Single In-line Package) Bridge Diodes

THD (Through Hole Device)														
JEDEC Code JEITA Code House Name	Fig.	Type No.	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	UL	Automotive	
			V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]				
-	D3K	D1	UD2KB80	800	2 *3	143	62 *3	150	1.05	1	10	-	UL	-
			★ UD2KB80H	800	2 *3	TBD	90 *3	-55 to 150	1.00	1	10	-	UL	-
			UD3KB80	800	3 *3	140	90 *3	150	1.05	1.5	10	-	UL	-
			★ UD3KB80H	800	3 *3	TBD	135 *3	-55 to 150	1.00	1.5	10	-	UL	-
			UD4KB80	800	4 *3	138	135 *3	150	1.00	2	10	-	UL	-
			UD6KBA80	800	6 *3	131	135 *3	150	1.05	3	10	-	UL	-
			★ UD6KBA80H	800	6 *3	TBD	165 *3	-55 to 150	1.00	3	10	-	UL	-
-	2S	D2	D2SBA60	600	1.5	25 *1	60	150	1.05	0.75	10	-	-	-
			D2SB60A	600	1.5	25 *1	80	150	1.05	0.75	10	-	-	-
-	JB	D5	D6JBB60V	600	6	131	100	150	1.05	3	10	-	UL	-
			D6JBB80V	800	6	131	100	150	1.05	3	10	-	UL	-
			D8JBB60V	600	8	130	130	150	1.05	4	10	-	UL	-
			D8JBB80V	800	8	130	130	150	1.05	4	10	-	UL	-
			D10JBB60V	600	10	129	150	150	1.05	5	10	-	UL	-
-	3S	D3	D3SBA60	600	4	108	80	150	1.05	2	10	-	UL	-
			D3SB60	600	4	108	120	150	1.05	2	10	-	UL	-
			D4SB60L	600	4	111	150	150	0.95	2	10	-	UL	-
			D3SB80	800	4	108	120	150	1.05	2	10	-	UL	-
			D4SB80	800	4	108	150	150	0.95	2	10	-	UL	-
			D10XB60	600	10	100	120	150	1.10	5	10	-	UL	-
			D10XB80	800	10	112	170	150	1.05	5	10	-	UL	-
-	D6K	D11	US8KB80R	800	8 *3	108	200 *3	150	1.00	4	10	-	UL	-
			■ US8KBA80R	800	8 *3	110	150 *3	-55 to 150	1.05	4	10	-	UL	-
			US10KB80R	800	10 *3	100	150 *3	150	1.10	5	10	-	UL	-
			■ US15KB80HR	800	15 *3	113	240 *3	-55 to 150	1.05	7.5	10	-	UL	-
			US15KB80R	800	15 *3	101	200 *3	-55 to 150	1.10	7.5	10	-	UL	-
			■ US20KB80HR	800	20 *3	109	300 *3	-55 to 150	1.05	10	10	-	UL	-
			US20KB80R	800	20 *3	97	240 *3	150	1.10	10	10	-	UL	-
			■ US25KB80HR	800	25 *3	109	350 *3	-55 to 150	1.05	12.5	10	-	UL	-
			■ US25KB80R	800	25 *3	98	300 *3	-55 to 150	1.05	12.5	10	-	UL	-
			US30KB80R	800	30 *3	97	350 *3	-55 to 150	1.10	15	10	-	UL	-
			US30KBV80FR	800	30 *3	126	350 *3	-55 to 175	1.05	15	5	○	UL	-
-	JA	D6	D15JAB60V	600	15	110	200	150	1.05	7.5	10	-	UL	-
			D15JAB80V	800	15	110	200	150	1.05	7.5	10	-	UL	-
			D25JAB60V	600	25	107	350	150	1.05	12.5	10	-	UL	-
-	5S	D4	D5SBA60	600	6	111	120	150	1.05	3	10	-	UL	-
			D5SB60	600	6	110	170	150	1.05	3	10	-	UL	-
			D6SB60L	600	6	112	170	150	1.05	3	10	-	UL	-
			D5SB80	800	6	110	170	150	1.05	3	10	-	UL	-
			D6SB80	800	6	110	170	150	1.05	3	10	-	UL	-
			D15XB60	600	15	100	200	150	1.10	7.5	10	-	UL	-
			D15XB60H	600	15	107	240	150	1.05	7.5	10	-	UL	-
			D15XB80	800	15	100	200	150	1.10	7.5	10	-	UL	-
			■ D15XB80H	800	15	107	240	-40 to 150	1.05	7.5	10	-	UL	-
			D15XB100	1000	15	110	200	150	1.10	7.5	10	-	UL	-
			D20XB60	600	20	87	240	150	1.10	10	10	-	UL	-
			D20XB80	800	20	87	240	150	1.10	10	10	-	UL	-
			D25XB60	600	25	98	350	150	1.05	12.5	10	-	UL	■
			D25XB80	800	25	98	350	150	1.05	12.5	10	-	UL	■
			■ D25XBA80	800	25 *3	87	300 *3	-55 to 150	1.05	12.5	10	-	UL	-
			D25XB100	1000	25	106	350	150	1.05	12.5	10	-	UL	-
			■ D30XB80	800	30 *3	87	400 *3	-55 to 150	1.05	15	10	-	UL	-
D35XB80	800	35	93	603 *3	-55 to 150	1.05	17.5	10	-	UL	-			
■ D35XBA80	800	35 *3	74	400 *3	-55 to 150	1.05	17.5	10	-	UL	-			
■ D40XB80	800	40 *3	85	603 *3	-55 to 150	1.00	20	10	-	UL	-			
■ D40XBA80	800	40 *3	62	400 *3	-55 to 150	1.05	20	10	-	UL	-			
■ D40XB100	1000	40	85	603 *3	-55 to 150	1.05	20	10	-	UL	-			
■ D45XB80	800	45 *3	74	603 *3	-55 to 150	1.05	22.5	10	-	UL	-			
★ D50XBA100	1000	50	67	603 *3	-55 to 150	1.02	25	10	-	UL	-			
-	TSB(4pin)	D7	D50XB80	800	50	95	600	150	1.05	25	10	-	UL	-
			D50JCB80V	800	50	94	600	150	1.05	25	10	-	UL	■









■ : New product ★ : Under development \*1 : Ta \*2 : Tl \*3 : 60Hz ■ : Please contact us. UL : UL recognized (UL File No. E142422)

# BRIDGE DIODES








## DIP (Dual In-line Package) Bridge Diode

Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				600	800	1000	
 45.7 × 30.0 × 8.6(mm)	— — JH	D10-1	70		D70JHB80V		

## SQIP (Square In-line Package) Bridge Diodes

Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				600	800	1000	
 13.0 × 13.0 × 27.5(mm)	— — S2VB	E3	2	S2VB60			
 17.0 × 17.0 × 32.5(mm)	— — S4VB	E4	4	S4VB60			
 25.0 × 25.0 × 32.5(mm)	— — S5VB	E5	6	S5VB60			
 22.0 × 22.0 × 32.5(mm)	— — S10VB	E6	10	S10VB60			
 26.5 × 26.5 × 25.0(mm)	— — S15VB	E7	15	S15VB60			
 32.0 × 32.0 × 25.0(mm)	— — S25VB	E8	25	S25VB60	S25VB80		
 36.0 × 36.0 × 24.0(mm)	— — S50VB	E9	50	S50VB60	S50VB80		

## Input/Output In-line Terminal Type

Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				600	800	1000	
 17.0 × 17.0 × 31.0(mm)	— — S3WB	E10	2.3	S3WB60			
 22.5 × 22.5 × 32.5(mm)	— — S10WB	E11	10	S10WB60			
 26.5 × 26.5 × 32.5(mm)	— — S15WB	E12	15	S15WB60			
 32.5 × 32.5 × 32.5(mm)	— — S20WB	E13	20	S20WB60	S20WB80		
 57.5 × 47.5 × 17.0(mm)	— — MG073	F12	100		★ MG073A		

★ : Under development

## DIP (Dual In-line Package) Bridge Diode

Package			Absolute Maximum Ratings					Electrical Characteristics			Halogen free	UL	Automotive
JEDEC Code JEITA Code House Name	Fig.	Type No.	V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>F(SM)</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]			
— — JH	D10-1	D70JHB80V	800	70	99	500	-55 to 150	1.1	35	10	—	—	—

## SQIP (Square In-line Package) Bridge Diodes

Package			Absolute Maximum Ratings					Electrical Characteristics			Halogen free	UL	Automotive
JEDEC Code JEITA Code House Name	Fig.	Type No.	V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>F(SM)</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]			
— — S2VB	E3	S2VB60	600	2 *1	40	40	150	1.05	1	10	—	—	—
— — S4VB	E4	S4VB60	600	4	40	80	150	1.05	2	10	—	—	—
— — S5VB	E5	S5VB60	600	6	40	200	150	1.05	3	10	—	—	—
— — S10VB	E6	S10VB60	600	10	40	200	150	1.05	5	10	—	—	—
— — S15VB	E7	S15VB60	600	15	83 *2	200	150	1.05	7.5	10	—	—	—
— — S25VB	E8	S25VB60	600	25	85 *2	400	150	1.05	12.5	10	—	—	—
— — S25VB		S25VB80	800	25	85 *2	400	150	1.05	12.5	10	—	—	—
— — S50VB	E9	S50VB60	600	50	95 *2	500	150	1.05	25	10	—	—	—
— — S50VB		S50VB80	800	50	95 *2	500	150	1.05	25	10	—	UL	—

\*1 : Without heatsink \*2 : T<sub>C</sub> UL : UL recognized (UL File No. E142422)






## Input/Output In-line Terminal Type

Package			Absolute Maximum Ratings					Electrical Characteristics			Halogen free	UL	Automotive
JEDEC Code JEITA Code House Name	Fig.	Type No.	V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>F(SM)</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]			
— — S3WB	E10	S3WB60	600	2.3	40 *	120	150	1.05	2	10	—	—	—
— — S10WB	E11	S10WB60	600	10	74	170	150	1.05	5	10	—	—	—
— — S15WB	E12	S15WB60	600	15	77	200	150	1.05	7.5	10	—	—	—
— — S20WB	E13	S20WB60	600	20	76	500	150	1.05	10	10	—	—	—
— — S20WB		S20WB80	800	20	76	500	150	1.05	10	10	—	UL	—
— — MG073	F12	★ MG073A	800	100	TBD	1200	150	1.17	50	10	—	—	—







★ : Under development \* : T<sub>a</sub> UL : UL recognized (UL File No. E142422)

# BRIDGE DIODES

## 3 Phase Bridge Diodes

THD (Through Hole Device)							
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				800	1200	1600	
 47.0 × 45.7 × 7.5(mm)	— — TSB(5pin)	D8	30	D30XT80			
			45	D45XT80		D45XT160	
 47.0 × 45.7 × 7.5(mm)	— — JC(5pin)	D8	30		D30JCT120V		
			45		D45JCT120V	D45JCT160V	
 47.0 × 45.7 × 7.5(mm)	— — JF	D9	75	D75JFT80V			
 45.7 × 30.0 × 8.6(mm)	— — JH	D10-2	100	D100JHT80V	D100JHT120V	D100JHT160V	

## 3 Phase Bridge Diodes

3 Phase Bridge Diodes							
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]			Remarks
				600	800	1600	
 36.0 × 36.0 × 24.0(mm)	— — SVT	E15	10	S10VT60	S10VT80		
			15	S15VT60	S15VT80		
			20	S20VT60	S20VT80		
			30	S30VT60	S30VT80	S30VT160	
 36.0 × 36.0 × 23.0(mm)	— — SVTA	E14	10	S10VTA60	S10VTA80		
			15	S15VTA60	S15VTA80		
			20	S20VTA60	S20VTA80		
			30	S30VTA60	S30VTA80	S30VTA160	
 89.0 × 50.0 × 16.6(mm)	— — MG038	F7	150		MG038B150080A	MG038D150160A	
			200		MG038A200080A	MG038C200160A	
 84.5 × 46.0 × 17.0(mm)	— — MG060	F9	75		★MG060B075080A	★MG060E075160A	
			100		★MG060C100080A		
 91.0 × 52.0 × 17.0(mm)	— — MG061	F10	100			★MG061D100160A	
			150		★MG061B150080A	★MG061E150160A	
			200		★MG061C200080A	★MG061F200160A	

★ : Under development

## 3 Phase Bridge Diodes

THD (Through Hole Device)													
JEDEC Code JEITA Code House Name	Fig.	Type No.	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	UL	Automotive
			V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>c</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>j</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RM</sub> [μA]			
— — TSB(5pin)	D8	D30XT80	800	30	117	300	150	1.05	10	10	—	UL	—
		D45XT80	800	45	101	400	150	1.05	15	10	—	UL	—
		D45XT160	1600	45	97	360 *	150	1.05	15	100	—	UL	—
— — JC(5pin)	D8	D30JCT120V	1200	30	116	300	150	1.05	10	10	—	UL	—
		D45JCT120V	1200	45	99	450	150	1.05	15	10	—	UL	—
		D45JCT160V	1600	45	97	450	150	1.05	15	10	—	UL	—
— — JF	D9	D75JFT80V	800	75	109	400	150	1.05	25	10	—	—	—
— — JH	D10-2	D100JHT80V	800	100	99	500	-55 to 150	1.10	35	10	—	UL	—
		D100JHT120V	1200	100	92	450	-55 to 150	1.17	35	10	—	UL	—
		D100JHT160V	1600	100	92	540	-55 to 150	1.15	35	10	—	UL	—

\* : 60Hz UL : UL recognized (UL File No. E142422)

## 3 Phase Bridge Diodes







3 Phase Bridge Diodes													
JEDEC Code JEITA Code House Name	Fig.	Type No.	Absolute Maximum Ratings					Electrical Characteristics			Halogen free	UL	Automotive
			V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>c</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>j</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RM</sub> [μA]			
— — SVT	E15	S10VT60	600	10	137	170	150	1.05	3.5	10	—	—	—
		S10VT80	800	10	137	150	150	1.05	3.5	10	—	—	—
		S15VT60	600	15	132	200	150	1.05	5	10	—	—	—
		S15VT80	800	15	132	200	150	1.05	5	10	—	—	—
		S20VT60	600	20	128	300	150	1.05	7	10	—	—	—
		S20VT80	800	20	128	300	150	1.05	7	10	—	—	—
		S30VT60	600	30	121	400	150	1.05	10	10	—	—	—
		S30VT80	800	30	121	400	150	1.05	10	10	—	UL	—
		S30VT160	1600	30	116	350	150	1.05	10	100	—	—	—
— — SVTA	E14	S10VTA60	600	10	137	170	150	1.05	3.5	10	—	—	—
		S10VTA80	800	10	137	150	150	1.05	3.5	10	—	—	—
		S15VTA60	600	15	132	200	150	1.05	5	10	—	—	—
		S15VTA80	800	15	132	200	150	1.05	5	10	—	—	—
		S20VTA60	600	20	128	300	150	1.05	7	10	—	—	—
		S20VTA80	800	20	128	300	150	1.05	7	10	—	—	—
		S30VTA60	600	30	121	400	150	1.05	10	10	—	—	—
		S30VTA80	800	30	121	400	150	1.05	10	10	—	—	—
		S30VTA160	1600	30	116	350	150	1.05	10	100	—	—	—
— — MG038	F7	MG038B150080A	800	150	125	1650	150	1.05	50	10	○	UL	—
		MG038D150160A	1600	150	125	1600	150	1.05	50	10	○	UL	—
		MG038A200080A	800	200	125	1950	150	1.05	67	10	○	UL	—
		MG038C200160A	1600	200	125	2000	150	1.05	67	10	○	UL	—
— — MG060	F9	★MG060B075080A	800	75	125	TBD	150	1.10	25	10	○	to be certified	—
		★MG060E075160A	1600	75	125	TBD	150	1.13	25	10	○	to be certified	—
		★MG060C100080A	800	100	125	TBD	150	1.13	34	10	○	to be certified	—
— — MG061	F10	★MG061D100160A	1600	100	125	TBD	150	1.17	34	10	○	to be certified	—
		★MG061B150080A	800	150	125	TBD	150	1.16	50	10	○	to be certified	—
		★MG061E150160A	1600	150	125	TBD	150	1.20	50	10	○	to be certified	—
		★MG061C200080A	800	200	123	TBD	150	1.18	67	10	○	to be certified	—
★MG061F200160A	1600	200	122	TBD	150	1.22	67	10	○	to be certified	—		

★ : Under development UL : UL recognized (UL File No. E142422)

# BRIDGE DIODES





Series	Feature
S	Evenly balanced Vf and Ir
N	Low Vf, High Voltage
K	Low Vf

## Low Vf Bridge Diodes





THD (Through Hole Device)							
Package	JEDEC Code JEITA Code House Name	Fig.	If (AV) [A]	VRRM [V]			Remarks
				600	800	1000	
 37.5 × 30.0 × 4.6(mm)	— — 5S	D4	15	LL15XB60			
			25	LL25XB60 LK25XB60			
 37.1 × 22.1 × 3.45(mm)	— — D6K	D11	25	 LM25KBV60FR			
			30	 LM30KBV60FR			

 : New product





## Low Noise Bridge Diodes

Surface Mount-THD (Through Hole Device)							
Package	JEDEC Code JEITA Code House Name	Fig.	If (AV) [A]	VRRM [V]			Remarks
				600	800	1000	
 32.5 × 25.0 × 4.6(mm)	— — 3S	D3	4	LN4SB60			
			6	LN6SB60			
 37.5 × 30.0 × 4.6(mm)	— — 5S	D4	15	LN15XB60 LN15XB60H			
			25	LN25XB60			



## High Speed Bridge Diodes (SBD)



THD (Through Hole Device)							
Package	JEDEC Code JEITA Code House Name	Fig.	If (AV) [A]	VRRM [V]			Remarks
				40	60	200	
 32.5 × 25.0 × 4.6(mm)	— — 3S	D3	4	D4SBS4	D4SBS6	D4SBN20	
			10	D10SBS4			
			15		D15XS6		
 37.5 × 30.0 × 4.6(mm)	— — 5S	D4	6			D6SBN20	
			15			D15XBN20	
			20		D20XS6		
			30			D30XBN20	

## High Speed Bridge Diodes (FRD)



THD (Through Hole Device)							
Package	JEDEC Code JEITA Code House Name	Fig.	If (AV) [A]	VRRM [V]			Remarks
				200	400	1000	
 32.5 × 25.0 × 4.6(mm)	— — 3S	D3	4	D4SBL20U			
			30				
 47.0 × 45.7 × 7.5(mm)	— — JC(4pin)	D7	30			D30JCB100K	

## Low Vf Bridge Diodes

THD (Through Hole Device)														
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	UL	Automotive
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	If (AV) [A]	Conditions Tc [°C]	IfSM [A]	Tj [°C]	Vf (max) [V]	Conditions If [A]	Ir (max) Vr=VRRM [μA]	trr (max) [μs]			
— — 5S	D4	LL15XB60	600	15	124	200	150	0.90	7.5	10	3	—	—	—
		LL25XB60	600	25	113	300	150	0.92	12.5	10	3	—	—	■
		LK25XB60	600	25	114	603 *	-55 to 150	0.95	12.5	10	5	—	—	—
— — D6K	D11	 LM25KBV60FR	600	25	115	350 *	-55 to 150	0.91	12.5	10	3	○	—	—
		 LM30KBV60FR	600	30	106	350 *	-55 to 150	0.92	15	10	3	○	—	—

 : New product \* : 60Hz ■ : Please contact us.  : UL recognized (UL File No. E142422)

## Low Noise Bridge Diodes


Surface Mount-THD (Through Hole Device)															
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				UL	Halogen free	Automotive	Remarks
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	If (AV) [A]	Conditions Tc [°C]	IfSM [A]	Tj [°C]	Vf (max) [V]	Conditions If [A]	Ir (max) Vr=VRRM [μA]	trr (max) [μs]				
— — 3S	D3	LN4SB60	600	4	111	150	150	0.95	2	10	5		—	—	
		LN6SB60	600	6	111	170	150	1.05	3	10	5		—	—	
— — 5S	D4	LN15XB60	600	15	100	200	150	1.10	7.5	10	5	—	—	—	
		LN15XB60H	600	15	106	290	150	1.05	7.5	10	5	—	—	—	
		LN25XB60	600	25	85	350	150	1.05	12.5	10	5	—	—	—	


 : UL recognized (UL File No. E142422)

## High Speed Bridge Diodes (SBD)

THD (Through Hole Device)															
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	UL	Automotive	Remarks
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	If (AV) [A]	Conditions Tc [°C]	IfSM [A]	Tj [°C]	Vf (max) [V]	Conditions If [A]	Ir (max) Vr=VRRM [μA]					
— — 3S	D3	D4SBS4	40	4	116	60	150	0.55	2	2mA	—	—	—	S series	
		D4SBS6	60	4	114	60	150	0.62	2	2mA	—	—	—	S series	
		D4SBN20	200	4	103	60	150	0.90	2	1.5	—	—	—	N series	
		D10SBS4	40	10	67	100	150	0.55	5	3.5mA	—	—	—	S series	
		D15XS6	60	15	59	150	150	0.63	7.5	6.0mA	—	—	—	S series	
— — 5S	D4	D6SBN20	200	6	110	120	150	0.90	3	2	—	—	—	N series	
		D15XBN20	200	15	106	200	150	0.90	7.5	5	—	—	—	N series	
		D20XS6	60	20	100	200	150	0.63	10	8.0mA	—	—	—	S series	
		D30XBN20	200	30	91	350	150	0.90	15	10	—	—	—	N series	

## High Speed Bridge Diodes (FRD)

THD (Through Hole Device)															
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	UL	Automotive	Remarks
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	If (AV) [A]	Conditions Tc [°C]	IfSM [A]	Tj [°C]	Vf (max) [V]	Conditions If [A]	Ir (max) Vr=VRRM [μA]					
— — 3S	D3	D4SBL20U	200	4	108	80	150	0.98	2	10	—	—	—		
		D30JCB100K	1000	30	90	450	150	1.90	15	10	—		○	K series	

 : UL recognized (UL File No. E142422)







# SCHOTTKY BARRIER DIODES

Schottky Barrier Diodes are diodes using a barrier at the junction of a metal and the semiconductor.

These are very suitable rectification devices featuring high speed and a low VF diode.

Series	Feature
S	Evenly balanced VF and IR
M	Evenly balanced Low VF and IR
N	High Voltage
H	Ultra Low VF
J	Low IR
SL	Ultra Low IR, Tj=175°C guaranteed
Y	Evenly balanced VF and Low IR
W	SiCSBD,Ultra High Recovery Speed,Low Noise

## Single

Package	JEDEC Code JEITA Code House Name	Fig.	IF(AV) [A]	VRRM[V]							Remarks		
				30	40	45	60	80	100	120		150	
	DO-219AB similar SC-109 G1F	B1-1	1	DG1M3 DG1H3	DG1S4		DG1S6		DG1J10A				
			1.4							DG1N15A			
			1.5	DG1M3A DG1H3A			DG1S6A						
	DO-219AA similar M1F	B2	1.2				M1FS6						
			1.33		M1FS4								
			1.5		M1FJ4								
			1.7	M1FH3									
	DO-214AC 1F	B3-1	3	M1FM3					D1FJ10				
			1.1		D1FS4		D1FS6						
			1.5		D1FS4A								
			2		D1FT4 D1FJ4		D1FT6	D1FJ8	D1FT10				
			2.5				D1FS6A						
	SC-110B CE	B5-1	3		D3CE4S	★ D3CE4R5ST	★ D3CE6S		★ D3CE10ST	★ D3CE12ST	D3CE15ST		
			5		D5CE4S	★ D5CE4R5ST	★ D5CE6S		★ D5CE10ST	★ D5CE12ST	★ D5CE15ST		
	DO-214AA similar M2F	B6	2						★ M2FS10ST		★ M2FS15ST		
			3						★ M3FS10ST		★ M3FS15ST		
			5						★ M5FS10ST		★ M5FS15ST		
			6	M2FH3 M2FM3									
	2F	B9-1	1.5				D2FS6						
			1.6		D2FS4								
			2.6		D3FS4A								
			3			D3FS6		D3FJ10					

★ : New product ★ : Under development









## Single

Surface Mount		Package	Fig.	Type No.	Absolute Maximum Ratings				Electrical Characteristics				Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code	JEITA Code				VRRM	IF(AV)	Conditions Tc	IFSM	Tj	VF(max)	Conditions IF	IR(max) Vr=VRRM				
House Name		[V]	[A]	[°C]	[A]	[°C]	[V]	[A]	[mA]	[pF]						
DO-219AB similar SC-109 G1F	B1-1	DG1M3	30	1	27 *1	20	150	0.46	0.7	0.05	36	-	○	○	M series	
		DG1H3	30	1	113 *2	20	125	0.36	0.7	1	37	-	○	○	H series	
		DG1S4	40	1	36 *1	30	150	0.55	0.7	0.8	37	-	○	○	S series	
		DG1S6	60	1	128 *2	30	150	0.58	0.7	1	32	-	○	○	S series	
		DG1J10A	100	1	125 *2	30	150	0.82	1	0.1	43	-	-	○	J series	
		DG1N15A	150	1.4	65 *1	30	150	0.88	1.4	0.05	32	-	○	○	N series	
		DG1M3A	30	1.5	37 *1	30	150	0.46	1.5	0.05	70	-	○	○	M series	
		DG1H3A	30	1.5	107 *2	30	125	0.36	1.5	1	70	-	-	○	○	H series
		DG1S6A	60	1.5	122 *2	40	150	0.53	1	0.05	43	-	○	○	S series	
DO-219AA similar M1F	B2	M1FS6	60	1.2	25 *1	40	150	0.58	1.1	1	53	-	○	○	S series	
		M1FS4	40	1.33	25 *1	30	150	0.55	1.1	0.8	50	-	○	○	S series	
		M1FJ4	40	1.5	31 *1	30	150	0.63	1.5	0.05	65	-	○	○	J series	
		M1FH3	30	1.7	25 *1	30	-55 to 125	0.36	1.5	1	80	-	-	-	H series	
DO-214AC 1F	B3-1	M1FM3	30	3	100	30	150	0.46	1.5	0.05	80	-	○	○	M series	
		D1FJ10	100	1	52 *1	50	150	0.72	1	0.2	63	-	○	○	J series	
		D1FS4	40	1.1	51 *1	30	150	0.55	1.1	1	65	-	○	○	S series	
		D1FS6	60	1.1	38 *1	40	150	0.58	1.1	1	50	-	○	○	S series	
		D1FS4A	40	1.5	28 *1	60	150	0.48	1.5	2	95	-	○	○	S series	
		D1FT4	40	2	143 *2	60	175	0.74	2	5μA	63	-	○	○	SL series	
		D1FJ4	40	2	117 *2	50	150	0.61	2	0.2	96	-	○	○	J series	
		D1FT6	60	2	141 *2	60	175	0.78	2	5μA	53	-	○	○	SL series	
		D1FJ8	80	2	110	30	150	0.74	1.5	0.2	40	-	-	○	Y series	
		D1FT10	100	2	136 *2	50	175	0.86	2	5μA	40	-	○	○	SL series	
		D1FS6A	60	2.5	103 *2	60	150	0.57	2.5	0.2	80	-	○	○	S series	
		D1FH3	30	3	95	60	125	0.36	3	2	130	-	-	■	H series	
		D1FT4A	40	3	127 *2	90	175	0.74	3	8μA	93	-	○	○	SL series	
		D1FT6A	60	3	125 *2	90	175	0.78	3	8μA	78	-	○	○	SL series	
		D1FJ8A	80	3	100	30	150	0.74	3	0.4	70	-	-	○	Y series	
		D1FT10A	100	3	116 *2	60	175	0.86	3	8μA	60	-	○	○	SL series	
		D1FT15A	150	3	116 *2	60	175	0.88	3	8μA	52	-	○	○	SL series	
D1FM3	30	5	83	90	150	0.46	3	0.1	130	-	○	○	M series			
SC-110B CE	B5-1	D3CE4S	40	3	106 *2	80	150	0.52	3	0.3	97	-	○	○	S series	
		★ D3CE4R5ST	45	3	133 *2	90	-55 to 175	0.74	3	8μA	98	-	TBD	○	SL series	
		D3CE6S	60	3	112 *2	100	150	0.58	3	0.3	110	-	○	○	S series	
		★ D3CE6ST	60	3	131 *2	90	-55 to 175	0.78	3	8μA	82	-	TBD	○	SL series	
		★ D3CE10ST	100	3	124 *2	80	-55 to 175	0.86	3	8μA	60	-	TBD	○	SL series	
		★ D3CE12ST	120	3	124 *2	80	-55 to 175	0.87	3	8μA	56	-	TBD	○	SL series	
		D3CE15ST	150	3	136 *2	80	175	0.88	3	8μA	52	-	○	○	SL series	
		D5CE4S	40	5	94 *2	120	-55 to 150	0.52	5	0.5	157	-	-	○	S series	
		★ D5CE4R5ST	45	5	126 *2	100	-55 to 175	0.74	5	15μA	189	-	TBD	○	SL series	
		★ D5CE6ST	60	5	120 *2	100	-55 to 175	0.78	5	15μA	149	-	TBD	○	SL series	
		★ D5CE10ST	100	5	112 *2	90	-55 to 175	0.86	5	15μA	106	-	TBD	○	SL series	
		★ D5CE12ST	120	5	111 *2	90	-55 to 175	0.87	5	15μA	102	-	TBD	○	SL series	
		★ D5CE15ST	150	5	111 *2	90	-55 to 175	0.88	5	15μA	92	-	TBD	○	SL series	
DO-214AA similar M2F	B6	M2FH3	30	6	70	110	125	0.36	6	4	240	-	-	-	H series	
		M2FM3	30	6	99	120	150	0.46	6	0.2	240	-	○	○	M series	
		★ M2FS10ST	100	2	TBD	TBD	-55 to 175	0.86	2	5μA	TBD	-	TBD	○	SL series	
		★ M2FS15ST	150	2	TBD	TBD	-55 to 175	0.88	2	5μA	TBD	-	TBD	○	SL series	
		★ M3FS10ST	100	3	TBD	TBD	-55 to 175	0.86	3	8μA	TBD	-	TBD	○	SL series	
		★ M3FS15ST	150	3	TBD	TBD	-55 to 175	0.88	3	8μA	TBD	-	TBD	○	SL series	
		★ M5FS10ST	100	5	TBD	TBD	-55 to 175	0.86	5	15μA	TBD	-	TBD	○	SL series	
★ M5FS15ST	150	5	TBD	TBD	-55 to 175	0.88	5	15μA	TBD	-	TBD	○	SL series			
2F	B9-1	D2FS6	60	1.5	31 *1	60	150	0.58	2	2	120	-	-	○	S series	
		D2FS4	40	1.6	34 *1	60	150	0.55	1.6	2.5	150	-	-	○	S series	
		D3FS4A	40	2.6	34 *1	150	150	0.45	2.6	5	340	-	○	○	S series	
		D3FS6	60	3	87 *2	80	150	0.58	3	2.5	130	-	-	○	S series	
		D3FJ10	100	3	92 *2	100	150	0.74	3	0.4	143	-	-	○	J series	





★ : New product ★ : Under development \*1 : Ta \*2 : Tl ■ : Please contact us.

# SCHOTTKY BARRIER DIODES

## Single

Surface Mount												
Package	JEDEC Code JEITA Code House Name	Fig.	IF(AV) [A]	VRRM[V]							Remarks	
				30	40	45	60	100	150	200		650
 9.5 × 6.6 × 2.65(mm)	— SC-63 E-pack	G1-2	3		DE3S4M		DE3S6M					
			5		DE5S4M		DE5S6M					
		G1-4	10	DE10S3L								
 6.5 × 4.5 × 1.1(mm)	TO-277A similar — FY	G4-1	5		D5FY4R5ST D5FY4R5SY	D5FY6ST D5FY6SY	D5FY10ST D5FY10SY	D5FY15ST	D5FY20SN			
			10		D10FY4R5ST D10FY4R5SY	D10FY6ST D10FY6SY	D10FY10ST D10FY10SY	D10FY15ST				
			15		D15FY4R5ST D15FY4R5SY	D15FY6ST D15FY6SY	D15FY10ST D15FY10SY	D15FY15ST				
 9.6 × 6.6 × 2.3(mm)	TO-252AA similar — FR	G5	15		D15FR4ST							
			20		D20FR4ST	D20FR4R5S						
 10.0 × 6.6 × 2.3(mm)	TO-252AA — FB	G2-5	10								★ WS10FB65AK	
			20									

★ : Under development

Axial						
Package	JEDEC Code JEITA Code House Name	Fig.	IF(AV) [A]	VRRM[V]		Remarks
				40	60	
 3.0 × φ 2.6(mm)	— — AX057	A1	1	D1NS4	D1NS6	
 5.0 × φ 4.0(mm)	— — AX078	A4-1	2	D2S4M	D2S6M	
 7.0 × φ 4.4(mm)	— — AX14	A7	3	D3S4M	D3S6M	

## Single

Surface Mount																
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	IF (AV) [A]	Conditions Tc [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	Ir (max) Vr=VRRM [mA]	Ct (typ) [pF]					
— SC-63 E-pack	G1-2	DE3S4M	40	3	121	70	150	0.55	3	2.5	150	—	—	—	S series	
		DE3S6M	60	3	117	80	150	0.58	3	2.5	130	—	—	—	S series	
		DE5S4M	40	5	101	80	150	0.55	5	3.5	180	—	—	—	S series	
		DE5S6M	60	5	96	90	150	0.58	5	4.5	200	—	—	—	S series	
— SC-63 E-pack	G1-4	DE10S3L	30	10	124	250	150	0.45	8	10	640	—	—	—	S series	
	TO-277A similar — FY	G4-1	D5FY4R5ST	45	5	165 *2	240	-55 to 175	0.74	5	15μA	187	○	○	○	SL series
D5FY4R5SY			45	5	138 *2	220	-55 to 150	0.59	5	0.2	155	○	○	○	Y series	
D5FY6ST			60	5	164 *2	210	-55 to 175	0.78	5	15μA	148	○	○	○	SL series	
D5FY6SY			60	5	138 *2	210	-55 to 150	0.67	5	0.2	170	○	○	○	Y series	
D5FY10ST			100	5	162 *2	210	-55 to 175	0.86	5	15μA	104	○	○	○	SL series	
D5FY10SY			100	5	132 *2	130	-55 to 150	0.8	5	0.2	141	○	○	○	Y series	
D5FY15ST			150	5	162 *2	210	-55 to 175	0.88	5	15μA	92	○	○	○	SL series	
D5FY20SN			200	5	163 *2	210	-55 to 175	0.87	5	5μA	111	○	○	○	SL series	
D10FY4R5ST			45	10	155 *2	250	-55 to 175	0.74	10	30μA	330	○	○	○	SL series	
D10FY4R5SY			45	10	126 *2	290	-55 to 150	0.59	10	0.4	302	○	○	○	Y series	
D10FY6ST			60	10	154 *2	230	-55 to 175	0.78	10	30μA	263	○	○	○	SL series	
D10FY6SY			60	10	127 *2	250	-55 to 150	0.67	10	0.4	262	○	○	○	Y series	
D10FY10ST			100	10	152 *2	230	-55 to 175	0.86	10	30μA	185	○	○	○	SL series	
D10FY10SY			100	10	118 *2	260	-55 to 150	0.8	10	0.4	253	○	○	○	Y series	
D10FY15ST			150	10	149 *2	230	-55 to 175	0.88	10	30μA	159	○	○	○	SL series	
D15FY4R5ST			45	15	145 *2	270	-55 to 175	0.74	15	40μA	398	○	○	○	SL series	
D15FY4R5SY			45	15	116 *2	310	-55 to 150	0.59	15	0.5	410	○	○	○	Y series	
D15FY6ST			60	15	143 *2	250	-55 to 175	0.78	15	40μA	345	○	○	○	SL series	
D15FY6SY			60	15	117 *2	280	-55 to 150	0.67	15	0.5	345	○	○	○	Y series	
D15FY10ST			100	15	141 *2	250	-55 to 175	0.86	15	40μA	242	○	○	○	SL series	
D15FY10SY	100	15	114 *2	280	-55 to 150	0.83	15	0.5	297	○	○	○	Y series			
D15FY15ST	150	15	138 *2	230	-55 to 175	0.88	15	40μA	209	○	○	○	SL series			
TO-252AA similar — FR	G5	D15FR4ST	40	15	152	250	-55 to 175	0.74	15	40μA	398	—	○	■	SL series	
		D20FR4ST	40	20	149	400	-55 to 175	0.74	20	60μA	600	—	○	■	SL series	
		D20FR4R5S	45	20	118	300	-55 to 150	0.55	20	2.8	625	—	○	○	S series	
TO-252AA — FB	G2-5	★ WS10FB65AK	650	10	TBD	TBD	-55 to 175	1.49 *1	10	50μA	5 *3	○	TBD	○	W series	
		★ WS20FB65AK	650	20	TBD	TBD	-55 to 175	1.47 *1	20	0.4	10 *3	○	TBD	○	W series	



★ : Under development \*1 : Vf(typ) \*2 : Tl \*3 : Qrr(typ)[nC] ■ : Please contact us.

Axial																
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	IF (AV) [A]	Conditions Ta [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	Ir (max) Vr=VRRM [mA]	Ct (typ) [pF]					
— — AX057	A1	D1NS4	40	1	59	30	150	0.55	1	0.8	50	—	—	—	S series	
		D1NS6	60	1	46	30	150	0.58	1	1	53	—	—	—	S series	
— — AX078	A4-1	D2S4M	40	2	122 *1	60	150	0.55	2	2	95	—	—	—	S series	
		D2S6M	60	2	119 *1	60	150	0.58	2	2	90	—	—	—	S series	
— — AX14	A7	D3S4M	40	3	63	80	150	0.55	3	3.5	150	—	—	—	S series	
		D3S6M	60	3	133 *1	80	150	0.58	3	2.5	130	—	—	—	S series	



\*1 : Tl

# SCHOTTKY BARRIER DIODES

## Single






Two Terminal Type										
Package	JEDEC Code JEITA Code House Name	Fig.	If(AV) [A]	VRRM[V]					Remarks	
				40	60	90	150	650		1200
 28.5 × 10.0 × 4.5(mm)	SC-91 FTO-220AG	J3	10						★ WS10SF65AK	★ WS10SF120AK
			20						★ WS20SF65AK	
 28.5 × 10.0 × 4.5(mm)	SC-91 FTO-220G	J4	5	SG5S4M	SG5S6M	SG5S9M				

★ : Under development

Three Terminal Type									
Package	JEDEC Code JEITA Code House Name	Fig.	If(AV) [A]	VRRM[V]					Remarks
				40	60	90	150	650	
 41.0 × 16.0 × 5.0(mm)	TO-247AD MTO-3PV	K7-2	40					S40T15V	
			90					S90T15V	
 41.02 × 15.94 × 5.02(mm)	TO-247AD GC	K8-3	20						★ WS20GC65AK

★ : Under development

## Center Tap, Common Cathode

Surface Mount													
Package	JEDEC Code JEITA Code House Name	Fig.	If(AV) [A]	VRRM[V]								Remarks	
				30	40	45	60	90	100	120	150		650
 9.5 × 6.6 × 2.65(mm)	SC-63 E-pack	G1-1	5	DE5SC3ML	DE5SC4M		DE5SC6M						
			10	DE10SC3L	DE10SC4								
 9.5 × 6.6 × 2.65(mm)	TO-252AB similar SC-63 FE	G3-1	5	★ D5FEC3SH									
			6		D6FEC4ST			D6FEC10ST	D6FEC12ST	D6FEC15ST			
 13.2 × 10.2 × 4.7(mm)	SC-83 similar STO-220	H1-1	10		DF10SC4M		DF10SC6	DF10SC9				DF10NC15	
			15		DF15SC4M				DF15JC10				DF15NC15
			20		DF20SC4M			DF20SC9M	DF20JC10				DF20NC15
			25				DF25SC6M						
			30	DF30SC3ML	DF30JC4	DF30SC4M		DF30JC6		DF30JC10			DF30NC15
 13.2 × 10.2 × 4.6(mm)	SC-83 similar FD	H2-2	10							D10FDC10ST			
			20							D20FDC10ST		D20FDC15ST	
			30		D30FDC4S					D30FDC10ST		D30FDC15ST	
			40							D40FDC10ST		D40FDC15ST	
 10.0 × 6.6 × 2.3(mm)	TO-252AA FB	G2-4	6			★ D6FBC4R5ST	★ D6FBC6ST		★ D6FBC10ST	★ D6FBC12ST	★ D6FBC15ST		
			20										★ WS20FBC65AK

★ : Under development

## Single

Two Terminal Type																
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	If (AV) [A]	Conditions Tc [°C]	IfSM [A]	Tj [°C]	Vf (max) [V]	Conditions If [A]	Ir (max) Vr=VrM [mA]	Ct (typ) [pF]					
SC-91 FTO-220AG	J3	★ WS10SF65AK	650	10	TBD	TBD	-55 to 175	1.49 *1	10	50μA	5 *2	-	TBD	○	W series	
		★ WS10SF120AK	1200	10	TBD	TBD	-55 to 175	1.48 *1	10	0.2	10 *2	-	TBD	○	W series	
		★ WS20SF65AK	650	20	TBD	TBD	-55 to 175	1.47 *1	20	0.1	10 *2	-	TBD	○	W series	
SC-91 FTO-220G	J4	SG5S4M	40	5	131	150	150	0.52	5	0.5	157	-	-	-	S series	
		SG5S6M	60	5	130	120	150	0.56	5	0.5	165	-	-	-	S series	
		SG5S9M	90	5	124	90	150	0.75	5	0.5	140	-	-	-	S series	

★ : Under development \*1 : Vf(typ) \*2 : Qrr(typ)[nC]

Three Terminal Type																
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	If (AV) [A]	Conditions Tc [°C]	IfSM [A]	Tj [°C]	Vf (max) [V]	Conditions If [A]	Ir (max) Vr=VrM [mA]	Ct (typ) [pF]					
TO-247AD MTO-3PV	K7-2	S40T15V	150	40	131	700	150	0.92	40	0.12	595	-	-	○	N series	
		S90T15V	150	90	122	1400	150	0.95	90	0.35	1690	-	-	○	N series	
TO-247AD GC	K8-3	★ WS20GC65AK	650	20	TBD	TBD	-55 to 175	1.47 *1	20	0.4	10 *2	○	TBD	○	W series	

★ : Under development \*1 : Vf(typ) \*2 : Qrr(typ)[nC]

## Center Tap, Common Cathode






Surface Mount																	
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series	
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	If (AV) [A]	Conditions Tc [°C]	IfSM [A]	Tj [°C]	Vf (max) [V]	Conditions If [A]	Ir (max) Vr=VrM [mA]	Ct (typ) [pF]						
SC-63 E-pack	G1-1	DE5SC3ML	30	5	110	90	150	0.45	2.5	3.5	190	-	-	■	S series		
		DE5SC4M	40	5	101	80	150	0.55	2.5	3.5	150	-	-	■	S series		
		DE5SC6M	60	5	92	80	150	0.58	2.5	2.5	130	-	-	■	S series		
		DE10SC3L	30	10	124	100	150	0.45	4	5	290	-	-	■	S series		
		DE10SC4	40	10	132	100	150	0.55	5	3.5	210	-	-	■	S series		
TO-252AB similar SC-63 FE	G3-1	★ D5FEC3SH	30	5	110	100	-55 to 125	0.4	2.5	1.3	91	-	-	-	H series		
		D6FEC4ST	40	6	158	90	175	0.74	3	8μA	93	-	○	○	SL series		
		D6FEC10ST	100	6	154	100	175	0.86	3	8μA	60	-	○	○	SL series		
		D6FEC12ST	120	6	154	100	175	0.87	3	8μA	60	-	○	○	SL series		
		D6FEC15ST	150	6	154	100	175	0.88	3	8μA	52	-	○	○	SL series		
		DF10SC4M	40	10	125	100	150	0.55	5	3.5	180	-	-	-	S series		
		DF10SC6	60	10	132	150	150	0.58	5	4.5	260	-	-	-	S series		
		DF10SC9	90	10	131	150	150	0.75	5	3	185	-	-	-	S series		
		DF10NC15	150	10	123	100	150	0.88	5	0.2	110	-	-	-	N series		
		DF15SC4M	40	15	129	150	150	0.55	7.5	5	340	-	-	-	S series		
		DF15JC10	100	15	126	150	150	0.86	7.5	0.6	200	-	-	-	J series		
		DF15NC15	150	15	126	150	150	0.88	7.5	0.3	155	-	-	-	N series		
		DF20SC4M	40	20	122	230	150	0.55	10	7.5	390	-	-	-	S series		
		DF20SC9M	90	20	111	200	150	0.75	10	10	370	-	-	-	S series		
		DF20JC10	100	20	121	200	150	0.86	10	0.7	260	-	-	-	J series		
SC-83 similar STO-220	H1-1	DF20NC15	150	20	121	200	150	0.88	10	0.4	200	-	-	-	N series		
		DF25SC6M	60	25	115	300	150	0.58	12.5	10	490	-	-	-	S series		
		DF30SC3ML	30	30	119	350	150	0.48	15	10	820	-	-	-	S series		
		DF30JC4	40	30	115	250	150	0.61	15	0.7	560	-	-	-	J series		
		DF30SC4M	40	30	112	360	150	0.55	15	10	590	-	-	-	S series		
		DF30JC6	60	30	108	250	150	0.69	15	0.7	490	-	-	-	J series		
		DF30JC10	100	30	116	300	150	0.86	15	1	390	-	-	-	J series		
		DF30NC15	150	30	115	300	150	0.88	15	0.5	300	-	-	-	N series		
		DF40SC3L	30	40	112	400	150	0.45	15	17	1200	-	-	-	S series		
		DF40SC4	40	40	106	350	150	0.55	20	14	860	-	-	-	S series		
		SC-83 similar FD	H2-2	D10FDC10ST	100	10	158	150	175	0.86	5	15μA	104	-	○	○	SL series
				D20FDC10ST	100	20	119	250	150	0.86	10	30μA	185	-	○	○	N series
				D20FDC15ST	150	20	118	250	150	0.88	10	30μA	159	-	-	○	N series
				D30FDC4S	40	30	114	300	150	0.55	15	1.5	415	-	○	○	S series
				D30FDC10ST	100	30	108	300	150	0.86	15	40μA	242	-	-	○	N series
D30FDC15ST	150			30	107	300	150	0.88	15	40μA	209	-	-	○	N series		
D40FDC10ST	100			40	105	400	150	0.86	20	60μA	360	-	-	■	N series		
D40FDC15ST	150			40	103	400	150	0.88	20	60μA	315	-	-	■	N series		
TO-252AA FB	G2-4			★ WS20FBC65AK	650	20	TBD	TBD	-55 to 175	1.49 *1	10	50μA	5 *2	○	TBD	○	W series
				★ D6FBC4R5ST	45	6	TBD	TBD	-55 to 175	0.74	3	8μA	TBD	○	TBD	○	SL series
				★ D6FBC6ST	60	6	TBD	TBD	-55 to 175	0.78	3	8μA	TBD	○	TBD	○	SL series
				★ D6FBC10ST	100	6	TBD	TBD	-55 to 175	0.86	3	8μA	TBD	○	TBD	○	SL series
				★ D6FBC12ST	120	6	TBD	TBD	-55 to 175	0.87	3	8μA	TBD	○	TBD	○	SL series
				★ D6FBC15ST	150	6	TBD	TBD	-55 to 175	0.88	3	8μA	TBD	○	TBD	○	SL series

★ : Under development \*1 : Vf(typ) \*2 : Qrr(typ)[nC] ■ : Please contact us.



# SCHOTTKY BARRIER DIODES

## Center Tap, Common Cathode

Three Terminal Type														
Package	JEDEC Code JEITA Code House Name	Fig.	IF (AV) [A]	VRRM[V]										Remarks
				15	30	40	60	90	100	120	150	650	1200	
 28.5 × 10.0 × 4.5(mm)	SC-91 FTO-220AG	J8-1	20										★ WS20SFC65AK	
 28.5 × 10.0 × 4.5(mm)	SC-91 FTO-220G	J9	8 10 15 20 30 40		SG10SC3LM	SG10SC4M	SG10SC6M	SG10SC9M				SG10TC15M		① ② ③
 41.0 × 16.0 × 5.0(mm)	TO-247AD MTO-3PT	K5-2	20 30 40 60			S30SC4MT	S30SC6MT	S20SC9MT				S30TC15T		
 41.0 × 16.0 × 5.0(mm)	TO-247AD MTO-3PV	K7-1	20 60										■ S20SC65WV	① ② ④ ③
 41.02 × 15.94 × 5.02(mm)	TO-247AD GC	K8-2	20 40										★ WS20GCC65AK ★ WS20GCC120AK ★ WS40GCC65AK	

■ : New product ★ : Under development

## Center Tap, Common Cathode





Three Terminal Type																
JEDEC Code JEITA Code House Name	Package	Fig.	Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	Based on AEC-Q101	Automotive	Series
				VRRM [V]	IF (AV) [A]	Conditions Tc [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	Ir (max) Vr=VRRM [mA]	Ct (typ) [pF]				
SC-91 FTO-220AG	J8-1		★ WS20SFC65AK	650	20	TBD	TBD	-55 to 175	1.49 *1	10	50μA	5 *2	—	TBD	○	W series
SC-91 FTO-220G	J9		SG8SC4M	40	8	155	80	175	0.56	4	0.3	100	—	—	—	S series
		SG10SC3LM	30	10	136	150	150	0.45	4	5	310	—	—	—	S series	
		SG10SC4M	40	10	150	150	175	0.52	5	0.5	157	—	—	—	S series	
		SG10SC6M	60	10	145	140	175	0.56	5	0.5	165	—	—	—	S series	
		SG10SC9M	90	10	139	150	175	0.75	5	0.5	140	—	—	—	S series	
		SG10TC15M	150	10	153	120	175	0.88	5	15μA	92	—	—	—	SL series	
		SG15SC4M	40	15	117	150	150	0.52	7.5	0.8	230	—	—	—	S series	
		SG15SC6M	60	15	113	180	150	0.61	7.5	0.6	185	—	—	—	S series	
		SG20SC3LM	30	20	124	250	150	0.45	8	9	570	—	—	—	S series	
		SG20SC4M	40	20	115	200	150	0.52	10	1.1	315	—	—	—	S series	
		SG20JC6M	60	20	106	200	150	0.69	10	0.1	250	—	—	—	J series	
		SG20SC6M	60	20	107	200	150	0.61	10	0.8	250	—	—	—	S series	
		SG20SC9M	90	20	112	200	150	0.75	10	1	245	—	—	—	S series	
		SG20TC10M	100	20	140	200	175	0.86	10	30μA	185	—	—	—	SL series	
		SG20TC12M	120	20	137	200	175	0.87	10	30μA	175	—	—	—	SL series	
		SG20TC15M	150	20	136	200	175	0.88	10	30μA	159	—	—	—	SL series	
		SG30SC3LM	30	30	117	350	150	0.45	12.5	15	960	—	—	—	M series	
		SG30SC4M	40	30	101	300	150	0.55	15	1.5	415	—	—	—	S series	
		SG30JC6M	60	30	90	250	150	0.69	15	0.15	325	—	—	—	J series	
		SG30SC6M	60	30	100	300	150	0.61	15	1.2	385	—	—	—	S series	
		SG30TC10M	100	30	126	300	175	0.86	15	40μA	242	—	—	—	SL series	
		SG30TC12M	120	30	122	300	175	0.87	15	40μA	228	—	—	—	SL series	
		SG30TC15M	150	30	122	300	175	0.88	15	40μA	209	—	—	—	SL series	
		SG40TC10M	100	40	116	350	175	0.86	20	60μA	362	—	—	—	SL series	
		SG40TC12M	120	40	112	350	175	0.87	20	60μA	336	—	—	—	SL series	
		TO-247AD MTO-3PT	K5-2		S20SC9MT	90	20	136	200	150	0.75	10	1	245	—	—
S30SC4MT	40			30	132	300	150	0.55	15	1.5	410	—	—	—	S series	
S30SC6MT	60			30	129	300	150	0.61	15	1.2	385	—	—	—	S series	
S30TC15T	150			30	128	300	150	0.88	15	40μA	209	—	—	—	N series	
S40HC1R5T	15			40	111	450	125	0.41	20	10	960	—	—	—	H series	
S60HC1R5T	15			60	110	600	125	0.41	30	15	1400	—	—	—	H series	
S60HC3T	30			60	112	650	125	0.40	30	20	1100	—	—	—	H series	
S60SC3LT	30			60	138	650	150	0.48	30	25	1600	—	—	—	S series	
S60SC4MT	40			60	127	500	150	0.55	30	3	790	—	—	—	S series	
S60SC6MT	60			60	121	470	150	0.67	30	2	640	—	—	—	S series	
TO-247AD MTO-3PV	K7-1		S60JC10V	100	60	118	500	150	0.95	30	0.2	695	—	—	○	J series
			■ S20SC65WV	650	20	125	55	-55 to 175	1.9	10	0.1	170	—	—	—	W series
TO-247AD GC	K8-2		★ WS20GCC65AK	650	20	TBD	TBD	-55 to 175	1.49 *1	10	50μA	5 *2	○	TBD	○	W series
			★ WS20GCC120AK	1200	20	TBD	TBD	-55 to 175	1.48 *1	10	0.2	10 *2	○	TBD	○	W series
			★ WS40GCC65AK	650	40	TBD	TBD	-55 to 175	1.47 *1	20	0.4	10 *2	○	TBD	○	W series

■ : New product ★ : Under development \*1 : Vf(typ) \*2 : Qrr(typ)[nC]

SCHOTTKY BARRIER DIODES

# SCHOTTKY BARRIER DIODES

## Diode Module

Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]		Remarks	
				40	60		
 43.0 × 27.0 × 21.0(mm)	-	F1	120	D120SC4M	D120SC6M		
			240	D240SC4M	D240SC6M		
F3-1			180	D180SC4M	D180SC6M		
			360	D360SC4M	D360SC6M		
 43.0 × 27.0 × 21.0(mm)		Module					

## Diode Module

Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [mA]	C <sub>t</sub> (typ) [pF]					
-	F1	D120SC4M	40	120	90	800	125	0.58	60	40	2.1	-	-	-	S series	
		D120SC6M	60	120	85	800	125	0.67	60	40	2.2	-	-	-	S series	
		D240SC4M	40	240	77	1600	125	0.6	120	80	4.2	-	-	-	S series	
		D240SC6M	60	240	71	1600	125	0.67	120	80	4.4	-	-	-	S series	
	F3-1	D180SC4M	40	180	83	800	125	0.58	60	40	2.1	-	-	-	S series	
		D180SC6M	60	180	78	800	125	0.67	60	40	2.2	-	-	-	S series	
		D360SC4M	40	360	64	1600	125	0.6	120	80	4.2	-	-	-	S series	
		D360SC6M	60	360	58	1600	125	0.67	120	80	4.4	-	-	-	S series	












# FAST RECOVERY DIODES

Fast Recovery Diodes are high speed type PN junction rectifying devices.

These diodes for the switching of power supply are suitable for use in household appliances, OA apparatuses, and FA apparatuses.

Series	Feature
K	Low Vf
ML	Low Vf, Low trr, Soft Recovery
US	Ultra Fast, Soft Recovery
A	Ultra Fast, Low Vf
Z	Ultra Fast, Soft Recovery, Low Noise

## Single

Surface Mount												
Package	JEDEC Code JEITA Code House Name	Fig.	IF(AV) [A]	VRRM[V]						Remarks		
				200	400	600	700	800	1000		1200	
	DO-219AA similar - M1F	B2	1			M1FK60						
			1.1	M1FL20U								
			1.5		M1FL40U							
	DO-214AC - 1F	B3-1	0.8			D1FK60	D1FK70					
			1					D1FK100	D1FK120P D1FK120			
			1.1	D1FL20U								
	DO-214AC - CF	2								D2CF60K		① ←   → ②
			1.5		D1FL40U							
	SC-110B CE	B5-1	2								N D2CE80K	
			3	D3CE20LUS		D3CE60K						
	DO-214AA similar - M2F	B6	1.5	M2FL20U								
			3	M3FL20U		★ M3FK60						
	-	B9-1	1.5	D2FL20U		D2FK60						
			2		D2FL40U							
			2.1			D3FK60						
	SC-63 E-pack	G1-5	2.2								D3FK120	① ④   ② ③ N.C.
			3	DE3L20UA								
	TO-277A similar - FY	G4-1	5			D5FY60K						①   ② ③
			8			DF8L60US						
	SC-83 similar STO-220	H1-2	10			DF10L60						① ② ④   ③
			20			DF20L60						
						DF20L60U						
	TO-252AA similar - FR	G5	10			N D10FR60K						①   ② ④ ③
			15			D10FR60LA						
	SC-83 similar FD	H2-1	8			D8FD60LUS						
			20			D20FD60LU						
			30			D30FD60K						

N : New product ★ : Under development






## Single







Surface Mount																
JEDEC Code JEITA Code House Name	Fig.	Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series
			VRRM [V]	IF (AV) [A]	Conditions Tc [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	Ir (max) Vr=VRRM [μA]	trr (max) [ns]					
DO-219AA similar - M1F	B2	M1FK60	600	1	116 *1	15	150	1.5	1	10	75	-	○	○	K series	
		M1FL20U	200	1.1	25 *2	30	150	0.98	1.1	10	35	-	○	○	-	
		M1FL40U	400	1.5	139	30	175	1.2	1	10	25	-	■	○	-	
DO-214AC - 1F	B3-1	D1FK60	600	0.8	29 *2	20	150	1.3	0.8	10	75	-	○	○	K series	
		D1FK70	700	0.8	32 *2	25	150	1.3	0.8	10	400	-	○	○	-	
		D1FK100	1000	1	97 *1	20	150	2.1	1	10	75	-	○	○	K series	
		D1FK120P	1200	1	79 *1	18	-55 to 150	3.0	1	10	85	-	○	■	K series	
		D1FK120	1200	1	75 *1	20	150	3.0	1	10	120	-	-	■	K series	
		D1FL20U	200	1.1	25 *2	20	150	0.98	1.1	10	35	-	○	○	-	
DO-214AC - CF		D1FL40U	400	1.5	103 *1	30	150	1.2	1	10	25	-	○	○	-	
		D2CF60K	600	2	90 *1	35	-55 to 150	1.57	2	10	75	-	○	○	K series	
SC-110B CE	B5-1	N D2CE80K	800	2	89 *1	50	-55 to 150	2	2	10	150	-	○	○	K series	
		D3CE20LUS	200	3	105 *1	60	-55 to 150	0.98	3	10	25	-	○	○	-	
		D3CE60K	600	3	78 *1	50	150	1.45	3	10	80	-	○	○	K series	
DO-214AA similar - M2F	B6	M2FL20U	200	1.5	31 *2	50	150	0.92	1.5	10	35	-	-	○	-	
		M3FL20U	200	3	75 *1	75	150	0.95	3	10	35	-	○	○	-	
		★ M3FK60	600	3	TBD	TBD	-55 to 150	1.45	3	10	80	-	TBD	○	K series	
-	B9-1	D2FL20U	200	1.5	25 *2	50	150	0.98	1.5	10	35	-	○	○	-	
		D2FK60	600	1.5	101 *1	40	150	1.3	1.5	10	75	-	-	○	K series	
		D2FL40U	400	2	100 *1	95	-55 to 150	1.25	2	10	35	-	-	-	-	
		D3FK60	600	2.1	93 *1	120	150	1.2	2.1	10	75	-	-	○	K series	
SC-63 E-pack	G1-5	D3FK120	1200	2.2	91 *1	160	-55 to 150	2.1	3	10	80	-	-	-	K series	
		DE3L20UA	200	3	137	60	150	0.98	3	10	35	-	-	■	-	
SC-63 E-pack		DE5L60U	600	5	91	60	150	3.0	5	25	25	-	-	■	-	
		DE5L60A	600	5	119	60	150	2.0	5	10	50	-	-	■	-	
TO-277A similar - FY	G4-1	D5FY60K	600	5	130 *1	200	-55 to 150	1.25	5	10	95	○	-	■	K series	
SC-83 similar STO-220	H1-2	DF8L60US	600	8	66	60	150	3.6	8	50	25	-	-	-	US series	
		DF10L60	600	10	105	100	150	1.9	10	10	50	-	-	-	-	
		DF20L60	600	20	84	170	150	1.9	20	25	70	-	-	-	-	
TO-252AA similar - FR	G5	DF20L60U	600	20	93	160	150	3.0	20	25	35	-	-	-	-	
		D10FR60LA	600	10	110	140	-55 to 150	2.1	10	10	28	-	○	■	A series	
		N D10FR60K	600	10	114	130	-55 to 150	1.5	10	10	95	-	-	-	K series	
SC-83 similar FD	H2-1	D15FR60LA	600	15	95	220	-55 to 150	2.1	15	10	30	-	○	■	A series	
		D8FD60LUS	600	8	120	60	175	3.6	8	50	25	-	-	○	US series	
		D20FD60LU	600	20	93	160	150	3.0	20	25	35	-	-	○	-	
		D30FD60K	600	30	102	300	150	1.7	30	10	95	-	-	■	K series	

N : New product ★ : Under development \*1 : Tl \*2 : Ta ■ : Please contact us.





# FAST RECOVERY DIODES

## Single

Axial								
Package	JEDEC Code JEITA Code House Name	Fig.	IF(AV) [A]	VRRM[V]				Remarks
				200	400	600	1000	
	— — AX057	A1	0.8			D1NF60 D1NK60		
			1	D1NL20U	D1NL40U		D1NK100	
	— — AX078	A4-1	1.5	D2L20U				
			2		D2L40U			
	— — AX10	A5-1	1.5	S2L20U		S2L60		
			2		S2L40U		S2K100	
	— — AX14	A7	2.2			S3L60		
			3	S3L20U	S3L40U	S3K60		

Two Terminal Type								
Package	JEDEC Code JEITA Code House Name	Fig.	IF(AV) [A]	VRRM[V]				Remarks
				200	400	600	650	
	— — SC-91A FTO-220	J1	3			SF3L60U		
			5			SF5L60U		
			10			SF10L60U		
			20			SF20L60U		
	— — SC-91 FTO-220AG	J3	3		SF5L40UM	SF3K60M		
			5		SF5L40UM	SF5K60M		
			8			SF8K60USM SF8K60M		
			10			SF10K60M SF10L60MVM SF10L60MSM SF10L60AM	★ SF10L65ZVM ★ SF10L65ZSM	
			20			SF20K60M SF20L60MVM SF20L60MSM SF20L60AM	★ SF20L65ZVM ★ SF20L65ZSM	
	— — SC-91 FTO-220G	J4	5	SG5L20USM				
			10	SG10L20USM				
	— — TO-247AD — MTO-3PT	K2	20			S20K60T		
			30			S30K60T		

★ : Under development

Three Terminal Type							
Package	JEDEC Code JEITA Code House Name	Fig.	IF(AV) [A]	VRRM[V]			Remarks
				600	1000	1200	
	— — TO-247AD — MTO-3PV	K6	20		S20K100V		
			30	S30K60V	S30K100V		
		K7-2	60			■ S60L120V	

■ : New product

## Single

Axial															
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	IF (AV) [A]	Conditions Ta [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	Ir (max) Vr=VRRM [μA]	trr (max) [ns]				
— — AX057	A1	D1NF60	600	0.8	25	50	150	1.3	0.8	10	400	—	—	—	—
		D1NK60	600	0.8	26	35	150	1.3	0.8	10	75	—	—	—	K series
		D1NL20U	200	1	25	25	150	0.98	1	10	35	—	—	—	—
		D1NL40U	400	1	137 *1	50	150	1.25	1	10	25	—	—	—	—
— — AX078	A4-1	D2L20U	200	1.5	125 *1	40	150	0.98	1.5	10	35	—	—	—	—
		D2L40U	400	2	108 *1	80	150	1.25	2	10	35	—	—	—	—
— — AX10	A5-1	S2L20U	200	1.5	25	50	150	0.98	1.5	10	35	—	—	—	—
		S2L60	600	1.5	125 *1	50	150	1.5	1.5	10	50	—	—	—	—
		S2L40U	400	2	120 *1	100	150	1.25	2	10	35	—	—	—	—
— — AX14	A7	S2K100	1000	2	91 *1	65	150	2.1	2	10	75	—	—	—	K series
		S3L60	600	2.2	132 *1	60	150	1.5	2.2	10	50	—	—	—	—
		S3L20U	200	3	128 *1	60	150	0.98	2.1	10	35	—	—	—	—
		S3L40U	400	3	126 *1	150	150	1.25	3	10	35	—	—	—	—
		S3K60	600	3	123 *1	120	150	1.3	3	10	100	—	—	—	K series

\*1 : TL

Two Terminal Type															
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	IF (AV) [A]	Conditions Tc [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	Ir (max) Vr=VRRM [μA]	trr (max) [ns]				
— — SC-91A FTO-220	J1	SF3L60U	600	3	115	40	150	3.00	3	25	20	—	—	—	—
		SF5L60U	600	5	96	60	150	3.00	5	25	25	—	—	—	—
		SF10L60U	600	10	85	120	150	3.00	10	25	25	—	—	■	—
		SF20L60U	600	20	68	180	150	3.00	20	25	35	—	—	■	—
— — SC-91 FTO-220AG	J3	SF3K60M	600	3	132	90	150	1.45	3	10	80	—	—	—	K series
		SF5L40UM	400	5	121	100	150	1.25	5	10	30	—	—	■	—
		SF5K60M	600	5	119	120	150	1.50	5	10	85	—	—	■	K series
		SF8K60USM	600	8	70	60	150	3.60	8	50	25	—	—	—	US series
		SF8K60M	600	8	108	150	150	1.50	8	10	90	—	—	■	K series
		SF10K60M	600	10	106	180	150	1.50	10	10	95	—	—	—	K series
		SF10L60MVM	600	10	119	200	150	1.10	10	10	115	—	—	■	ML series
		SF10L60MSM	600	10	110	160	150	1.37	10	10	60	—	—	■	ML series
		SF10L60AM	600	10	106	180	-55 to 150	2.10	10	10	28	—	—	—	A series
		★ SF10L65ZVM	650	10	130	150	-55 to 175	1.7	10	50	35	—	—	—	Z series
		★ SF10L65ZSM	650	10	121	100	-55 to 175	2.8	10	50	25	—	—	—	Z series
		SF20K60M	600	20	96	240	150	1.50	20	10	95	—	—	—	K series
		SF20L60MVM	600	20	106	250	150	1.10	20	10	130	—	—	■	ML series
		SF20L60MSM	600	20	96	220	150	1.37	20	10	70	—	—	■	ML series
		SF20L60AM	600	20	77	260	-55 to 150	2.10	20	10	35	—	—	—	A series
		★ SF20L65ZVM	650	20	115	190	-55 to 175	1.7	20	50	40	—	—	—	Z series
★ SF20L65ZSM	650	20	102	160	-55 to 175	2.8	20	50	30	—	—	—	Z series		
— — SC-91 FTO-220G	J4	SG5L20USM	200	5	125	90	150	0.96	5	10	25	—	—	—	—
		SG10L20USM	200	10	101	200	150	0.96	10	10	25	—	—	—	—
— — TO-247AD — MTO-3PT	K2	S20K60T	600	20	121	300	150	1.50	20	10	95	—	—	—	K series
		S30K60T	600	30	123	450	150	1.50	30	10	100	—	—	—	K series





★ : Under development ■ : Please contact us.








Three Terminal Type															
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		VRRM [V]	IF (AV) [A]	Conditions Tc [°C]	IFSM [A]	Tj [°C]	Vf (max) [V]	Conditions IF [A]	Ir (max) Vr=VRRM [μA]	trr (max) [ns]				
TO-247AD — MTO-3PV	K6	S20K100V	1000	20	127	550	150	2.10	20	10	120	—	—	○	K series
		S30K60V	600	30	108	450	150	1.50	30	10	100	—	—	○	K series
		S30K100V	1000	30	116	600	150	2.10	30	10	120	—	—	○	K series
	K7-2	■ S60L120V	1200	60	63	450	-55 to 150	2.7	60	100	300	—	—	—	—

■ : New product

# FAST RECOVERY DIODES

## Center Tap, Common Cathode

Surface Mount								
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]				Remarks
				200	300	400	600	
 9.5 × 6.6 × 2.65(mm)	— SC-63 E-pack	G1-1	5	DE5LC20U				
 13.2 × 10.2 × 4.7(mm)	— SC-83 similar STO-220	H1-1	10	DF10LC20U	DF10LC30			
			20	DF20LC20US	DF20LC30			
 13.2 × 10.2 × 4.6(mm)	— SC-83 similar FD	H2-2	20	D20FDC20L D20FDC20LUS				

Three Terminal Type								
Package	JEDEC Code JEITA Code House Name	Fig.	I <sub>F(AV)</sub> [A]	V <sub>RRM</sub> [V]				Remarks
				200	300	400	600	
 28.5 × 10.0 × 4.5(mm)	— SC-91 FTO-220AG	J8-1	5			SF5LC40UM		
			10			SF10LC40UM	SF10KC60M	
			20		SF20LC30M		SF20KC60M	
 28.5 × 10.0 × 4.5(mm)	— SC-91 FTO-220G	J9	5	SG5LC20USM				
			10	SG10LC20USM				
			20	SG20LC20USM				
 41.0 × 16.0 × 5.0(mm)	TO-247AD — MTO-3PT	K5-2	20	S20LC20UST	S20LC30T	S20LC40UT	S20LC60UST	
				S20LC40UV	S20LC60USV			
 41.0 × 16.0 × 5.0(mm)	TO-247AD — MTO-3PV	K7-1	20					

## Center Tap, Common Cathode

Surface Mount															
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]	t <sub>rr</sub> (max) [ns]				
— SC-63 E-pack	G1-1	DE5LC20U	200	5	81	50	150	0.98	2.5	10	35	—	—	■	—
— SC-83 similar STO-220	H1-1	DF10LC20U	200	10	127	80	150	0.98	5	10	35	—	—	—	—
		DF10LC30	300	10	124	80	150	1.30	5	25	30	—	—	—	—
		DF20LC20US	200	20	125	180	150	0.96	10	10	25	—	—	—	—
		DF20LC30	300	20	124	180	150	1.30	10	25	30	—	—	—	—
— SC-83 similar FD	H2-2	D20FDC20L	200	20	113	100	175	1.20	10	10	30	—	○	○	—
		D20FDC20LUS	200	20	125	180	150	0.96	10	10	25	—	—	○	—

■ : Please contact us.





Three Terminal Type															
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics				Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		V <sub>RRM</sub> [V]	I <sub>F(AV)</sub> [A]	Conditions T <sub>C</sub> [°C]	I <sub>FSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	I <sub>R</sub> (max) V <sub>R</sub> =V <sub>RRM</sub> [μA]	t <sub>rr</sub> (max) [ns]				
— SC-91 FTO-220AG	J8-1	SF5LC40UM	400	5	132	80	150	1.25	2.5	10	30	—	—	—	—
		SF10LC40UM	400	10	120	100	150	1.25	5	10	30	—	—	—	—
		SF10KC60M	600	10	109	120	150	1.50	5	10	85	—	—	■	K series
		SF20LC30M	300	20	107	250	150	1.30	10	25	30	—	—	—	—
		SF20KC60M	600	20	97	180	150	1.50	10	10	95	—	—	■	K series
— SC-91 FTO-220G	J9	SG5LC20USM	200	5	133	70	150	0.96	2.5	10	25	—	—	—	—
		SG10LC20USM	200	10	122	90	150	0.96	5	10	25	—	—	—	—
		SG20LC20USM	200	20	95	150	150	0.96	10	10	25	—	—	—	—
TO-247AD — MTO-3PT	K5-2	S20LC20UST	200	20	126	120	150	0.96	10	10	25	—	—	—	—
		S20LC30T	300	20	124	220	150	1.30	10	25	30	—	—	—	—
		S20LC40UT	400	20	123	130	150	1.25	10	10	30	—	—	—	—
		S20LC60UST	600	20	63	60	150	3.60	10	50	25	—	—	—	—
TO-247AD — MTO-3PV	K7-1	S20LC40UV	400	20	123	200	150	1.25	10	10	30	—	—	○	—
		S20LC60USV	600	20	65	60	150	3.60	10	50	25	—	—	○	—

■ : Please contact us.

# THYRISTORS

The Thyristor, in its normal state, will block an applied voltage in either direction, but when an appropriate current pulse is applied to the gate, current will flow through the anode to the cathode thus turning on power to the load circuit.  
 The Thyristor has a planar passivation, and is available in both the general reverse-blocking type and the type without reverse voltage.  
 The Thyristor without reverse voltage is suitable for a circuit limiting inrush current.

## Thyristors

Package	 10.0 × 6.6 × 2.3(mm)	 28.5 × 10.0 × 4.5(mm)		
JEDEC Code JEITA Code House Name	TO-252AA — FB	— SC-91 FTO-220AG		
Fig.	G2-2	J8-5		
Internal Circuit				
$I_T(AV)$ [A]	3	5	5	8
$V_{DRM}$ [V]	400	KC3FB40H	KC5FB40H	
	600		KC5FB60H KC5FB60HR KC5FB60HRT KC5FB60HV	KC5SF60HRT
	800			KC8SF80

■ : New product

## Thyristors

Package		Type No.	Absolute Maximum Ratings						Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive
JEDEC Code JEITA Code House Name	Fig.		$V_{DRM}$ [V]	$V_{RRM}$ [V]	$I_T(AV)$ [A]	Conditions $T_C$ [°C]	$I_{TSM}$ [A]	$T_J$ [°C]	$V_{TM(max)}$ [V]	Conditions $I_{TM}$ [A]	$V_{GT(max)}$ [V]	$I_{GT(max)}$ [μA]	$I_H(max)$ [mA]			
TO-252AA — FB	G2-2	KC3FB40H	400	400	3	111	40	-40 to 125	1.4	4	0.8	100	5	—	—	—
		KC5FB40H	400	400	5	101	65	-40 to 125	1.6	10	0.8	200	typ.1	—	—	—
		KC5FB60H	600	600	5	98	90	-40 to 125	1.8	15	0.8	100	5	—	—	—
		KC5FB60HR	600	—	5	98	90	-40 to 125	1.8	15	0.8	100	5	—	—	—
		■ KC5FB60HV	600	600	5	100	90	-40 to 125	1.8	15	0.8	50	5	—	—	—
— SC-91 FTO-220AG	J8-5	KC5SF60HRT	600	—	5	127	82	-40 to 150	1.8	15	0.8	100	5	—	—	—
		KC8SF80	800	800	8	130	120	-40 to 150	1.5	20	1.0	15mA	100	—	—	—



■ : New product

# SIDACs

SIDAC series are two-terminal bidirectional thyristor energized by the addition of a specific voltage. They are commonly used for switching devices or pulse generating devices.



## Bi-directional (K1V series)

- Features
  - Symmetrical characteristics.
  - Operating directly from the AC mains, and can be used in all kinds of pulse generating circuits.
  - The glass passivation ensures high reliability.
- Applications
  - Pulse generation : gas igniters,HID(high intensity discharge)lamp drive circuit,etc.
  - AC switching : drive circuit for switching power supplies,voltage detecting circuits,etc.
  - Over voltage protection : AC line surge protection,capacitor rupture prevention,etc.

Package		5.0 × 2.5 × 2.0(mm)
JEDEC Code JEITA Code House Name	DO-214AC - 1F	
Fig.	B4-3	
Internal Circuit		
V <sub>DRM</sub> [V]	5	K1VZL09
	15	K1VZL20

## Uni-directional (G1V series)

- Features
  - Uni-directional characteristics.
  - Smaller package than bi-directional SIDAC.
  - Switching operation from DC power for pulse generation.
  - The glass passivation ensures high reliability.
- Applications
  - Pulse generation : gas igniters,negative ion generators, HID(high intensity discharge) lamp drive circuit,etc.
  - Over voltage protection : DC line surge protection.

Package		5.0 × 2.5 × 2.0(mm)
JEDEC Code JEITA Code House Name	DO-214AC - 1F	
Fig.	B3-3	
Internal Circuit		
V <sub>DRM(A)</sub> [V]	70	G1VL8C
	90	G1VL10C
	120	G1VL15C
	170	G1VL20C
	190	G1VL22C G1VL24C

## Bi-directional (K1V series)

Surface Mount		Type No.	Absolute Maximum Ratings					Electrical Characteristics						Halogen free	Automotive	
JEDEC Code JEITA Code House Name	Fig.		V <sub>DRM</sub> [V]	I <sub>T</sub> [A]	Conditions T <sub>L</sub> [°C]	T <sub>stg</sub> [°C]	T <sub>j</sub> [°C]	V <sub>BO</sub> [V]	I <sub>DRM</sub> (max) [μA]	Conditions V <sub>D</sub> [V]	I <sub>BO</sub> (max) [mA]	I <sub>H</sub> (typ) [mA]	V <sub>T</sub> (max) [V]			Conditions I <sub>T</sub> [A]
DO-214AC - 1F	B4-3	K1VZL09	5	0.5	110	-40 to 125	125	8 to 12	5	5	20	20	1.2	0.5	-	-
		K1VZL20	15	0.5	110	-40 to 125	125	18 to 22	5	15	20	20	1.2	0.5	-	-

## Uni-directional (G1V series)

Surface Mount		Type No.	Absolute Maximum Ratings						Electrical Characteristics					Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.		V <sub>DRM(A)</sub> [V]	I <sub>T</sub> [A]	Conditions T <sub>L</sub> [°C]	I <sub>TRM</sub> [A]	Conditions f [Hz]	di <sub>T</sub> /dt [A/μs]	T <sub>j</sub> [°C]	V <sub>BO(A)</sub> [V]	I <sub>H(A),(K)</sub> (max) [mA]	V <sub>T(A),(K)</sub> (max) [V]	Conditions I <sub>T</sub> [A]		
DO-214AC - 1F	B3-3	G1VL8C	70	1	98	80	60	150	125	75 to 90	100	1.5	1	-	-
		G1VL10C	90	1	98	150	60	150	125	95 to 110	100	1.5	1	-	-
		G1VL15C	120	1	98	120	60	150	125	142 to 157	60	1.5	1	-	-
		G1VL20C	170	1	98	120	60	150	125	190 to 210	60	1.5	1	-	-
		G1VL22C	190	1	98	280	5	150	125	210 to 230	60	1.5	1	-	-
		G1VL24C	190	1	98	280	5	150	150	230 to 250	60	1.5	1	-	-






# TRIACs

TRIACs are bidirectional Thyristors.

Our TRIACs are easy to use for motor and heater controls due to balanced gate sensitivity and  $(di/dt)_c$ .

Our lineup ranges from  $V_{DRM}=600$  or  $800V$ ,  $I_{T(RMS)}=3$  to  $20A$ .

## TRIACs (Triode for Alternating Current)

Package			
	10.0 × 6.6 × 2.3(mm)	28.5 × 10.0 × 4.5(mm)	28.5 × 10.0 × 4.5(mm)
JEDEC Code	TO-252AA	—	—
JEITA Code	—	SC-91	SC-91
House Name	FB	FTO-220A	FTO-220AG
Fig.	G2-3	J7-4	J8-4
Internal Circuit			
$V_{DRM}$ [V]	600		800
$I_{T(RMS)}$ [A]	3	KD3FB60	KD3SF60E KD3SF60
	5		KD5SF60 ★ KD5SF80
	8		KD8SF60 ★ KD8SF80
	12		KD12SF60 ★ KD12SF80
	16	★ KD16SF60A	KD16SF60 ★ KD16SF80
	20	★ KD20SF60A	KD20SF60 ★ KD20SF80
25	★ KD25SF60A		

★ : New product ★ : Under development

## TRIACs (Triode for Alternating Current)

Surface Mount		Type No.	Absolute Maximum Ratings			Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	
JEDEC Code	Fig.		$V_{DRM}$	$I_T$ (RMS)	$T_J$	$V_{TM}$ (max)	Conditions	$V_{GT}$ (max)	$I_{GT}$ (max)	$(dv/dt)_c$ (min)				Conditions
JEITA Code		[V]	[A]	[°C]	[V]	$I_{TM}$ [A]	(I, II, III)* [V]	(I, II, III)* [mA]	( $T_j=150^\circ\text{C}, V_D=2/3V_{DRM}$ ) [V/ $\mu\text{s}$ ]	(di/dt) <sub>c</sub> [A/ms]				
TO-252AA	G2-3	KD3FB60	600	3	-40 to 150	1.7	4.5	1.5	15	1	-1.5	—	—	—
House Name	FB													

\* : Operation mode IV is not guaranteed.

Three Terminal Type		Type No.	Absolute Maximum Ratings			Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	
JEDEC Code	Fig.		$V_{DRM}$	$I_T$ (RMS)	$T_J$	$V_{TM}$ (max)	Conditions	$V_{GT}$ (max)	$I_{GT}$ (max)	$(dv/dt)_c$ (min)				Conditions
JEITA Code		[V]	[A]	[°C]	[V]	$I_{TM}$ [A]	(I, II, III)* [V]	(I, II, III)* [mA]	( $T_j=150^\circ\text{C}, V_D=2/3V_{DRM}$ ) [V/ $\mu\text{s}$ ]	(di/dt) <sub>c</sub> [A/ms]				
—	J7-4	★ KD16SF60A	600	16	-40 to 150	1.6	20	1.5	30	1	-6	—	—	—
—		★ KD20SF60A	600	20	-40 to 150	1.5	25	1.5	30	1	-8	—	—	—
—		★ KD25SF60A	600	25	-40 to 150	1.4	30	1.5	30	1	-10	—	—	—
—	J8-4	KD3SF60E	600	3	-40 to 150	1.5	4.5	1.5	10	—	—	—	—	—
		KD3SF60	600	3	-40 to 150	1.5	4.5	1.5	20	1	-1.5	—	—	—
		KD5SF60	600	5	-40 to 150	1.8	7	1.5	20	1	-2.5	—	—	—
		KD8SF60	600	8	-40 to 150	1.6	12	1.5	30	1	-4.0	—	—	—
		KD12SF60	600	12	-40 to 150	1.6	20	1.5	30	1	-6.0	—	—	—
		KD16SF60	600	16	-40 to 150	1.5	25	1.5	30	1	-8.0	—	—	—
		KD20SF60	600	20	-40 to 150	1.4	30	1.5	30	1	-10.0	—	—	—
		★ KD5SF60S	600	5	-40 to 150	1.5	4.5	1.5	20	1	-1.5	—	—	—
		★ KD8SF60S	600	8	-40 to 150	1.8	7	1.5	20	1	-2.5	—	—	—
		★ KD12SF60S	600	12	-40 to 150	1.6	12	1.5	30	1	-4	—	—	—
		★ KD16SF60S	600	16	-40 to 150	1.6	20	1.5	30	1	-6	—	—	—
		★ KD20SF60S	600	20	-40 to 150	1.5	25	1.5	30	1	-8	—	—	—
		★ KD5SF80	800	5	-40 to 150	1.8	7	1.5	35	1	-1.5	—	—	—
		★ KD8SF80	800	8	-40 to 150	1.6	12	1.5	35	1	-4	—	—	—
		★ KD12SF80	800	12	-40 to 150	1.6	20	1.5	35	1	-4	—	—	—
★ KD16SF80	800	16	-40 to 150	1.5	25	1.5	35	1	-4	—	—	—		
★ KD20SF80	800	20	-40 to 150	1.4	30	1.5	35	1	-4	—	—	—		

★ : New product ★ : Under development \* : Operation mode IV is not guaranteed.

Operation Mode	Terminal Characteristics		
	① T1	②④ T2	③ G
I	—	+	+
II	—	+	—
III	+	—	—
IV	+	—	+








# SURGE ABSORBERS

Surge Absorbers are semiconductor devices of the Thyristor type that turns on when triggered by their rated voltage. They are commonly used for lightning surge protection in communications equipment.

## Thyristor Surge Suppressors

- Features**
- Bi-directional or uni-directional characteristics.
  - High speed response.
  - Large surge current capacity.
  - Repetitive use against surges is possible.



- Applications**
- Lightning surge adsorption for communications circuits.
  - Lightning surge adsorption for transmitters and switchboards.
  - Surge protection for ISDN terminals.

Series	KL series	KU series	KP series	
Package	 5.0 × 2.5 × 2.0(mm)	 5.1 × 3.75 × 2.0(mm)	 7.6 × 4.0 × 2.8(mm)	
JEDEC Code JEITA Code House Name	DO-214AC - 1F	DO-214AA similar - M2F	- - 2F	
Fig.	B4-3	B7 B8	B9-4	
Internal Circuit				
Off-state Voltage V <sub>D</sub> [V]	5	KL3Z07		
	15	KL3Z18		
	58	KL3L07		
	63		KU10L08	
	70		KU4F8	
	90		KU10NU11	
	92			KP20NU11 KP40NU11
	100		KU4F12	
	115		KU10NU13	
	120	KL3N14	KU10N14 KU15N14	
	175	KL3R20		
	180			KP40RU22
	190		KU10R23NS	
	220		KU10R27NS	
250		KU10R29NS		
275		KU5S31NS KU10S31NS KU10S35NS		

## Varistor

- Features**
- Bi-directional surge absorption is possible.
  - Low junction capacitance.

- Applications**
- Telephone set surge absorption.
  - Digital communications circuit surge absorption.
  - ISDN terminal surge absorption.

Package	 5.0 × 2.5 × 2.0(mm)
JEDEC Code JEITA Code House Name	DO-214AC - 1F
Fig.	B4-1
Internal Circuit	
V <sub>F</sub> [V]	2.3 ± 0.25 VR61F1

## Thyristor Surge Suppressors

Package		Type No.	Absolute Maximum Ratings				Electrical Characteristics			Halogen free	UL	Automotive
JEDEC Code JEITA Code House Name	Fig.		V <sub>BRM</sub> [V]	I <sub>ISM</sub> [A]	Conditions [μs]	T <sub>J</sub> [°C]	V <sub>BO</sub> (min) [V]	I <sub>H</sub> (min) [mA]	C <sub>t</sub> (max) [pF]			
DO-214AC - 1F	B4-3	KL3Z07	5	30	10/1000	125	5.5 *1	50	-	-	-	
		KL3Z18	15	30	10/1000	125	15.5 *1	50	-	-	-	
		KL3L07	58	30	10/1000	125	65	100	90	-	-	
		KL3N14	120	30	10/1000	125	130	100	50	-	-	
DO-214AA similar - M2F	B7	KU10L08	63	100	10/1000	125	70	100	180	-	UL	-
		KU4F8	70	40	10/1000	125	75	100	100	-	-	-
	B7	KU10NU11	60	100	10/1000	125	100	150	-	-	-	-
		KU4F12	100	40	10/1000	125	110	100	100	-	-	-
		KU10NU13	60	100	10/1000	125	120	100	-	-	-	-
		KU10N14	120	100	10/1000	125	125	100	140	-	UL	-
		KU15N14	120	150	10/1000	125	125	100	110	-	UL	-
		KU10R23NS	190	100	10/1000	125	290 *2	100	90	-	-	-
		KU10R27NS	220	100	10/1000	125	320 *2	100	70	-	UL	-
		KU10R29NS	250	100	10/1000	125	400 *2	100	70	-	UL	-
		KU5S31NS	275	50	10/1000	125	420 *2	150	70	-	-	-
	B9-4	KU10S31NS	275	100	10/1000	125	420 *2	100	90	-	UL	-
		KU10S35NS	275	100	10/1000	125	450 *2	100	90	-	UL	-
KP20NU11		60	325	10/700	125	100	150	295 *3	-	-	-	
- - 2F	B9-4	KP40NU11	60	500	10/700	125	100	150	485 *3	-	-	-
		KP40RU22	60	500	10/700	125	195	100	285 *3	-	-	-

\*1 : V<sub>BR</sub> \*2 : V<sub>CL(max)</sub> \*3 : typ.  : UL497B recognized (UL File No. E183905)

## Varistor

Package		Type No.	Absolute Maximum Ratings			Electrical Characteristics		Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.		I <sub>F(RMS)</sub> [A]	I <sub>FSM(RMS)</sub> [A]	T <sub>J</sub> [°C]	V <sub>F</sub> [V]	Conditions I <sub>F</sub> [mA]		
DO-214AC - 1F	B4-1	VR61F1	0.37(*1)/0.28(*2)	7.5	-55 to 150	2.3 ± 0.25	1	-	-

\*1 : On alumina substrate \*2 : On glass-epoxy substrate

# TVS (Transient Surge Suppressor)

TVSs are low voltage PN junction type devices.

These devices utilize technologically stable glass passivation (an in-house design) with a structural advantage that brings high resistance against heat and humidity.

They are available with a voltage range between 12 to 320V and peak pulse power from 200 to 8000W.

## TVS

- Features
  - High speed response.
  - Absorption energy tolerance capacity.
  - Narrow clamping voltage width.
  - Lineup of Bi-directional type (DL series) for surge absorption.

- Applications
  - IC protection for telephones.
  - IC protection against abnormal voltage.
  - Protection for load dump noise.

Peak pulse power	200W		600W	2000W		
Package						
JEDEC Code	DO-219AB similar	DO-214AC	DO-214AC	SC-110B	2F	TO-277A similar
JEITA Code	SC-109	1F	1F	CE		FY
House Name	G1F					
Fig.	B1-2	B3-2	B4-2	B5-2	B9-5	B10
Internal Circuit						
V <sub>BR</sub> (typ) [V]	12.5	ST02-12G1	ST04-12F1			
	14	ST02-14G1	ST04-14F1			
	16	ST02-16G1	ST04-16F1			
	18	ST02-18G1	ST04-18F1	DL04-18F1	ST06-18CE	ST20-18FY
	20	ST02-20G1	ST04-20F1			
	24	ST02-24G1	ST04-24F1			
	27	ST02-27G1	ST04-27F1		ST06-27CE	ST20-27F2
	30	ST02-30G1	ST04-30F1		ST06-30CE	ST20-30F2
	33	ST02-33G1	ST04-33F1	DL04-33F1	ST06-33CE	ST20-33F2
	36	ST02-36G1	ST04-36F1	DL04-36F1	ST06-36CE	ST20-36F2
	39	ST02-39G1	ST04-39F1		ST06-39CE	
	43	ST02-43G1	ST03-43F1			
	47	ST02-47G1	ST03-47F1			ST20-47F2
	58	ST02-58G1	ST03-58F1			
	68		ST03-68F1			
	75		ST02-75F1			
	82		ST02-82F1			
	100		ST02-100F1			
	120		ST02-120F1			
	145		ST02-140F1			
170		ST02-170F1				
200		ST02-200F1				
240		ST03-240F1				
280		ST02-280F1				
320		ST02-320F1				

■ : New product

## TVS








Package	JEDEC Code	JEITA Code	House Name	Fig.	Type No.	Absolute Maximum Ratings				Electrical Characteristics			Halogen free	Based on AEC-Q101	Automotive
						PrSM [W]	V <sub>R</sub> (DC) [V]	I <sub>RSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>BR</sub> (min) [V]	V <sub>BR</sub> (max) [V]	Conditions I <sub>R</sub> [mA]			
DO-219AB similar SC-109 G1F	B1-2	ST02-12G1	200	9	11.2	-55 to 175	11.5	13.5	5	5	9	-	○	○	
		ST02-14G1	200	12.8	10.0	-55 to 175	13.5	15	5	5	12.8	-	○	○	
		ST02-16G1	200	13.6	9.1	-55 to 175	14.4	17.6	5	5	13.6	-	○	○	
		ST02-18G1	200	13	7.5	-55 to 175	16.8	19.1	5	5	13	-	○	○	
		ST02-20G1	200	16	6.7	-55 to 175	18.8	22	5	5	16	-	○	○	
		ST02-24G1	200	20	5.8	-55 to 175	22	25.6	5	5	20	-	○	○	
		ST02-27G1	200	23	5.5	-55 to 175	25.1	28.9	2	5	23	-	○	○	
		ST02-30G1	200	24	5.0	-55 to 175	28	32	2	5	24	-	○	○	
		ST02-33G1	200	25	4.5	-55 to 175	31	35	2	5	25	-	○	○	
		ST02-36G1	200	27	4.0	-55 to 175	34	38	2	5	27	-	○	○	
		ST02-39G1	200	30	3.8	-55 to 175	37	41	2	5	30	-	○	○	
		ST02-43G1	200	33	3.5	-55 to 175	40	45	2	5	33	-	○	○	
		ST02-47G1	195	37	3.0	-55 to 175	42	52	2	5	37	-	○	○	
		ST02-58G1	175	45	2.2	-55 to 175	52	64	2	5	45	-	○	○	
DO-214AC 1F	B3-2	ST04-12F1	400	9	24.0	-55 to 175	11.5	13.5	1	5	9	-	○	○	
		ST04-14F1	400	12.8	18.0	-55 to 175	13.5	15	1	5	12.8	-	○	○	
		ST04-16F1	400	13.6	15.0	-55 to 175	14.4	17.6	1	5	13.6	-	○	○	
		ST04-18F1	400	15.3	15.0	-55 to 175	16.8	19.1	1	5	15.3	-	○	○	
		ST04-20F1	400	16	15.0	-55 to 175	18.8	21.2	1	5	16	-	○	○	
		ST04-24F1	400	20	12.0	-55 to 175	22.8	25.6	1	5	20	-	○	○	
		ST04-27F1	400	23	10.0	-55 to 175	24.3	29.7	1	5	23	-	○	○	
		ST04-30F1	400	24	8.5	-55 to 175	28	32	1	5	24	-	○	○	
		ST04-33F1	400	25	8.0	-55 to 175	31	35	1	5	25	-	○	○	
		ST04-36F1	400	27	7.5	-55 to 175	34	38	1	5	27	-	○	○	
		ST04-39F1	400	30	7.0	-55 to 175	37	41	1	5	30	-	○	○	
		ST03-43F1	300	33	5.0	-55 to 150	40	45	1	5	33	-	○	○	
		ST03-58F1	300	37	5.0	-55 to 150	42	52	1	5	37	-	○	○	
		ST03-68F1	300	45	4.0	-55 to 150	52	64	1	5	45	-	○	○	
		ST03-68F1	300	58	3.0	-55 to 150	64.4	71.2	1	5	58	-	○	○	
		ST02-75F1	200	61	2.0	-55 to 150	70	79	1	5	61	-	○	○	
		ST02-82F1	200	67	2.0	-55 to 150	74	90	1	5	67	-	○	○	
		ST02-100F1	200	80	1.7	-55 to 150	90	110	1	5	80	-	○	○	
		ST02-120F1	200	100	1.4	-55 to 150	110	130	1	5	33	-	○	○	
		ST02-140F1	200	120	1.0	-55 to 150	130	160	1	5	120	-	○	○	
ST02-170F1	200	145	0.75	-55 to 150	155	185	1	5	145	-	○	○			
ST02-200F1	200	170	0.7	-55 to 150	185	215	1	5	170	-	○	○			
ST03-240F1	310	200	1.0	-55 to 175	220	250	1	5	200	-	○	○			
ST02-280F1	200	230	0.5	-55 to 175	250	300	1	5	230	-	○	○			
ST02-320F1	150	260	0.38	-55 to 175	300	350	1	5	260	-	○	○			
DO-214AC 1F	B4-2	DL04-18F1	400	13	-	-55 to 150	16.8	19.1	5	5	13	-	○	○	
		DL04-33F1	400	25	9.5	-55 to 175	31	35	1	5	25	-	○	○	
		DL04-36F1	400	27	8.0	-55 to 175	34	38	1	5	27	-	○	○	
SC-110B CE	B5-2	ST06-18CE	600	13	26.0	-55 to 175	16.8	19.1	1	5	13	-	○	○	
		ST06-27CE	600	23	17.3	-55 to 175	25	29	1	5	23	-	○	○	
		ST06-30CE	600	24	15.0	-55 to 175	28	32	1	5	24	-	○	○	
		ST06-33CE	600	25	14.0	-55 to 175	31	35	1	5	25	-	○	○	
		ST06-36CE	600	27	12.4	-55 to 175	34	38	1	5	27	-	○	○	
		ST06-39CE	600	30	11.0	-55 to 175	37	41	1	5	30	-	○	○	
2F	B9-5	ST20-47F2	1700	37	31.0	-55 to 175	42	52	1	5	37	-	○	○	
		ST20-27F2	2000	23	54.0	-55 to 175	24.3	29.7	1	5	23	-	○	○	
		ST20-30F2	2000	24	50.0	-55 to 175	28	32	1	5	24	-	○	○	
		ST20-33F2	2000	25	45.0	-55 to 175	31	35	1	5	25	-	○	○	
	B11	DL20B-27F2	2000	23	51	-55 to 175	25	29	1	5	23	-	○	○	
		DL20B-30F2	2000	24	46	-55 to 175	28	32	1	5	24	-	○	○	
		DL20B-33F2	2000	25	41	-55 to 175	31	35	1	5	25	-	○	○	
		DL20B-36F2	2000	27	36	-55 to 175	34	38	1	5	27	-	○	○	
TO-277A similar FY	G4-2	ST20-18FY	1800	16	57	-55 to 175	17.2	19.1	1	5	16	-	○	○	
		ST20-27FY	1800	23	45	-55 to 175	25.0	29.0	1	5	23	-	○	○	
		ST20-30FY	1800	24	41	-55 to 175	28.0	32.0	1	5	24	-	○	○	
		ST20-33FY	1800	25	38	-55 to 175	31.0	35.0	1	5	25	-	○	○	
		ST20-36FY	1800	27	35	-55 to 175	34.0	38.0	1	5	27	-	○	○	
ST20-39FY	1800	30	30	-55 to 175	37.0	41.0	1	5	30	-	○	○			

■ : New product

# TVS (Transient Surge Suppressor)

## TVS



- Features
  - High speed response.
  - Absorption energy tolerance capacity.
  - Narrow clamping voltage width.
  - Lineup of Bi-directional type (DL series) for surge absorption.
- Applications
  - IC protection for telephones.
  - IC protection against abnormal voltage.
  - Protection for load dump noise.

Peak pulse power		6000 ~ 8000W (Load Dump Surge Protecting)		
Package				
	9.0 × 7.0 × 9.0(mm)	13.2 × 10.2 × 4.7(mm)	15.0 × 10.2 × 4.0(mm)	
JEDEC Code JEITA Code House Name	- - MCP	- SC-83 similar STO-220	- TO-263AB - FZ	
Fig.	E1	H1-6	H6	
Internal Circuit				
VBR (typ) [V]	14	ST80-14MF		
	22	 ST70-22MF		
	27	ST70-27MF	ST70-27F	ST70-27FZ
	30	ST70-30MF		
	40	ST60-40MF		
48	ST60-48MF			


 : New product

## Power Clampers

- Features
  - High speed response.
  - Absorption energy tolerance capacity.
  - Narrow clamping voltage width.
  - Reverse blocking type.
- Application
  - Snubber circuit in the primary side of switch-mode power supplies.

Package		7.6 × 4.0 × 2.8(mm)
JEDEC Code JEITA Code House Name	- - 2F	
Fig.	B9-3	
Internal Circuit		
VBR (typ) [V]	145	ST02D-140F2
	170	ST02D-170F2

## TVS

Package		Type No.	Absolute Maximum Ratings				Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive
JEDEC Code JEITA Code House Name	Fig.		PrSM [W]	V <sub>R</sub> (DC) [V]	I <sub>RSM</sub> [A]	T <sub>J</sub> [°C]	V <sub>BR</sub> (min) [V]	V <sub>BR</sub> (max) [V]	Conditions I <sub>R</sub> [mA]	I <sub>R</sub> (max) [μA]	Conditions V <sub>R</sub> [V]			
-	MCP	ST80-14MF	8000	12	400	-40 to 150	13	15	1	10	12	-	-	○
		 ST70-22MF	7000	18	220	-40 to 150	20.8	23.6	1	5	18	-	-	○
		ST70-27MF	7000	23	180	-40 to 150	24.3	29.7	1	5	23	-	-	○
		ST70-30MF	7000	26	160	-40 to 150	27.5	33	1	5	26	-	-	○
		ST60-40MF	6000	32	100	-40 to 150	36.5	44	1	5	32	-	-	○
		ST60-48MF	6000	40	100	-40 to 150	43.2	54	1	5	40	-	-	○
- SC-83 similar STO-220	H1-6	ST70-27F	7000	23	180	-40 to 150	24.3	29.7	1	5	23	-	-	○
- TO-263AB - FZ	H6	ST70-27FZ	7000	23	180	-55 to 175	25	29	1	5	23	○	○	○

 : New product

## Power Clampers



Surface Mount		Type No.	Absolute Maximum Ratings				Electrical Characteristics						Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.		PrSM [W]	ZD		T <sub>J</sub> [°C]	ZD			Di				
		V <sub>RRM</sub> [V]		V <sub>R</sub> (DC) [V]			V <sub>BR</sub> (min) [V]	V <sub>BR</sub> (max) [V]	Conditions I <sub>R</sub> [mA]	I <sub>R</sub> (max) [μA]	I <sub>R</sub> (max) [μA]	Conditions V <sub>R</sub> [V]		
-	B9-3	ST02D-140F2	200	120	600	-40 to 150	130	160	1	5	5	600	-	-
		ST02D-170F2	200	145	600	-40 to 150	155	185	1	5	5	600	-	-







# POWER MOSFETs

## EETMOS Series (Nch Dual)

Surface Mount							
Package	JEDEC Code JEITA Code House Name	Fig.	Id [A]	Vdss [V]			Remarks
	MO-235B - LF-Dual	G8	12	40	60	100	
			15	P15LF6QTKD			
			17	P17LF10SLKD			
			20	P20LF4QTKD			
			33	P33LF6QLKD P33LF6QTKD			
			39	P39LF6QTKD			
			41	P41LF4QTKD			
			50	P50LF4QTKD			

6.05 × 5.00 × 1.05(mm)

## EETMOS Series (Pch Single)

Surface Mount						
Package	JEDEC Code JEITA Code House Name	Fig.	Id [A]	Vdss [V]		Remarks
	MO-235B similar - LF	G7-2	-35	-40	-60	
			-50	★ P35LF6PQLK		
			-56	★ P50LF6PQLK		
			-63	★ P56LF4PQLK	★ P63LF6PQLK	
			-74	★ P74LF4PQLK		
			-96	★ P96LF4PQLK		

6.05 × 5.00 × 1.05(mm)

★ : Under development

## EETMOS Series (Nch Dual)

Surface Mount																
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		Vdss [V]	Id [A]	Idp [A]	Pt [W]	Tch [°C]	Rds(on) (typ) [mΩ] Vgs=10V	Rds(on) (max) [mΩ] Vgs=10V	Ciss [pF]	Qg [nC]	Vth [V]				
MO-235B - LF-Dual	G8	P20LF4QTKD	40	20	60	35	-55 to 175	12.3	15.3	630	16	2	○	○	○	EETMOS4
		P41LF4QTKD	40	41	123	50	-55 to 175	5.3	6.7	1478	31	2	○	○	○	EETMOS4
		P50LF4QTKD	40	50	150	62	-55 to 175	4.4	5.5	1748	35	2	○	○	○	EETMOS4
		P15LF6QTKD	60	15	45	35	-55 to 175	24	30	632	15	2	○	○	○	EETMOS4
		P33LF6QLKD	60	33	99	50	-55 to 175	10.5	13.1	1913	37	2	○	○	○	EETMOS4
		P33LF6QTKD	60	33	99	50	-55 to 175	10	12.5	1495	30	2	○	○	○	EETMOS4
		P39LF6QTKD	60	39	117	62	-55 to 175	8.3	10.4	1765	35	2	○	○	○	EETMOS4
		P12LF10SLKD	100	12	36	50	-55 to 175	34	42	1420	32	2	○	■	○	EETMOS3
		P17LF10SLKD	100	17	51	62	-55 to 175	29	36	1685	36	2	○	■	○	EETMOS3

■ : Please contact us.

## EETMOS Series (Pch Single)

Surface Mount																
Package		Type No.	Absolute Maximum Ratings					Electrical Characteristics					Halogen free	Based on AEC-Q101	Automotive	Series
JEDEC Code JEITA Code House Name	Fig.		Vdss [V]	Id [A]	Idp [A]	Pt [W]	Tch [°C]	Rds(on) (typ) [mΩ] Vgs=10V	Rds(on) (max) [mΩ] Vgs=10V	Ciss [pF]	Qg [nC]	Vth [V]				
MO-235B similar - LF	G7-2	★ P56LF4PQLK	-40	-56	-168	124	175	9.3	11.6	2206	43	-2.0	○	TBD	○	EETMOS4
		★ P74LF4PQLK	-40	-74	-222	169	175	5.5	6.9	3589	71	-2.0	○	TBD	○	EETMOS4
		★ P96LF4PQLK	-40	-96	-384	217	175	3.1	3.9	5570	112	-2.0	○	TBD	○	EETMOS4
		★ P35LF6PQLK	-60	-35	-105	124	175	25	32	1963	TBD	-2.0	○	TBD	○	EETMOS4
		★ P50LF6PQLK	-60	-50	-150	169	175	14.5	18.1	3402	TBD	-2.0	○	TBD	○	EETMOS4
		★ P63LF6PQLK	-60	-63	-252	217	175	8.4	10.5	5515	TBD	-2.0	○	TBD	○	EETMOS4


★ : Under development




# POWER MODULES

Power Modules include combinations of various power semiconductors. They are easy to design, reduce the number of components needed in the device, are suitable for device downsizing, and mitigate heat-dissipation concerns. At Shindengen, a multitude of packages allow us to meet customer needs of MOSFET, diodes, and other products. Semi customizable support and customizable package design support are available.

## Transfer Type Package Sample

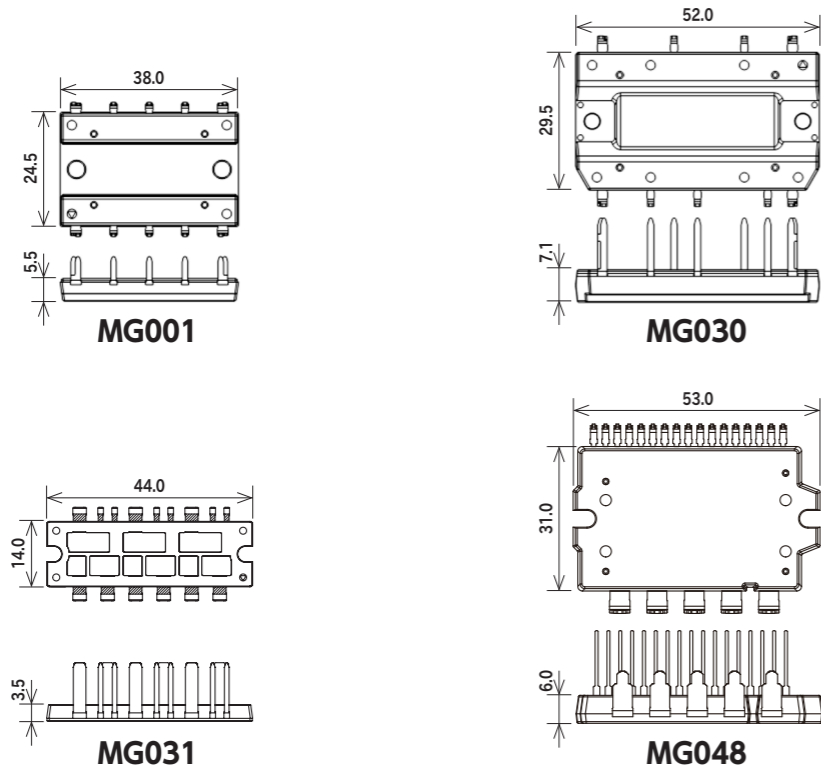

## Potting Type Package Sample

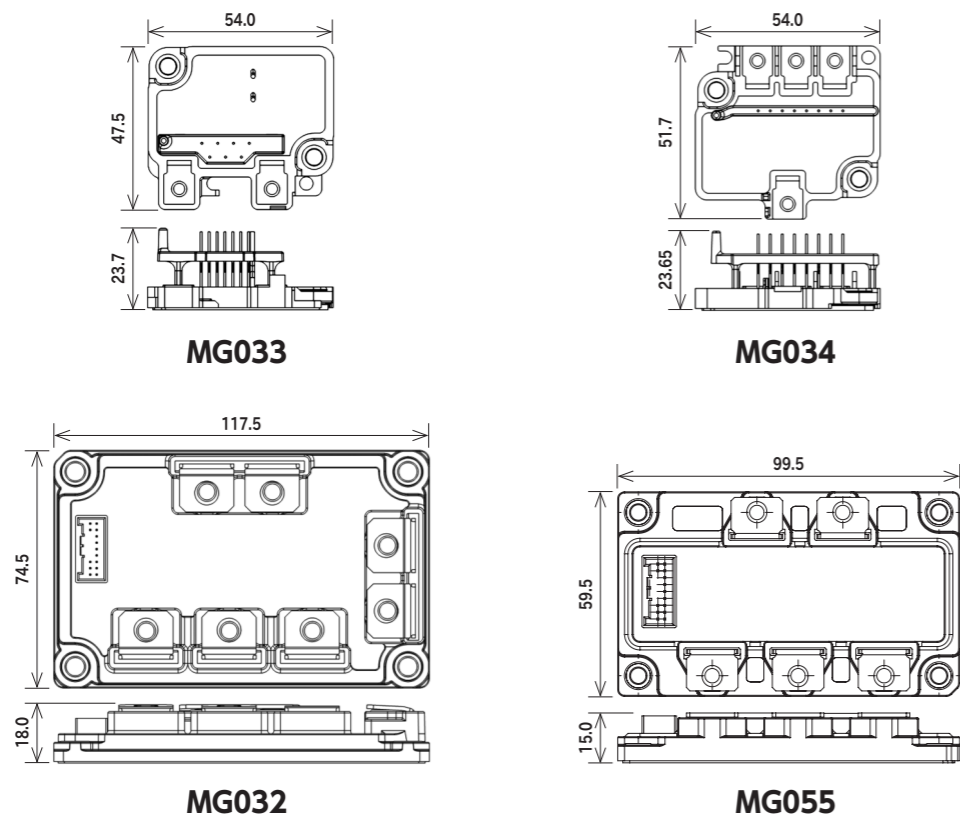

## CB Module Series

### Converter + Brake Modules

Package JEDEC Code JEITA Code House Name	Fig.	Type No.	Converter Diode					Brake IGBT				Brake FRD					Halogen free	UL	Automotive	
			Absolute Maximum Ratings			Electric Characteristics		Absolute Maximum Ratings		Electric Characteristics		Absolute Maximum Ratings			Electric Characteristics					
			V <sub>RRM</sub> [V]	I <sub>F</sub> (AV) [A]	Conditions T <sub>C</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]	V <sub>CEs</sub> [V]	I <sub>C</sub> [A]	V <sub>CE</sub> (sat) (typ) [V]	Conditions I <sub>C</sub> [A]	V <sub>RRM</sub> [V]	I <sub>F</sub> (AV) [A]	Conditions T <sub>C</sub> [°C]	V <sub>F</sub> (max) [V]	Conditions I <sub>F</sub> [A]				t <sub>rr</sub> (max) [ns]
-	F4	MG001AK028060A	600	20	137	1.05	7	600	28	1.70	28	600	3	137	1.65	3	50	○	UL	-
MG001		MG001AL030060A	600	30	136	1.05	10	600	30	1.5	30	600	3	137	1.65	3	50	○	UL	-

UL : UL recognized (UL File No. E142422)


## SiC Module Series

### SiC Modules

Package JEDEC Code JEITA Code House Name	Fig.	Type No.	Absolute Maximum Ratings							Electrical Characteristics						Halogen free	UL	Automotive		
			V <sub>DSS</sub> [V]	I <sub>D</sub> [A]	I <sub>DP</sub> [A]	P <sub>T</sub> [W]	T <sub>ch</sub> [°C]	R <sub>DS(ON)</sub> (typ) [mΩ] V <sub>GS</sub> =18V	R <sub>DS(ON)</sub> (max) [mΩ] V <sub>GS</sub> =18V	C <sub>iss</sub> [pF]	Q <sub>g</sub> [nC]	V <sub>th</sub> [V]	R <sub>th(j-c)</sub> (max) [°C/W]							
-	F13	★ MG074D	750	■	■	■	■	(13)	TBD	■	■	■	■	■	■	■	■	■	■	■
-		★ MG074E	750	■	■	■	■	(26)	TBD	■	■	■	■	■	■	■	■	■	■	■
-		★ MG074F	750	■	■	■	■	(45)	TBD	■	■	■	■	■	■	■	■	■	■	■
MG074		★ MG074G	750	■	■	■	■	(28)	TBD	■	■	■	■	■	■	■	■	■	■	■
		★ MG074H	750	■	■	■	■	(50)	TBD	■	■	■	■	■	■	■	■	■	■	■

★ : Under development ■ : Please contact us.

## Equivalent Circuit Schematic

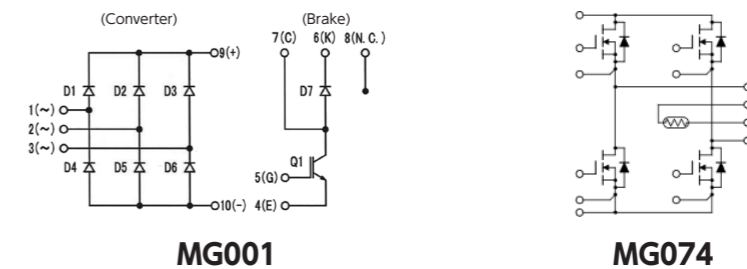


## INV Module Series

### Inverter Modules

Package JEDEC Code JEITA Code House Name	Fig.	Type No.	Absolute Maximum Ratings							Electrical Characteristics						Halogen free	UL	Automotive
			V <sub>DSS</sub> [V]	I <sub>D</sub> [A]	I <sub>DP</sub> [A]	P <sub>T</sub> [W]	T <sub>ch</sub> [°C]	R <sub>DS(ON)</sub> (typ) [mΩ] V <sub>GS</sub> =10V	R <sub>DS(ON)</sub> (max) [mΩ] V <sub>GS</sub> =10V	C <sub>iss</sub> (typ) [pF]	Q <sub>g</sub> (typ) [nC]	V <sub>th</sub> (typ) [V]	R <sub>th(j-c)</sub> (max) [°C/W]					
-	F5	MG031B090004A	40	90	360	125	175	2.34	3.2	4180	76	2.0	1.2	○	-	○		
-		MG031E120004A	40	120	480	125	175	2.4	3.1	3297	61	3.0	1.2	○	-	○		
-		MG031G148004A	40	148	592	154	175	1.75	2.2	5330	96	3.0	0.97	○	-	○		
-		MG031L080006A	60	80	320	125	175	4.2	5.6	3381	60	3.0	1.2	○	-	○		
-		MG031N110006A	60	110	440	154	175	2.9	3.8	5535	96	3.0	0.97	○	-	○		
-		MG031MC148004A	40	148	592	154	175	1.75	2.2	5330	96	3.0	0.97	○	-	○		
-		MG031MD110006A	60	110	440	154	175	2.9	3.8	5535	96	3.0	0.97	○	-	○		
-	F6	MG032A4207R5A	75	420	840	500	150	-	0.98	80120	505	3.0	0.25	-	-	○		
MG032		MG032B420010A	100	420	840	500	150	0.99	1.37	91800	500	3.0	0.25	-	-	○		

■ : Please contact us.

## Equivalent Circuit Schematic

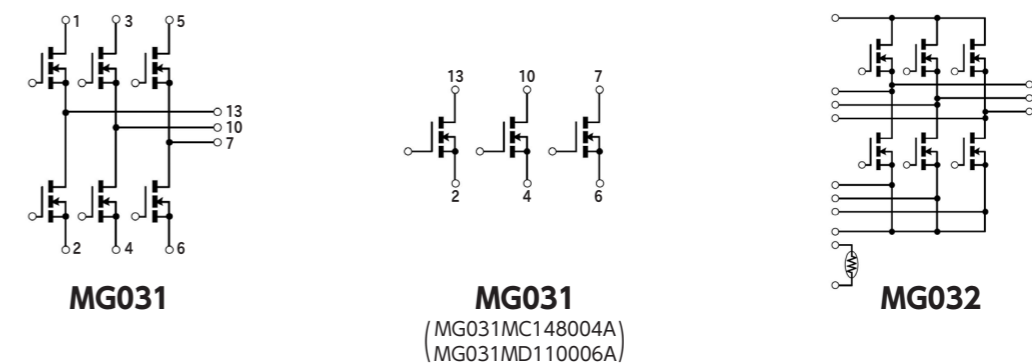





# POWER ICs

## Line up


### IC for LED Lighting

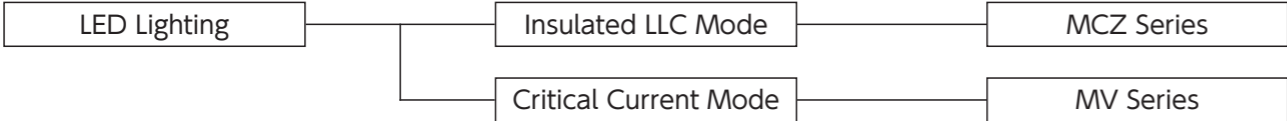

### IC for Power Supply

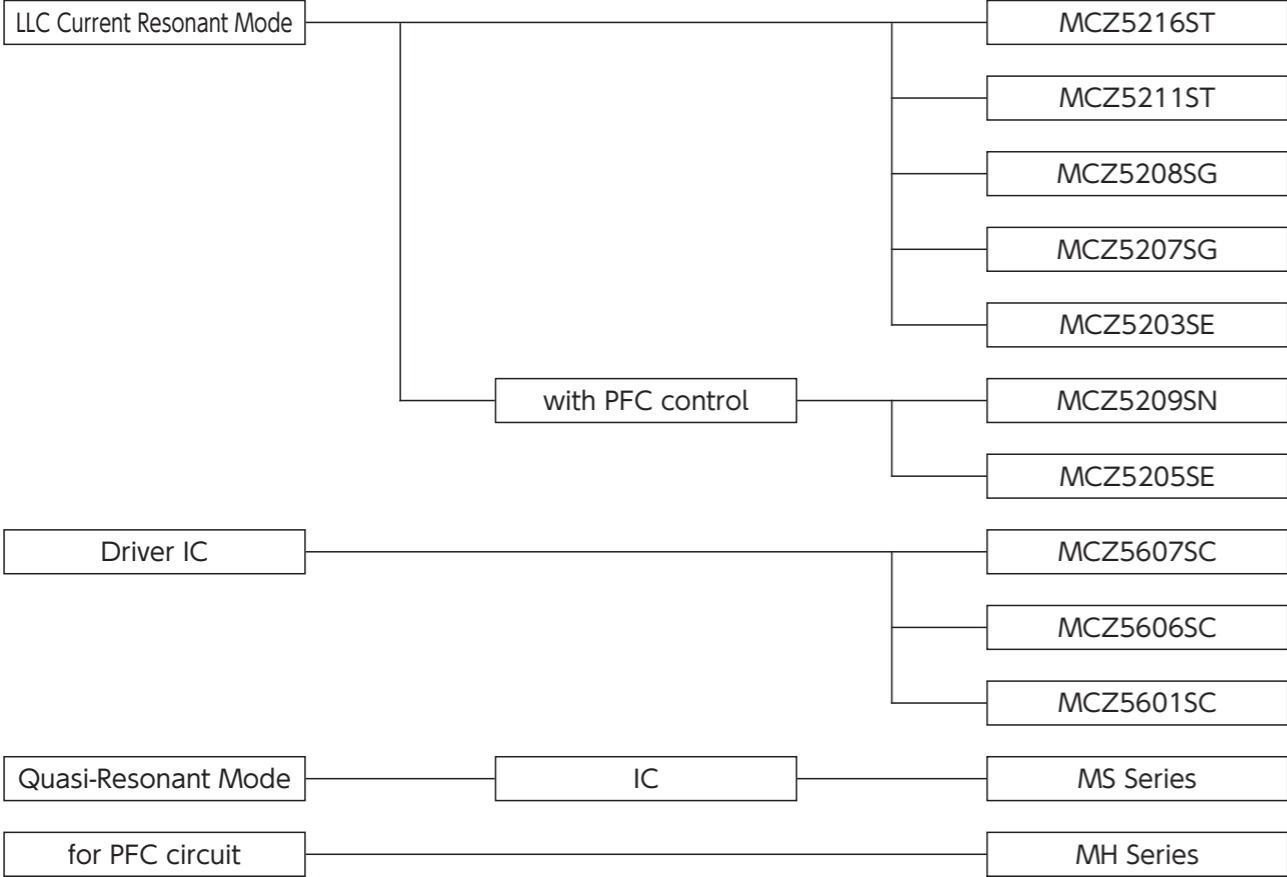

### Ideal Diode IC





## IC for LED Lighting

### Current Mode Power Supply ICs for LED Lighting : MV Series

■ Outline The MV series has a specialized function for LED lighting with PWM & Linear dimming that operates critical current mode without auxiliary winding. On and off width modulation function allows for smooth deep dimming of 1% or less.

## MV Series

Critical Current Mode Power Supply ICs for LED Lighting													
Package		Type No.	HV Startup	Vcc [V]	Output	ON/OFF	Built-in Regulator Voltage [V]	Linear Dimming	PWM Dimming	Halogen free	Automotive		
JEDEC Code JEITA Code House Name	Fig.												
	-	SOP8J	L2	MV1001SC	Yes	9 to 16	1ch	-	-	Yes	Yes	-	-
			MV1002SC	No	-							-	
			MV1011SC	Yes	-							-	
			MV1012SC	No	-							-	
	-	SOP16	L5	MV2002SG	No	10 to 16	2ch	Cont. by REF Voltage	3.3	-	-	-	-
			MV2052SG	No	5				-			-	

# POWER ICs

## IC for Power Supply

### LLC Current Resonant Mode Controller ICs for Bridge Converter : MCZ Series

**Outline** The MCZ series is an advanced symmetric LLC current resonant mode controller for bridge converters. Symmetric LLC resonant converter applications are greatly expanding due to their extremely high efficiency and low noise characteristics.

### High/Low Side Driver IC

**Outline** A driving IC for MOSFET and IGBT power devices. With built-in high-withstand voltage components, it can be used for a variety of uses such as inverter and power supply, etc.

### Low Power Standby Quasi-Resonant Power Supply ICs : MS Series

**Outline** The MS series consumes much less power in standby mode. The ICs incorporate various functions to make it more user-friendly and easier to design a power supply with fewer external components.

### PFC ICs : MH Series







**Outline** The MH series is a PFC circuit control IC which enables multistage interleave. An efficient, high power operation is possible by utilizing a follower IC composed of multistage interleave and a leader IC that can be used alone.

## Ideal Diode IC

### Ideal Diode IC V-Diode™ MF Series



**Outline** This is an ideal diode IC with a built-in reverse connection and reverse current protection it is used for electronic units with batteries as input sources. By using a built-in or a separate MOSFET to control the IC, it allows reducing the size of the circuit board as well as lowering loss and increasing heat dissipation.

## MCZ Series

LLC Current Resonant Mode Controller ICs for Bridge Converter															
Package		Type No.	Type	HV Startup	High-side Drive	Vcc (max) [V]	Vin Sensing	Burst Mode	Maximum Frequency [kHz]	X-cap. discharge	Capacitive Mode Protection	Over Voltage Protection	Over Current Protection	Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.														
	SOP18	MCZ5216ST	LLC Current Resonant Mode	Yes	Yes	35	Yes	Yes	500	Yes	Yes	Latch	Timer Latch	○	-
		★ MCZ5211ST													
		★ MCZ5217ST													
		★ MCZ5218ST													
	SOP24	MCZ5209SN	LLC Current Resonant Mode with PFC Control					Yes	300	No					
	SOP16	MCZ5207SG	LLC Current Resonant Mode	No	Yes	35	Yes	No	500	No	Yes	Latch	Timer Latch	○	-
		MCZ5208SG		No											
	SOP22	MCZ5205SE	LLC Current Resonant Mode with PFC Control	No				No	300	No					
	SOP22	MCZ5203SE	LLC Current Resonant Mode	No				No		No		-			

■ : New product ★ : Under development


### High/Low Side Driver ICs

Package		Type No.	Output	High-side Floating Supply Voltage [V]	Vcc (max) [V]	Input/Output Channel	Vcc_UVLO [V]	VBS_UVLO [V]	Source [mA]	Sink [mA]	Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.											
	SOP8J	MCZ5607SC	High-side/Low-side	622	22	2/2	8.2 to 8.9	8.2 to 8.9	220	450	○	-
		MCZ5606SC		622	22	2/2	8.2 to 8.9	8.2 to 8.9	220	450	○	-
		MCZ5601SC		600	22	2/2	8.2 to 9.0	7.2 to 8.0	400	400	○	-
	SOP14	★ MCZ5613SK	High-side/Low-side	622	22	2/2	10/17.5	10/17.5	2	2	-	-

■ : New product ★ : Under development

## MS Series


### Low Power Standby Quasi-Resonant Power Supply ICs

Package		Type No.	Vin [V]	Vcc [V]	Over Voltage Protection	Over Current Protection	Stand-by Operation	Bottom Skip	Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.									
	SOP8/7J	MS1007SH	95 to 450	11 to 21	Auto restart	Auto restart	Auto Burst Mode	1 skip	○	-
		MS1004SH		11 to 24	Vcc Latch	Timer Latch 2sec. (typ)	Auto Burst Mode/5-Stby Mode	2 skip	-	-
		MS1003SH				1 skip	-	-		

■ : New product

## MH Series



### PFC ICs

Package		Type No.	Type	Operation Mode	Vin Sensing	Vcc [V]	Zero Current Detection	Diodes Short Protection	FB Open Short Protection	Over Voltage Protection	Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.											
	SOP8J	MH2501SC	Critical Current Mode	Leader	Unnecessary	13 to 23	Auxiliary Winding	Yes	Yes	Yes	-	-
		MH2511SC	Synchronizes with Leader IC	Follower		11 to 23	-	No	No	No	-	-
		★ MH2503SC	Critical Current Mode	Leader	Unnecessary	-0.3 ~ 26	No Auxiliary Winding or Auxiliary Winding	Yes	Yes	Yes	-	-
		★ MH2513SC	Synchronizes with Leader IC	Follower	Unnecessary	-0.3 ~ 26	-	Yes	No	Yes	-	-

★ : Under development


## MF Series

### Ideal Diode IC

Package		Type No.	Featured Type	Operating Voltage [V]	Reverse Connection Protection	Reverse Current Prevention	Ron(typ.) [mΩ]	Quiescent Current/Shutdown Supply Current	Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.									
	WSOP8	MF2003SV	Built-in Pch MOSFET	2.5 to 40	Yes	Yes	53	Quiescent Current = 3μA	○	○
		★ MF2013SV	Built-in Pch MOSFET	2.5 to 40	Yes	Yes	15	12	○	○
	TSSOP10	MF2007SW	Driver IC for Separate Nch MOSFET	4.5 to 65	Yes	Yes	-	Shutdown Supply Current = 5μA	○	○
		★ MF2008SW	Driver IC for Separate Nch MOSFET	4.5 to 65	Yes	Yes	-	5	○	○

■ : New product ★ : Under development

### High/Low Side Driver

Package		Type No.	Output	High-side Floating Supply Voltage	Vcc (max)	Input/Output Channel	Vcc_UVLO	VBS_UVLO	Source (typ)[A]	Sink (typ)[A]	Halogen free	Automotive
JEDEC Code JEITA Code House Name	Fig.											
	SOP18	★ MF6001ST	High-side/Low-side	300V	22V	2/2	8.3/8.8	7.6/8.1	4	4	○	○

★ : Under development

# PACKAGE LIST

A	A1 Package:AX057	A2 Package:AX06	A3 Package:AX06	A4 Package:AX078	A5 Package:AX10	A6 Package:AX10		A7 Package:AX14					
B	B1 Package:DO-219AB similar	B2 Package:DO-219AA similar	B3 Package:DO-214AC	B4 Package:DO-214AC	B5 Package:SC-110B	B6 Package:DO-214AA similar		B7 Package:DO-214AA similar	B8 Package:DO-214AA similar	B9 Package:2F	B10 Package:2F	B11 Package:2F	
C	C1 Package:SOPA-4	C4 Package:1N(SMD)	C5 Package:1N(DIP)	C6 Package:1NA(SMD)	C7 Package:1NA(DIP)								
D	D1 Package:D3K	D2 Package:2S	D3 Package:3S	D4 Package:5S	D5 Package:JB	D6 Package:JA		D7 Package:TSB(4pin),JC(4pin)	D8 Package:TSB(5pin),JC(5pin)	D9 Package:JF	D10 Package:JH	D11 Package:D6K	
E	E1 Package:MCP	E2 Package:D30VC	E3 Package:S2VB	E4 Package:S4VB	E5 Package:S5VB	E6 Package:S10VB		E7 Package:S15VB	E8 Package:S25VB	E9 Package:S50VB	E10 Package:S3WB	E11 Package:S10WB	E12 Package:S15WB
	E13 Package:S20WB	E14 Package:SVTA	E15 Package:SVT										




# PACKAGE LIST

F	F1 Package:Module	F2 Package:Module	F3 Package:Module	F4 Package:MG001	F5 Package:MG031	F6 Package:MG032		F7 Package:MG038	F8 Package:MG048	F9 Package:MG060	F10 Package:MG061	F12 Package:MG073	F13 Package:MG074
G	G1 Package:SC-63 <small>ESpack</small>	G2 Package:TO-252AA <small>ES</small>	G3 Package:TO-252AB similar <small>ES</small>	G4 Package:TO-277A similar <small>ES</small>	G5 Package:TO-252AA similar <small>ES</small>	G6 Package:LA		G7 Package:MO-235B similar <small>LE</small>	G8 Package:MO-235B <small>LE_Dual</small>	G9 Package:MO-299B <small>LS(TOUL)</small>	G10 Package:MO-299B <small>LS(Ketiv Source)</small>		
H	H1 Package:SC-83 similar <small>STO-220</small>	H2 Package:SC-83 similar <small>ES</small>	H6 Package:TO-263AB <small>EZ</small>	H7 Package:TO-263-SC <small>FZ-2p</small>	H8 Package:TO-263-7pin <small>GF</small>								
J	J1 Package:SC-91A <small>FTO-220(2pin)</small>	J2 Package:SC-91 <small>FTO-220A(2pin)</small>	J3 Package:SC-91 <small>FTO-220AG(2pin)</small>	J4 Package:SC-91 <small>FTO-220G(2pin)</small>	J6 Package:SC-91A <small>FTO-220(3pin)</small>	J7 Package:SC-91 <small>FTO-220A(3pin)</small>		J8 Package:SC-91 <small>FTO-220AG(3pin)</small>	J9 Package:SC-91 <small>FTO-220G(3pin)</small>				
K	K2 Package:TO-247AD <small>MTO-3P(2pin)</small>	K4 Package:TO-247AD <small>MTO-3P(3pin)</small>	K5 Package:TO-247AD <small>MTO-3P(3pin)</small>	K6 Package:TO-247AD <small>MTO-3Pv</small>	K7 Package:TO-247AD <small>MTO-3Pv</small>	K8 Package:TO-247AD <small>GC</small>							
L	L1 Package:SOP8	L2 Package:SOP8J	L3 Package:SOP8/7J	L5 Package:SOP16	L6 Package:SOP18	L7 Package:SOP22		L8 Package:SOP24	L9 Package:WSON8	L10 Package:TSSOP10	L11 Package:SOP14		










PACKAGE LIST

# OUTLINE DIMENSIONS

[Unit:mm]

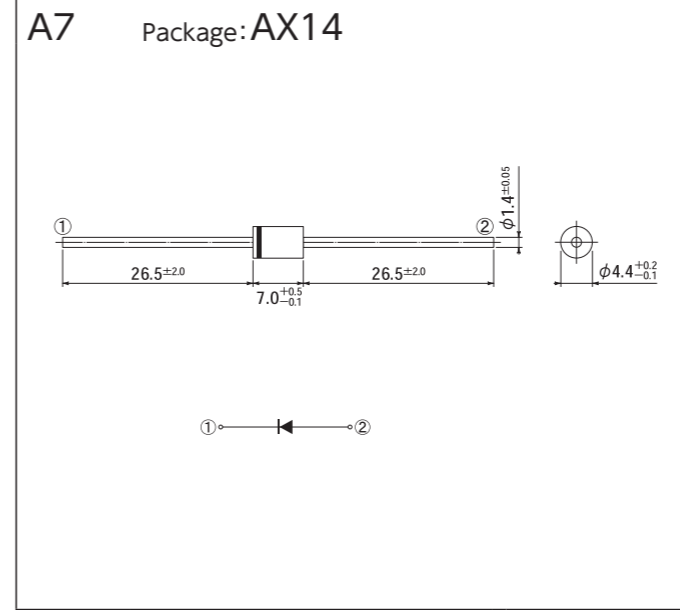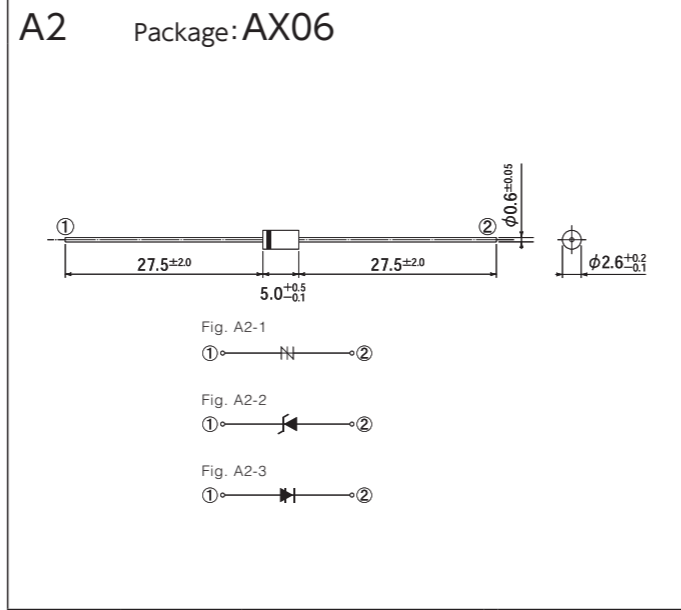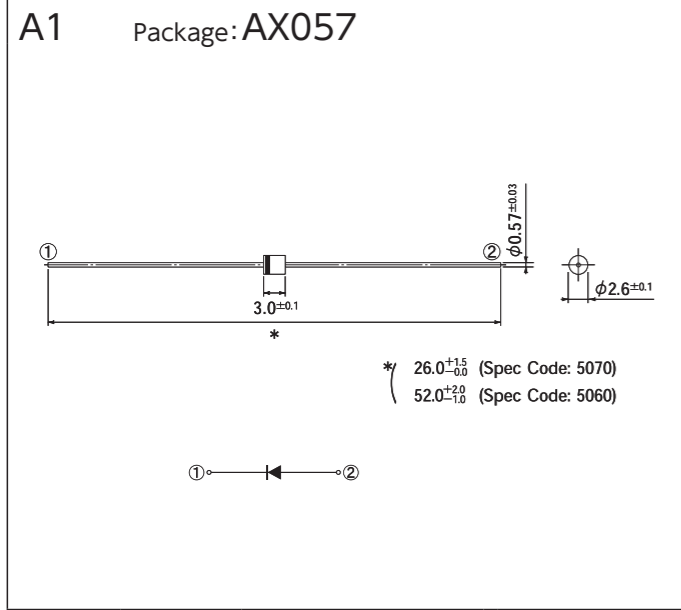












[Unit:mm]

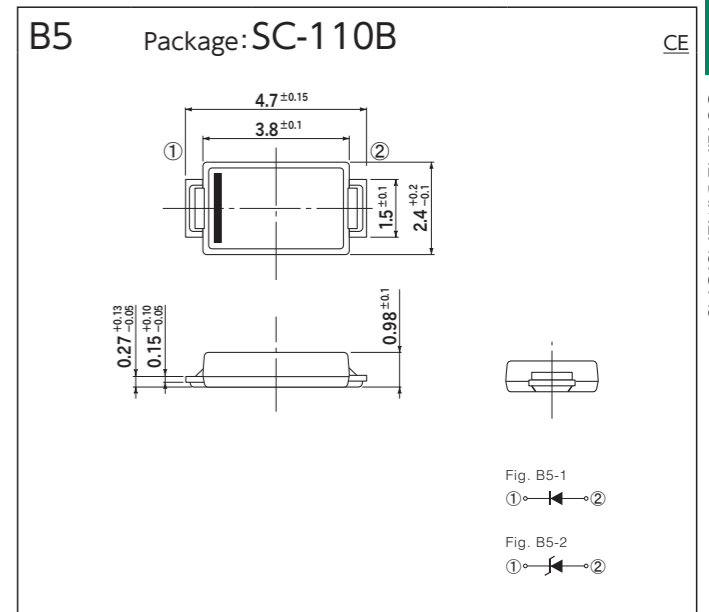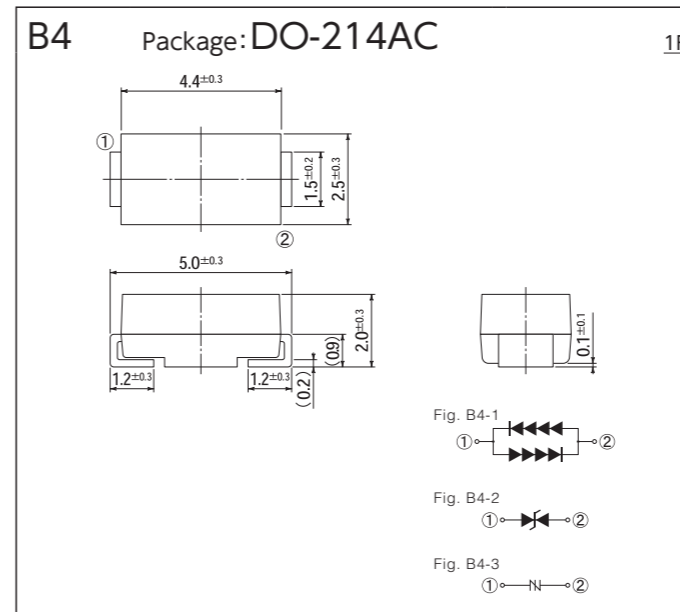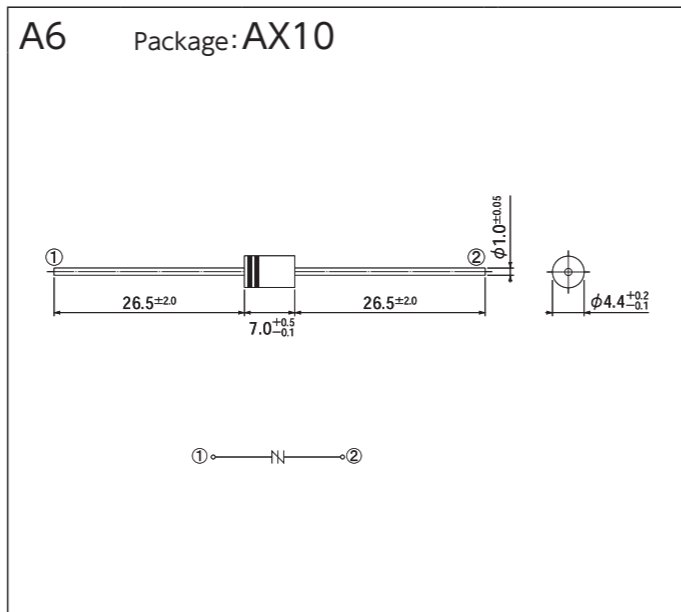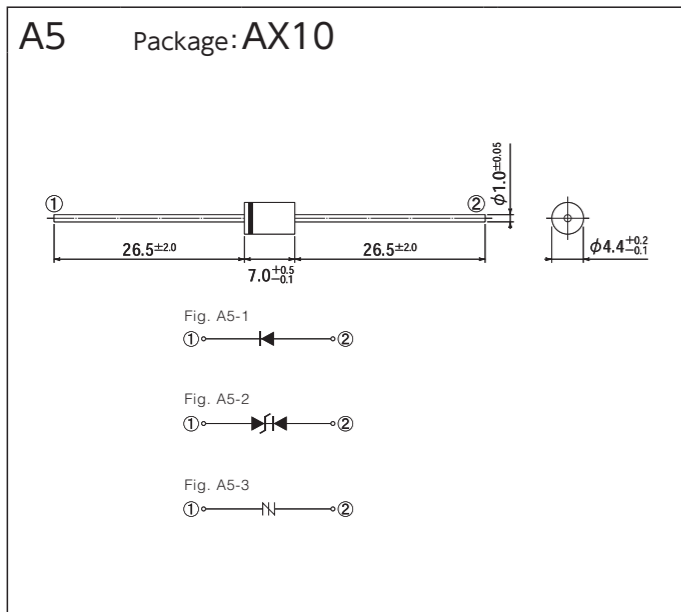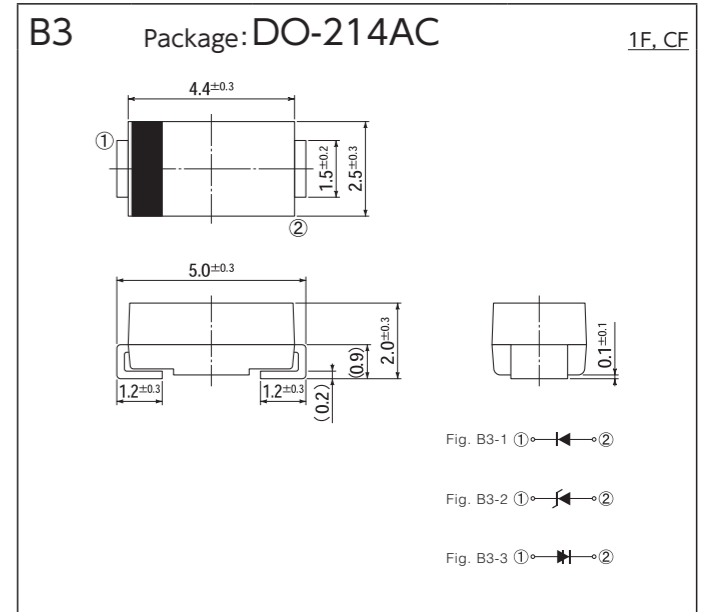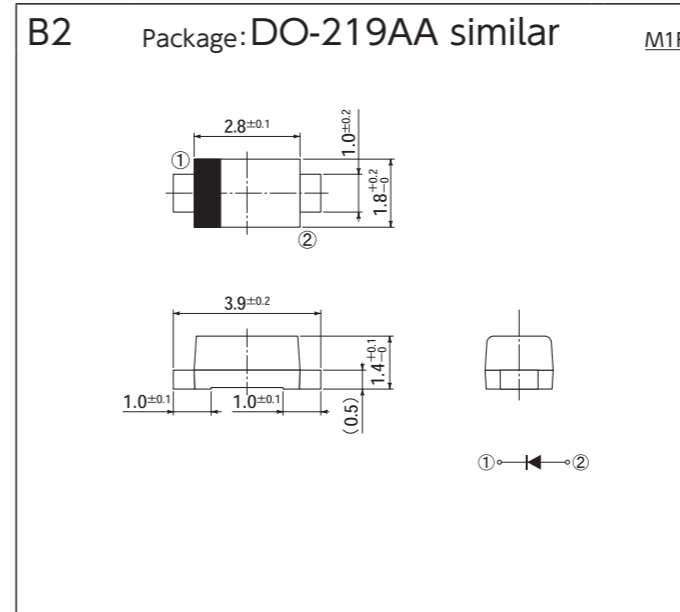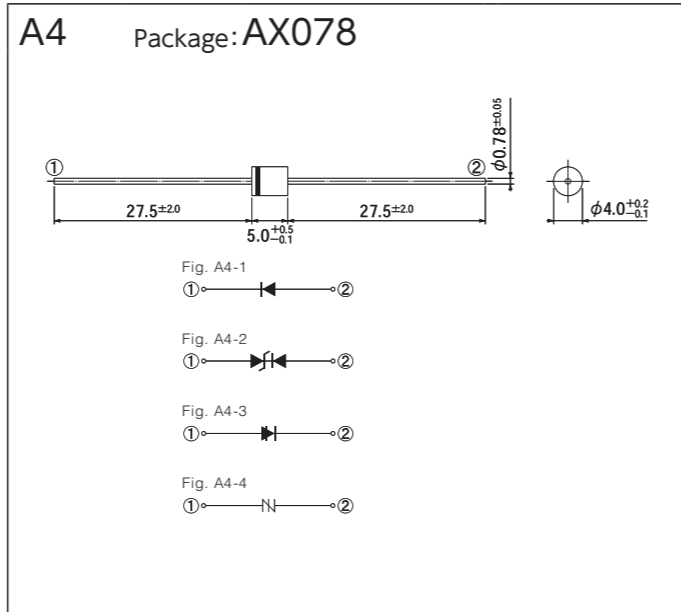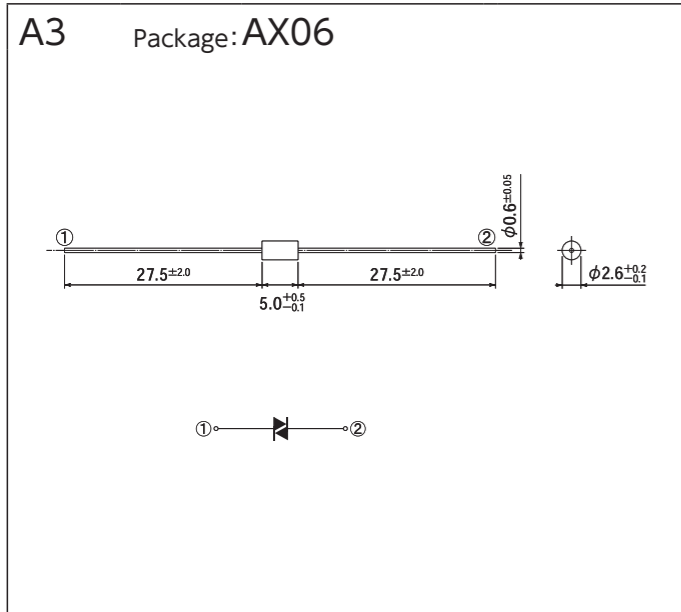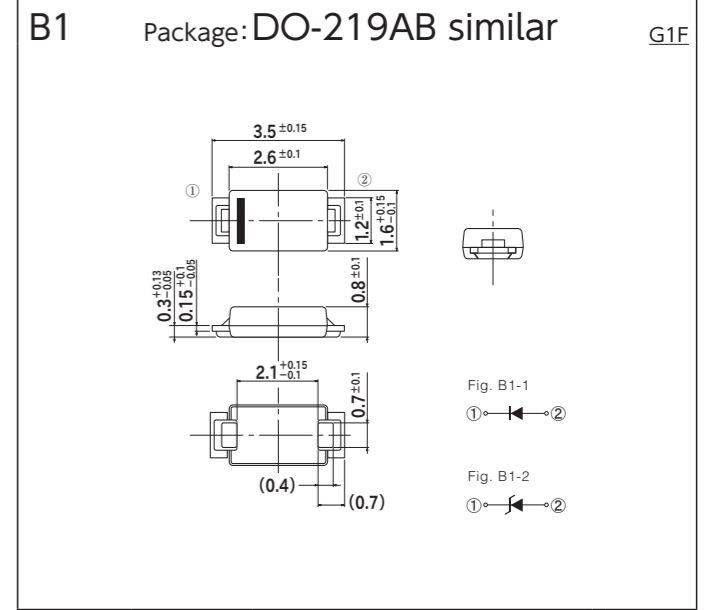

OUTLINE DIMENSIONS

# OUTLINE DIMENSIONS












[Unit:mm]

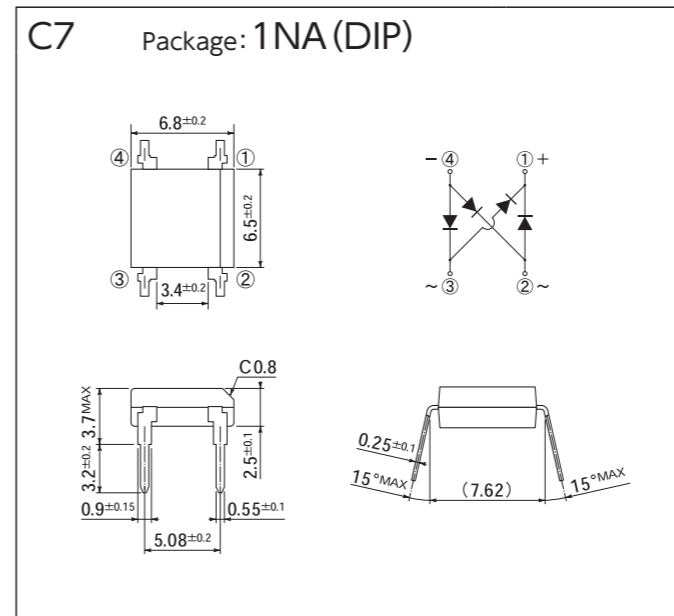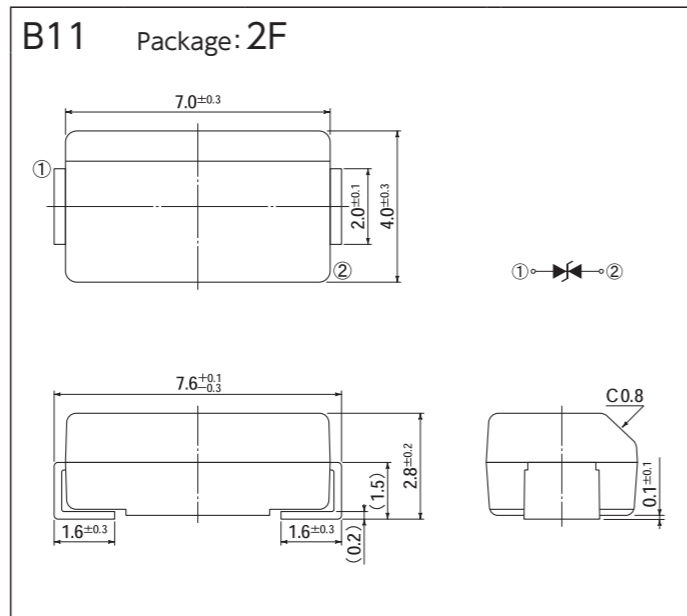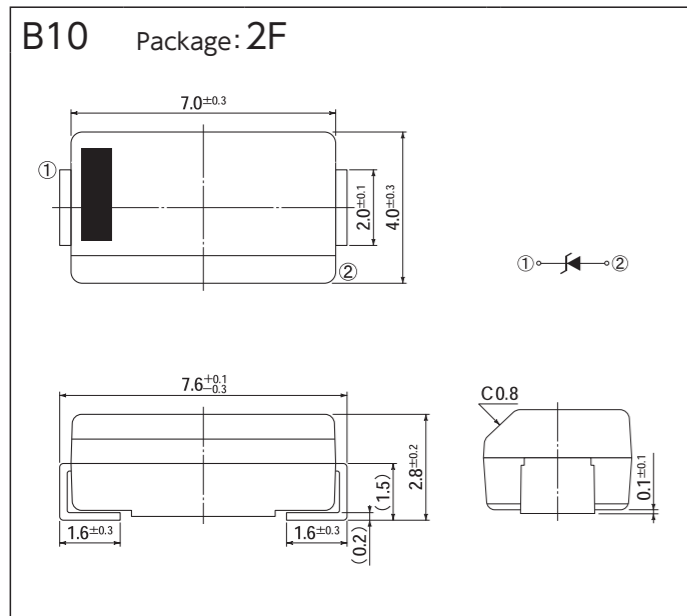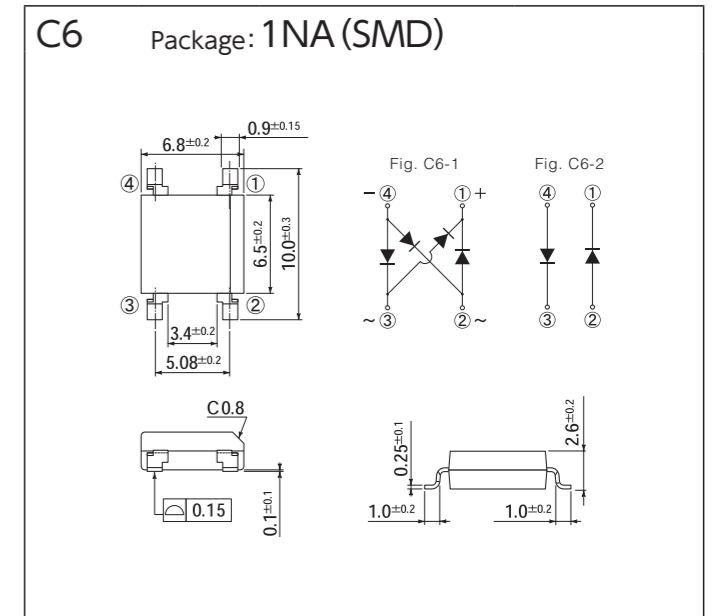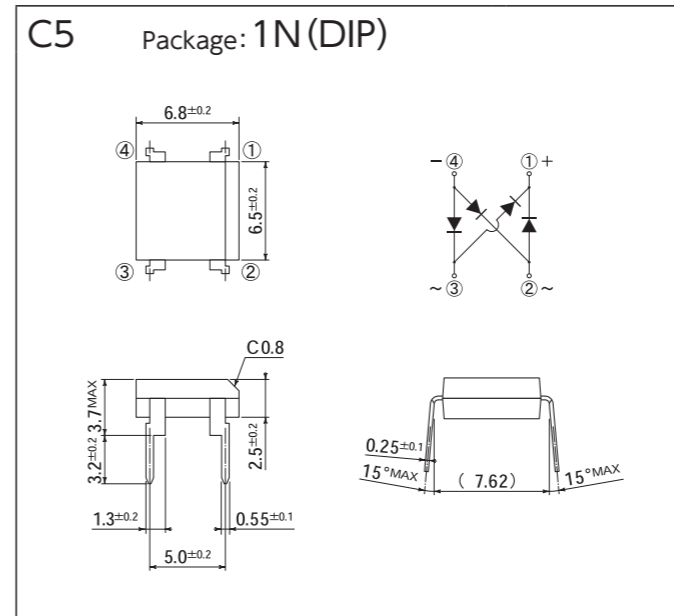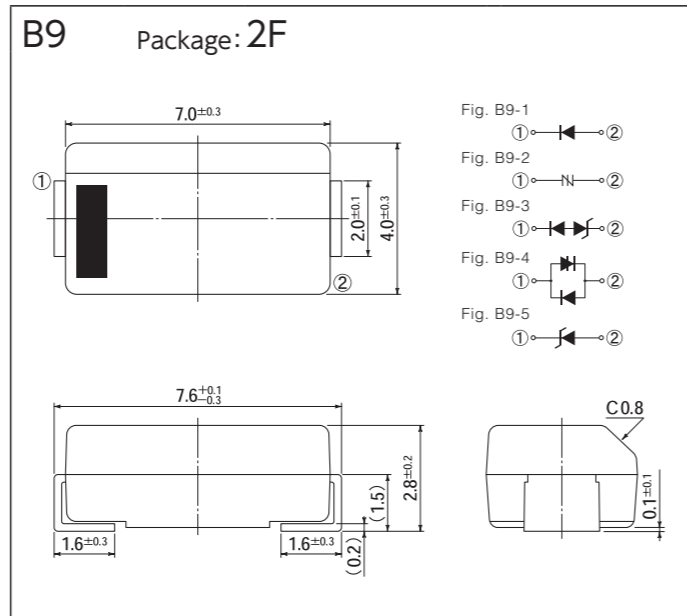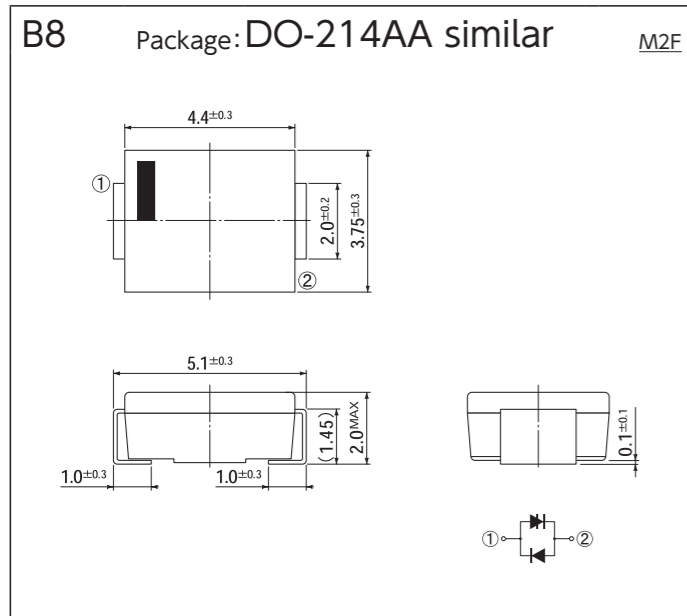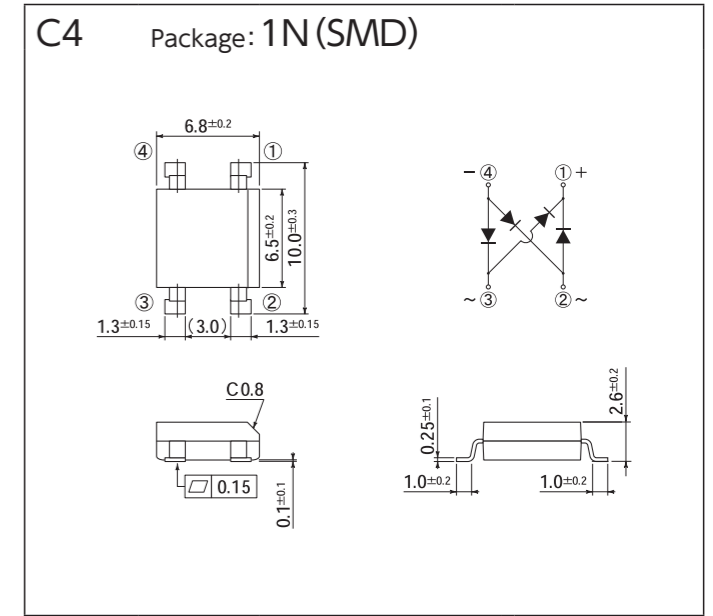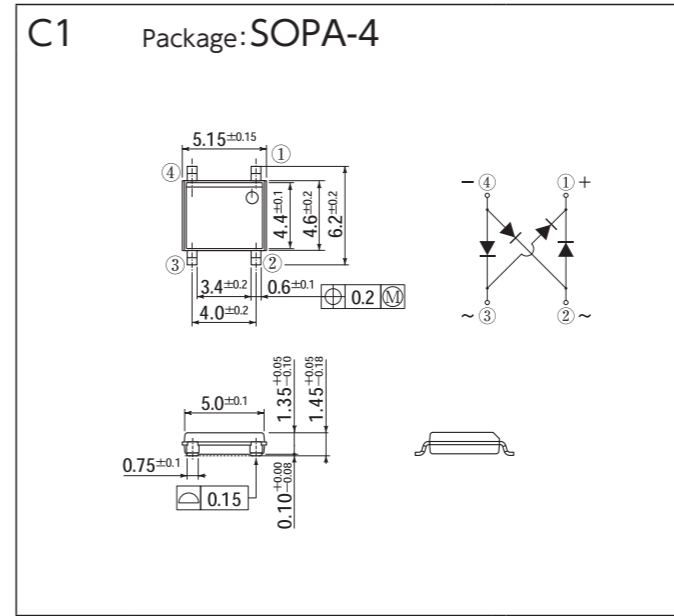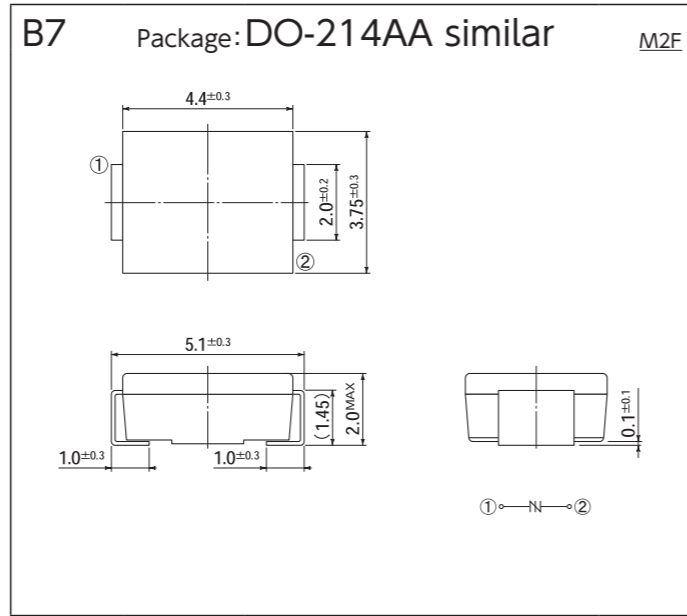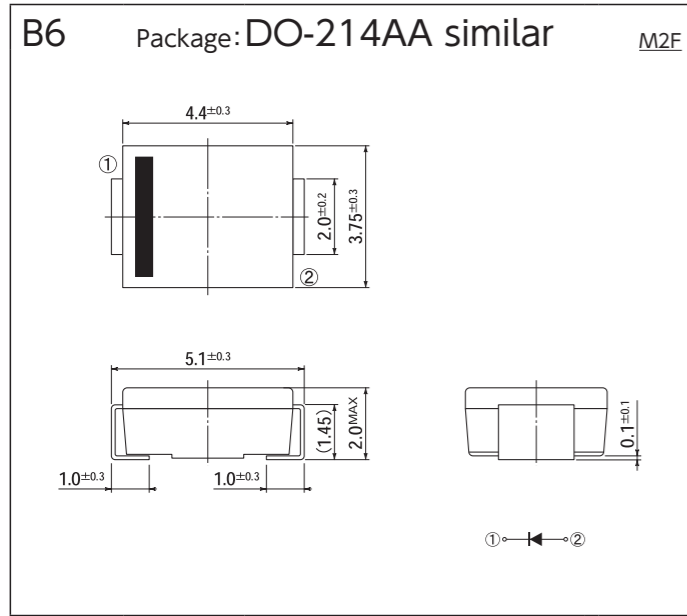

OUTLINE DIMENSIONS

# OUTLINE DIMENSIONS





[Unit:mm]

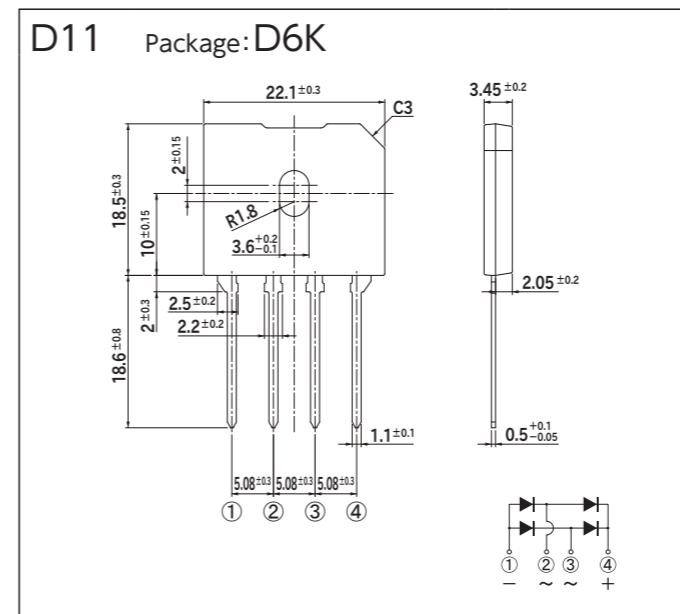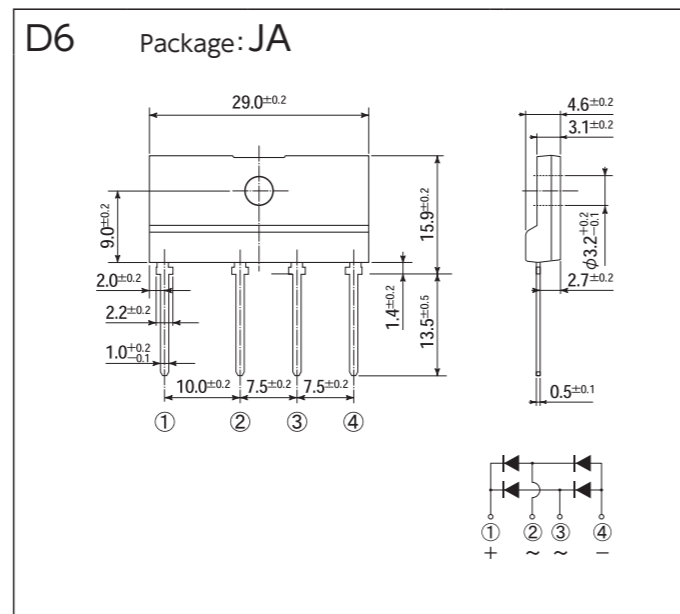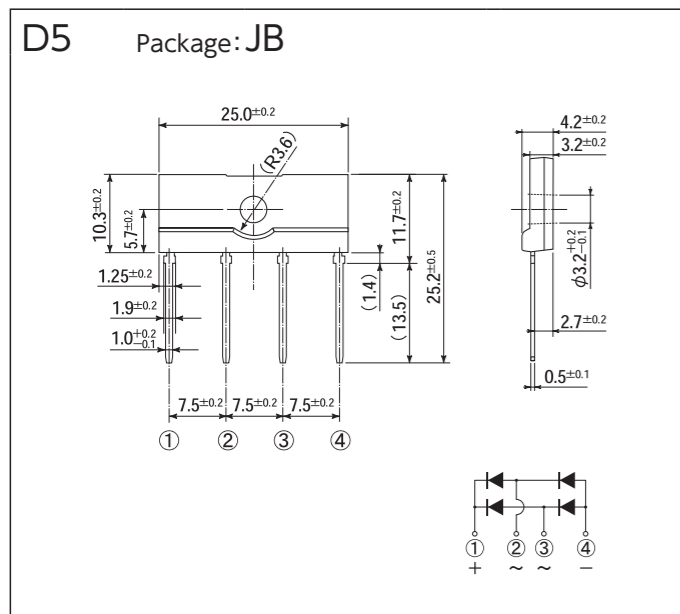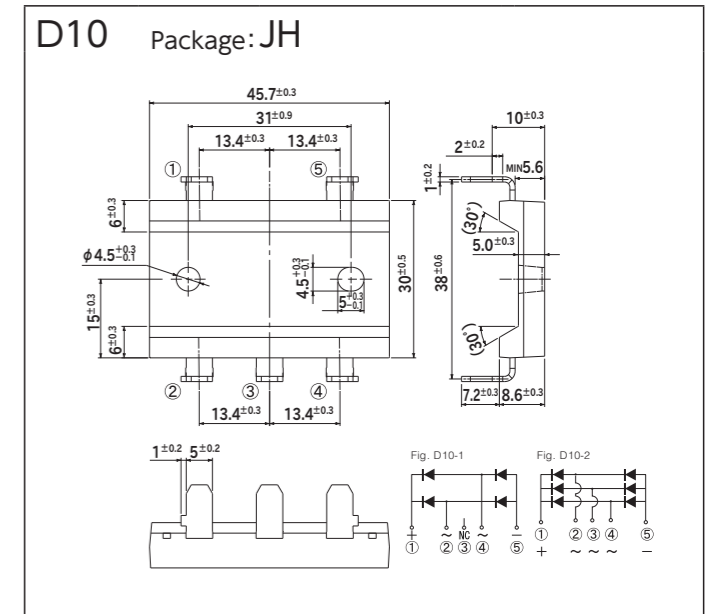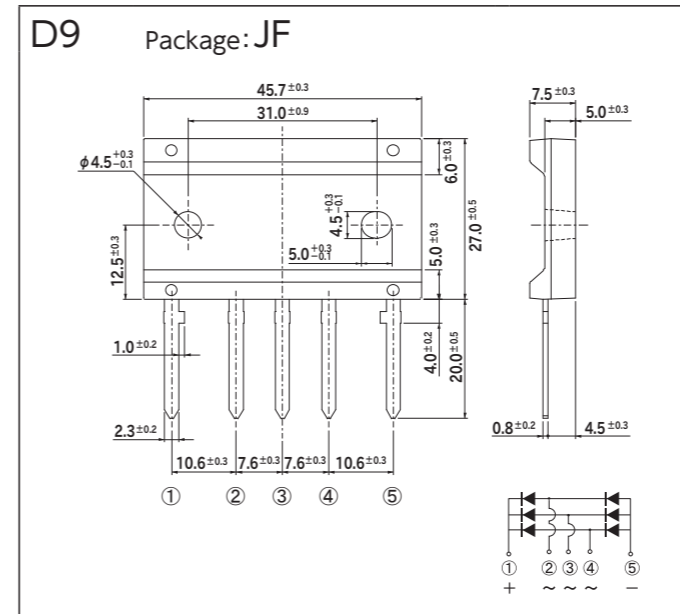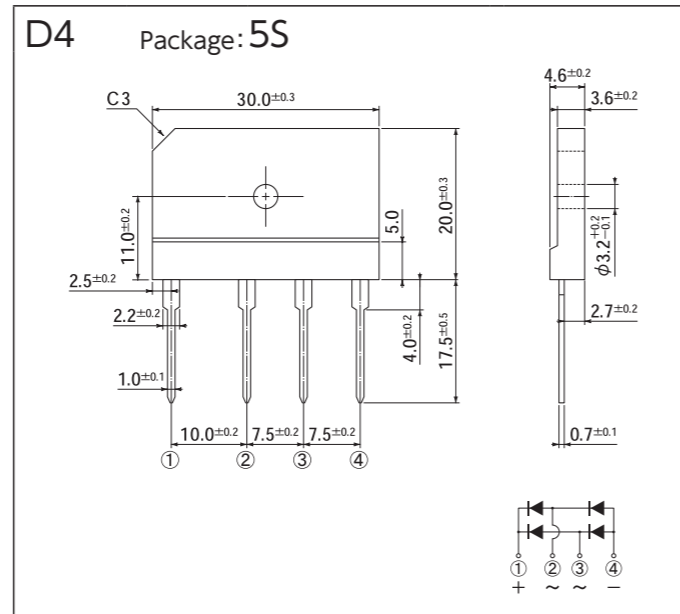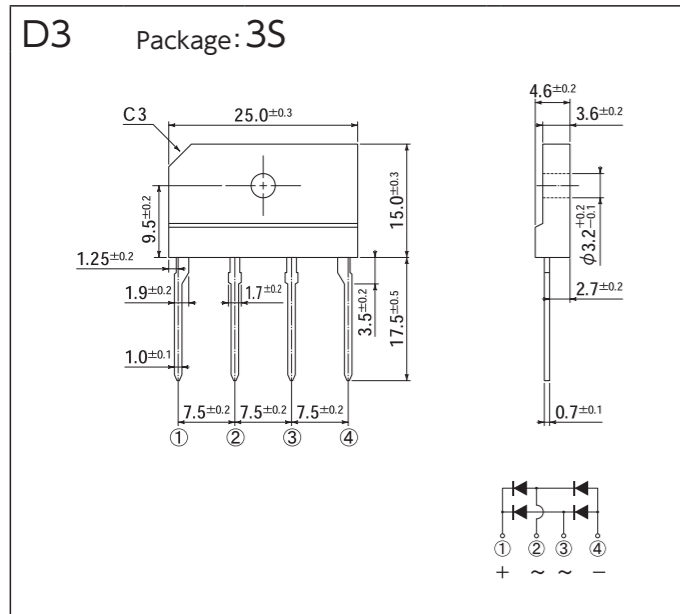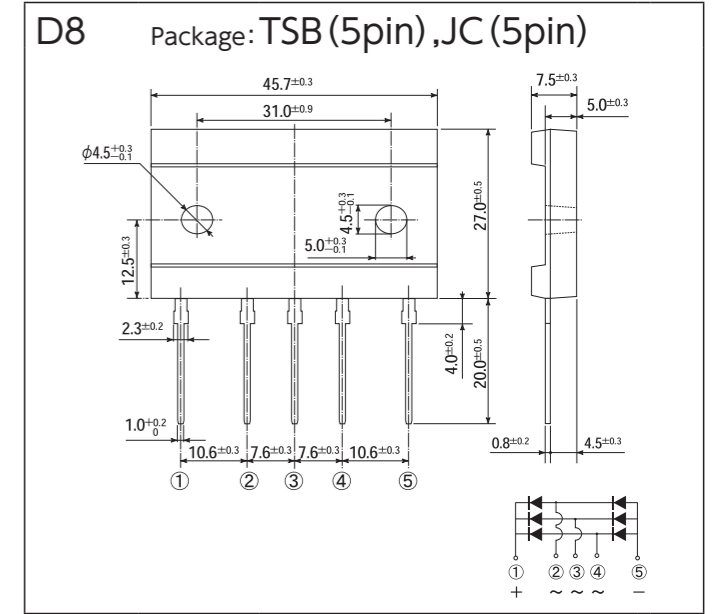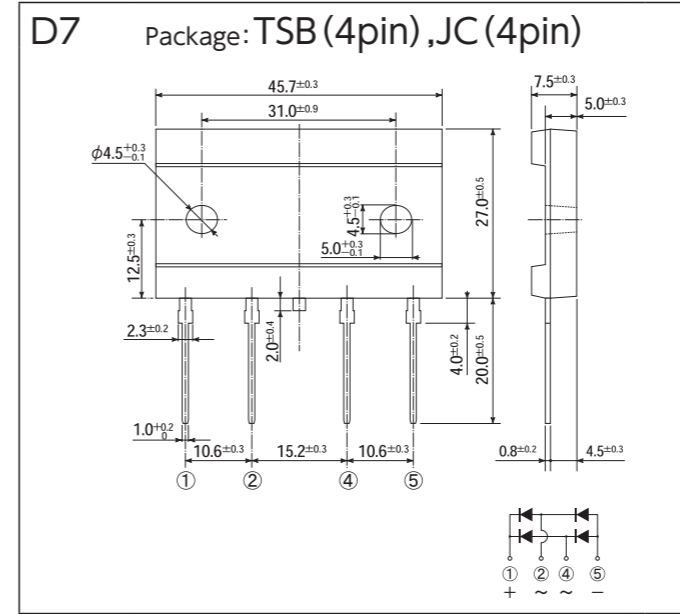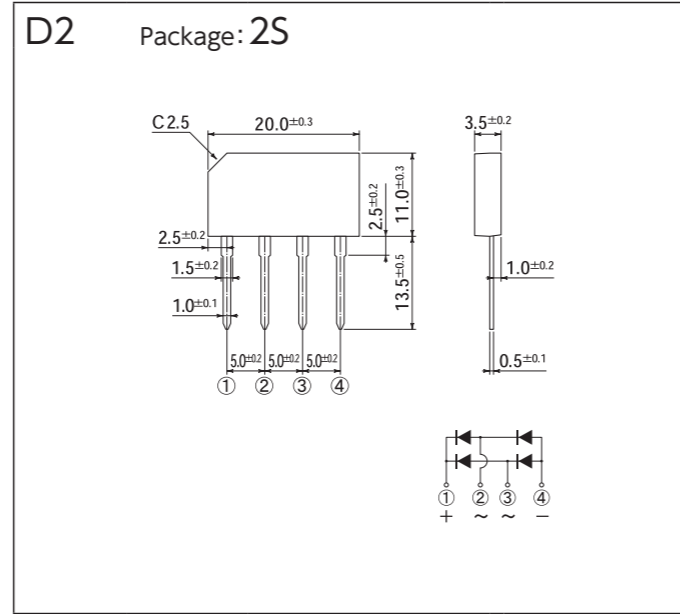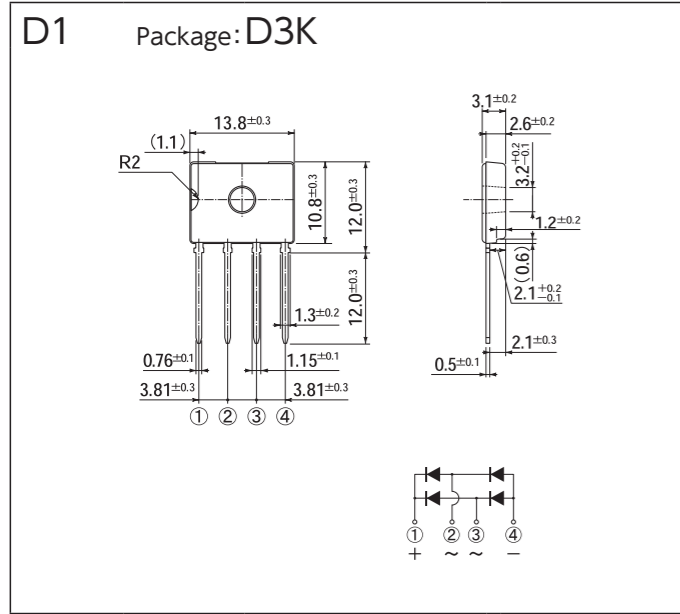









OUTLINE DIMENSIONS

# OUTLINE DIMENSIONS

[Unit:mm]

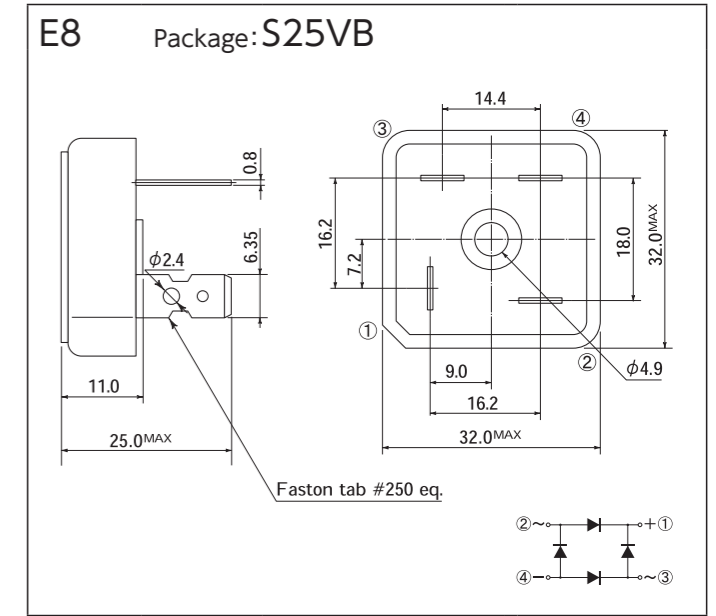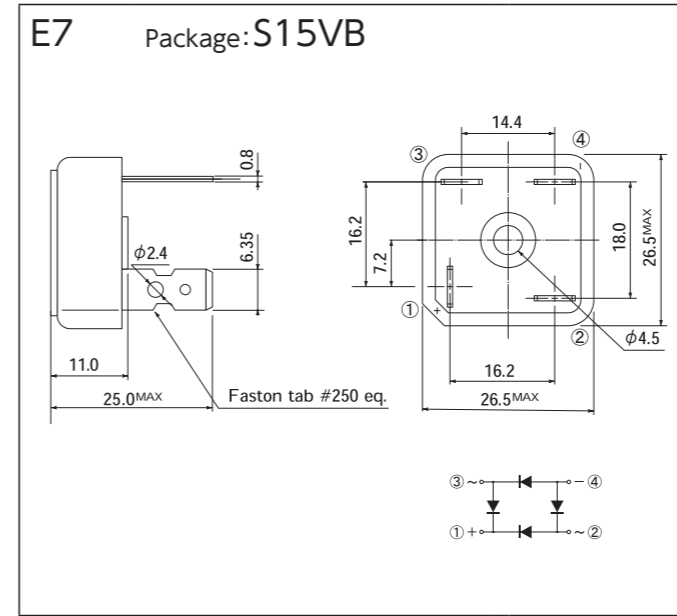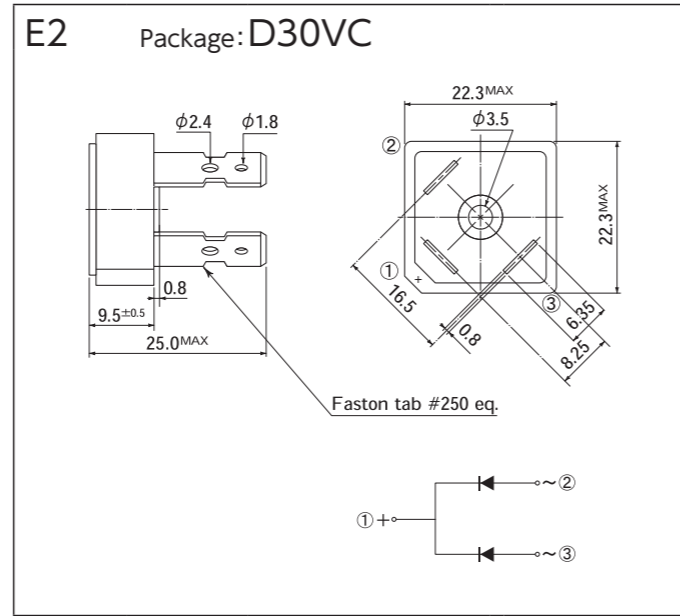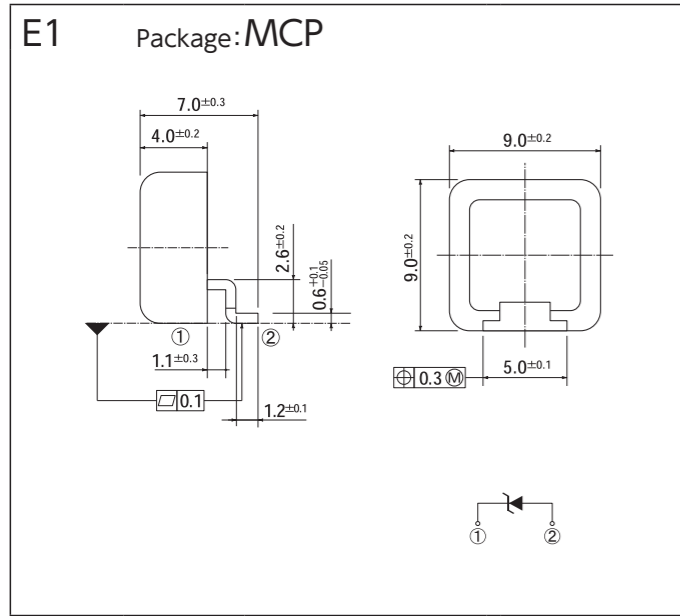

[Unit:mm]

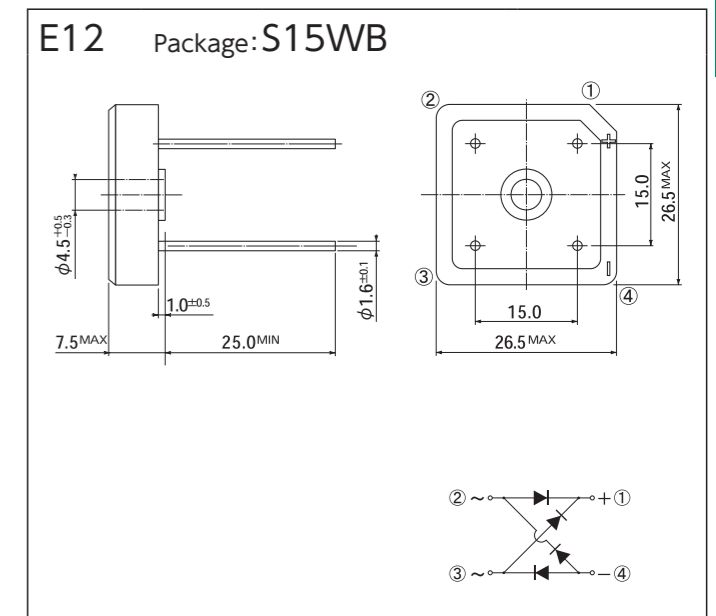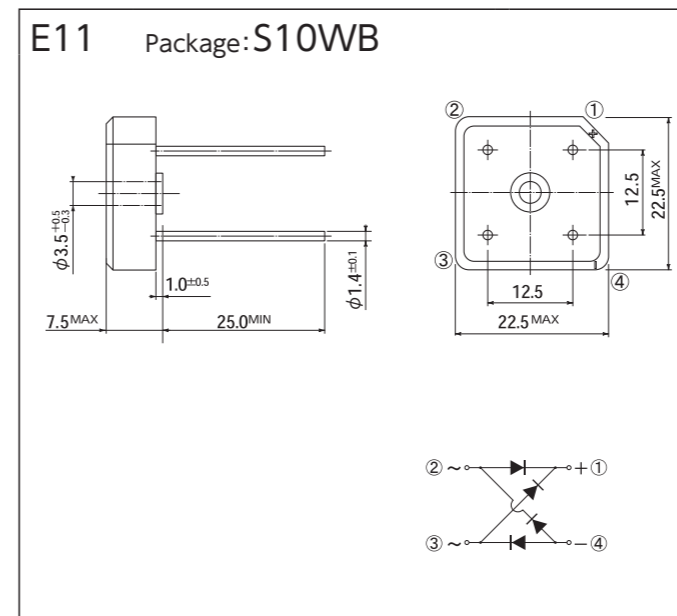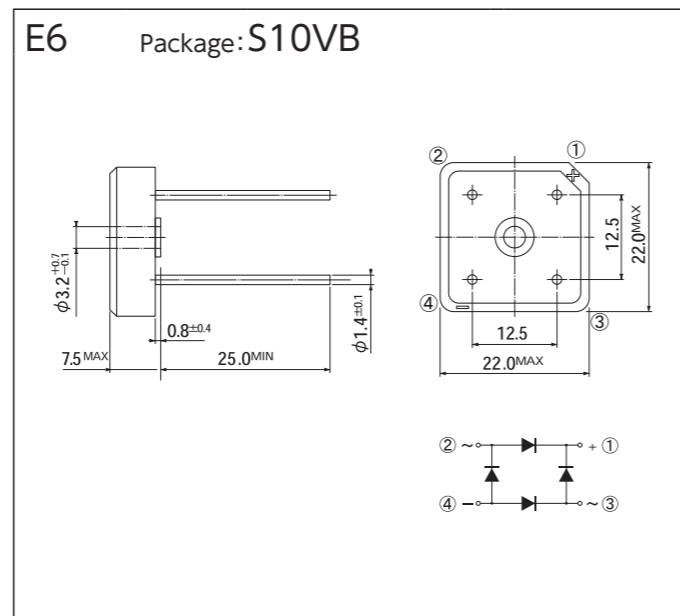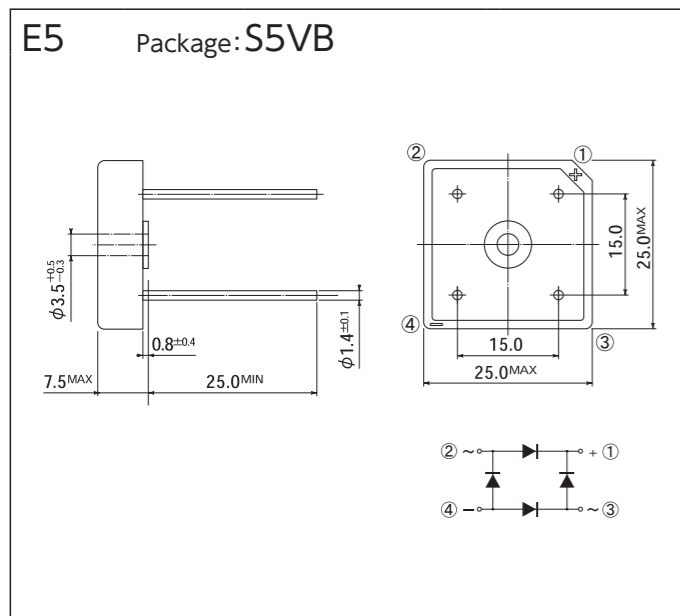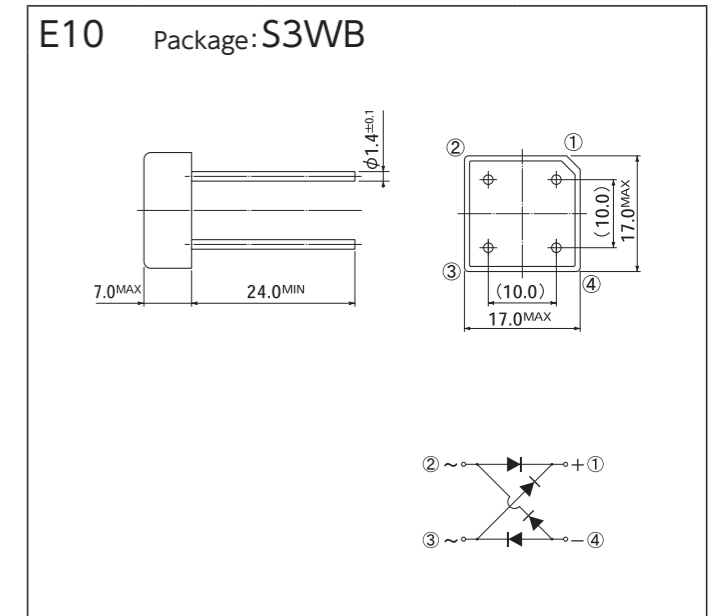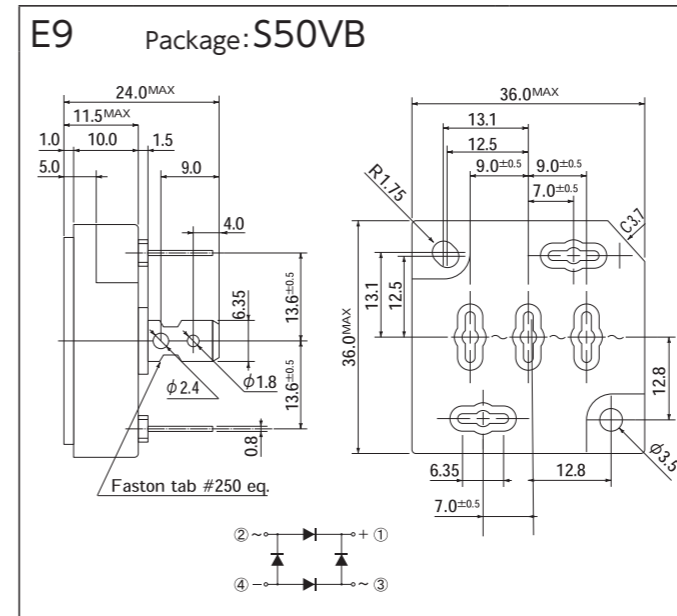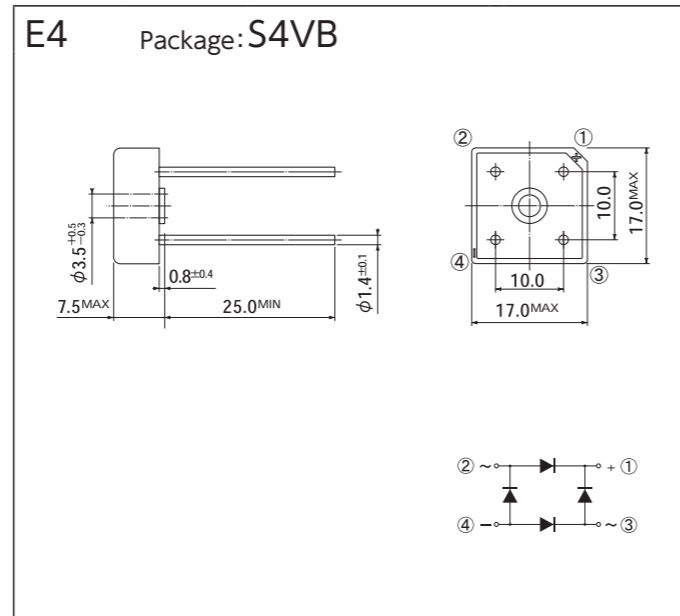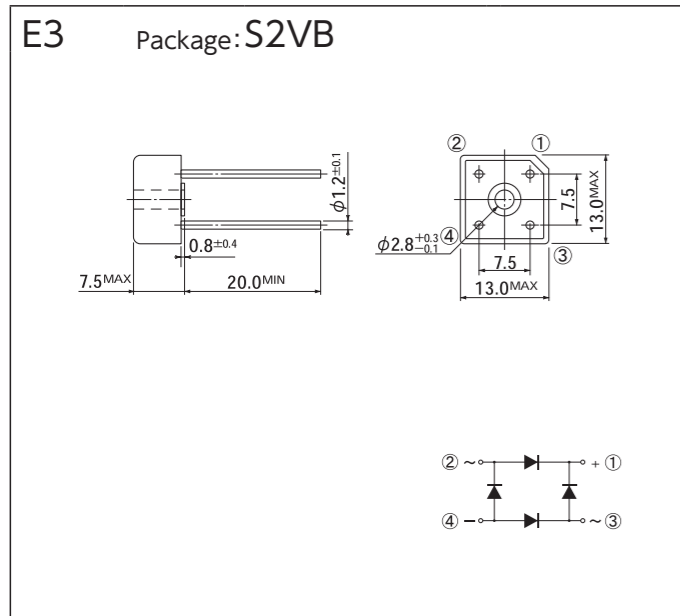


OUTLINE DIMENSIONS




# OUTLINE DIMENSIONS

[Unit:mm]


E13 Package: S20WB

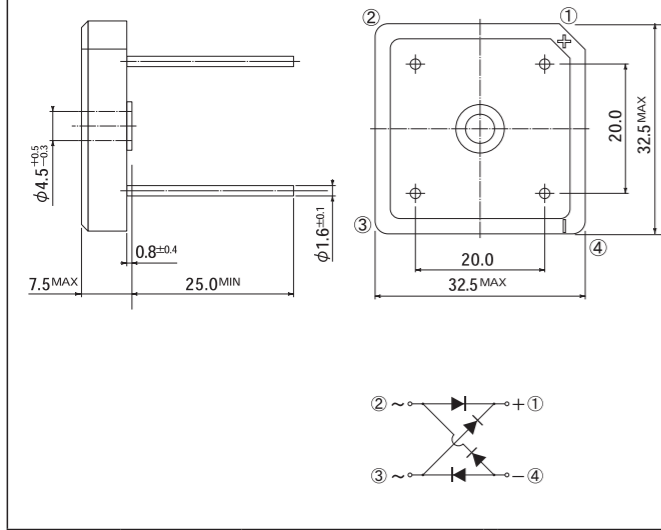


E14 Package: SVTA

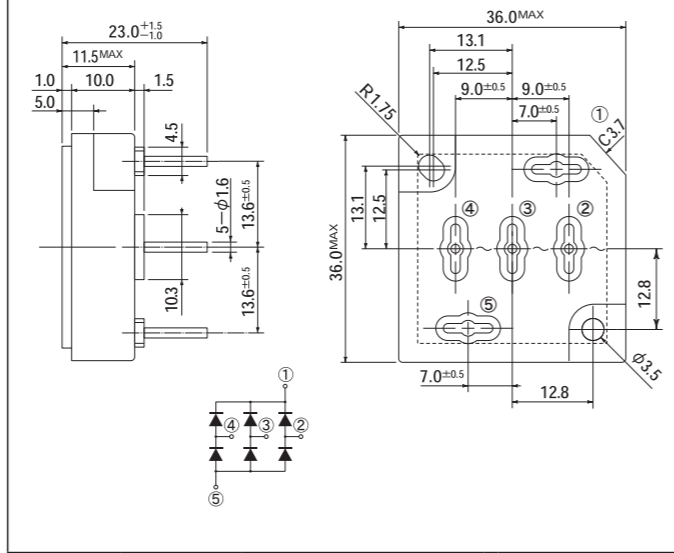


F4 Package: MG001

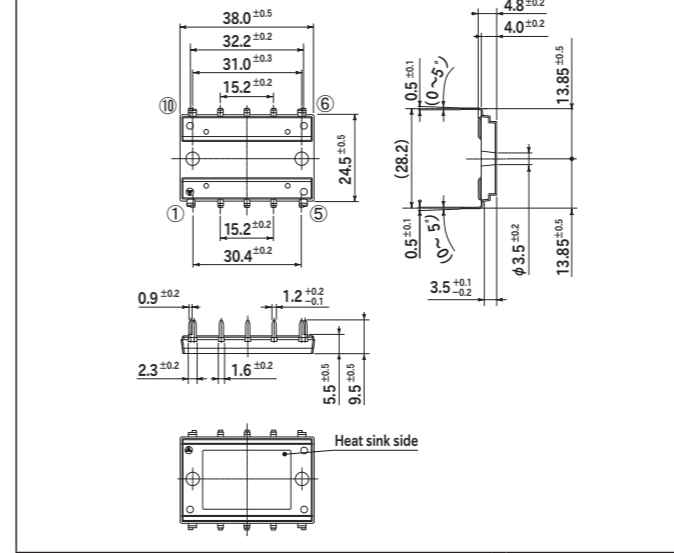


F5 Package: MG031

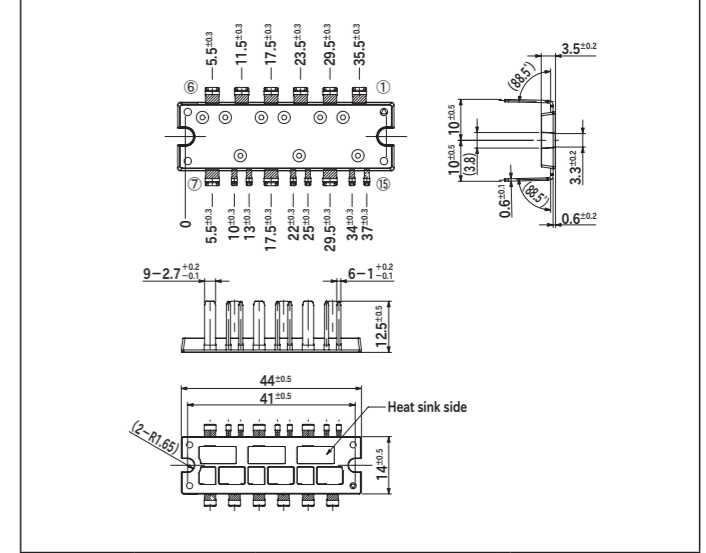


E15 Package: SVT

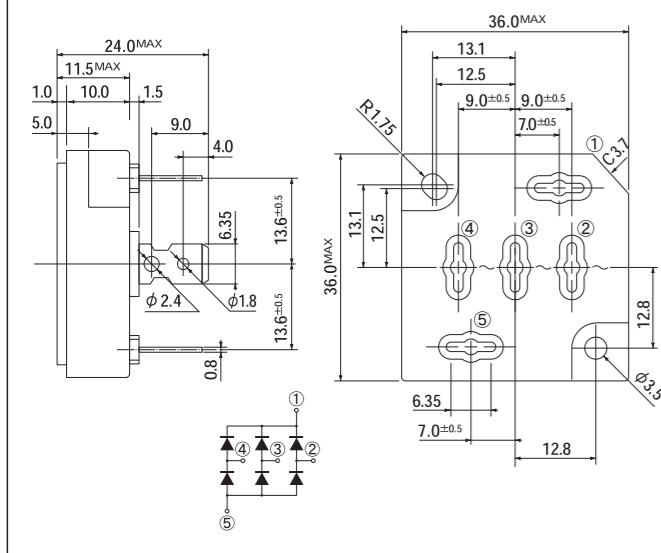


F1 Package: Module

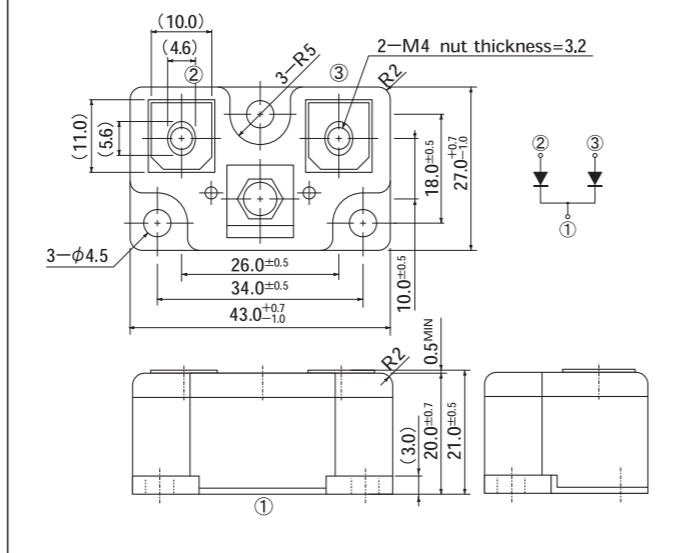


F6 Package: MG032

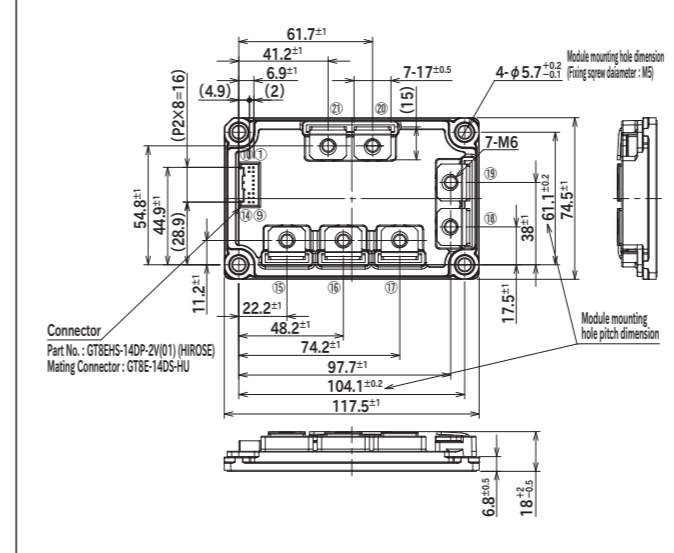


F7 Package: MG038

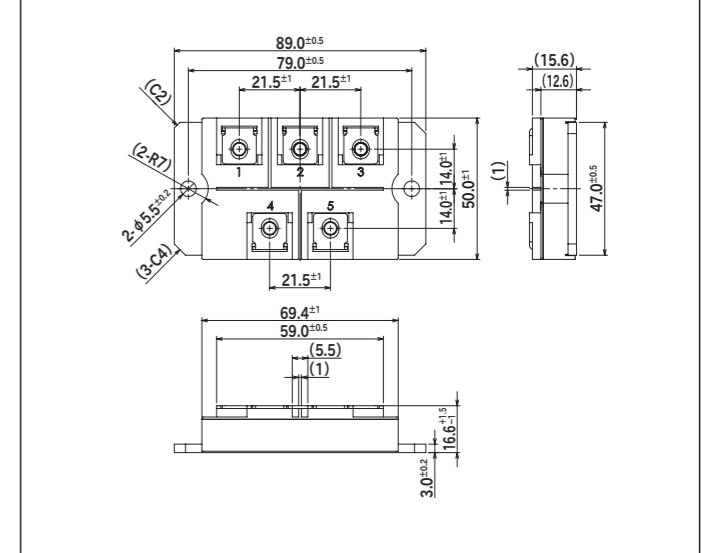


F2 Package: Module

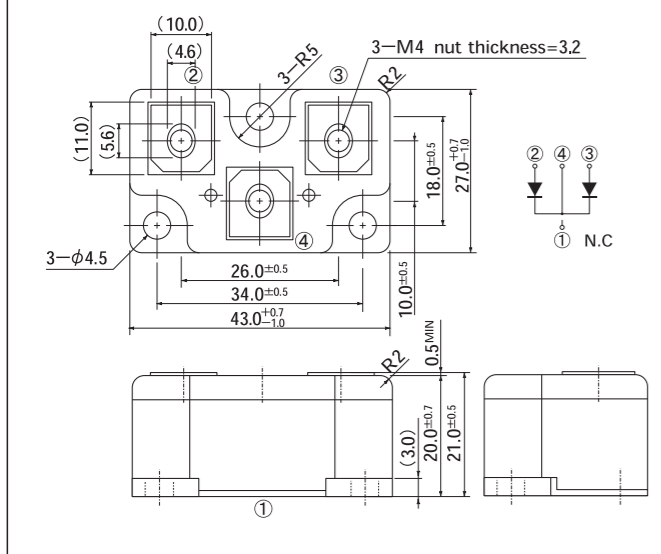


F3 Package: Module

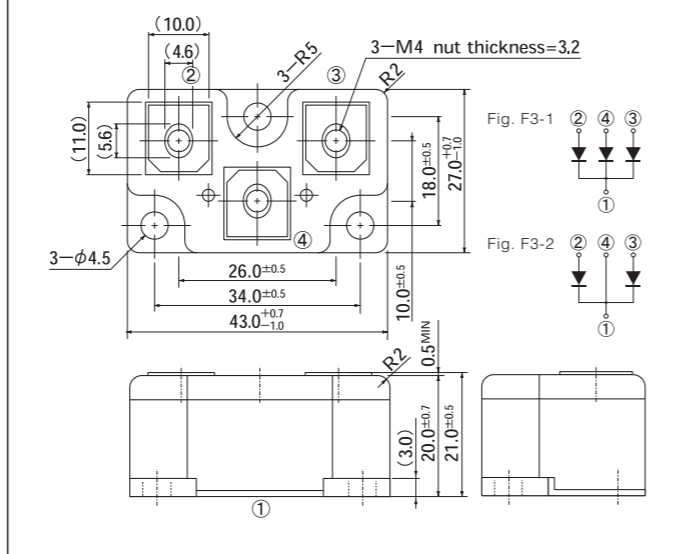

F8 Package: MG048



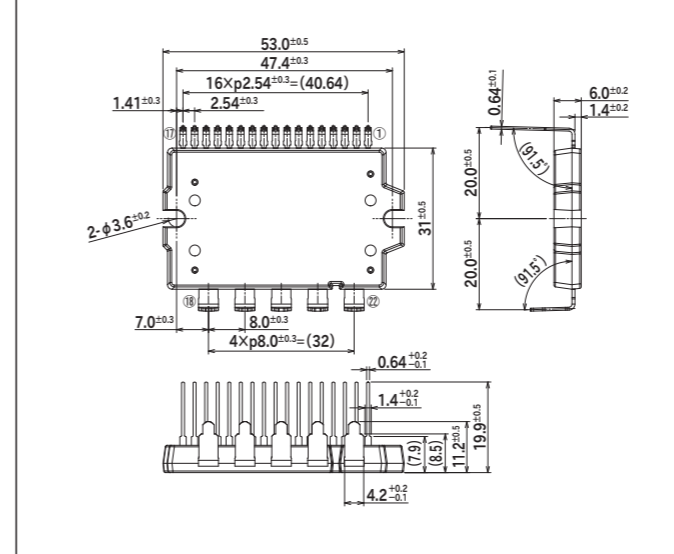


F9 Package: MG060






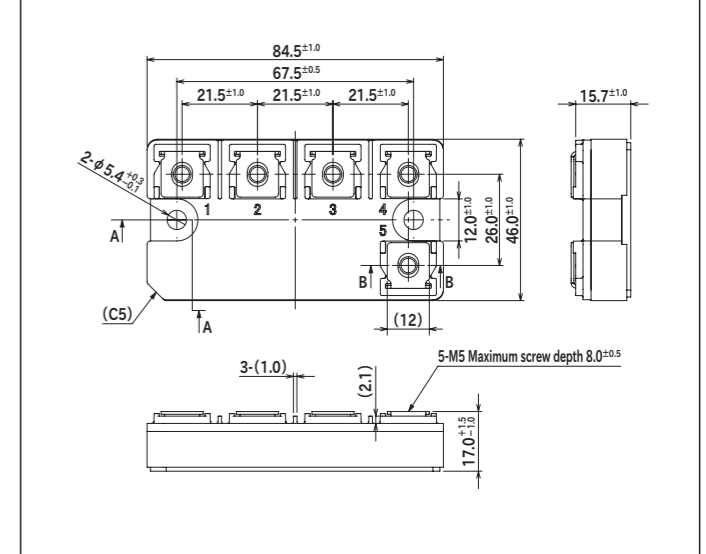


# OUTLINE DIMENSIONS

[Unit:mm]

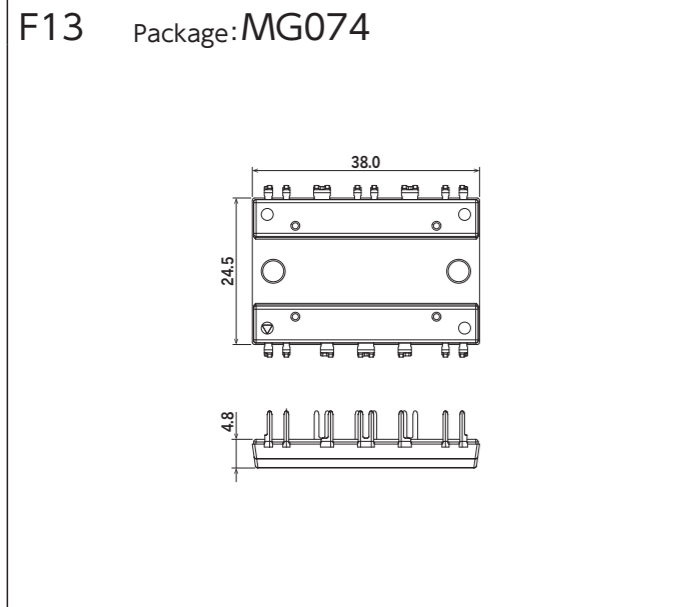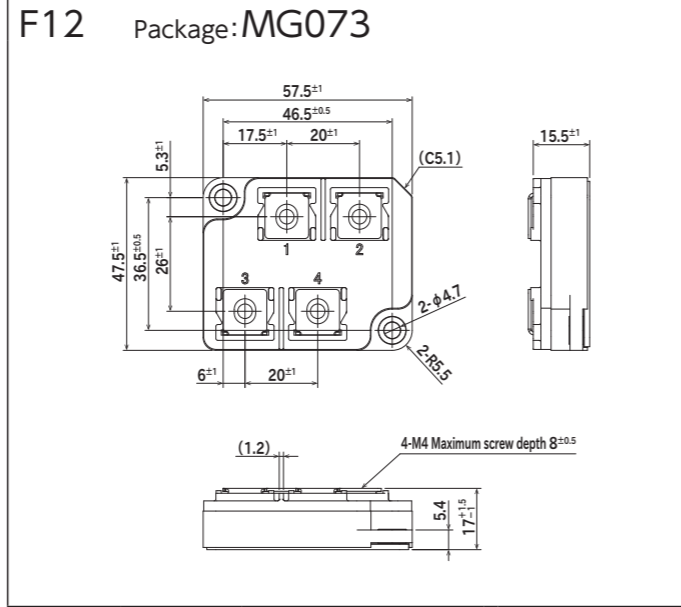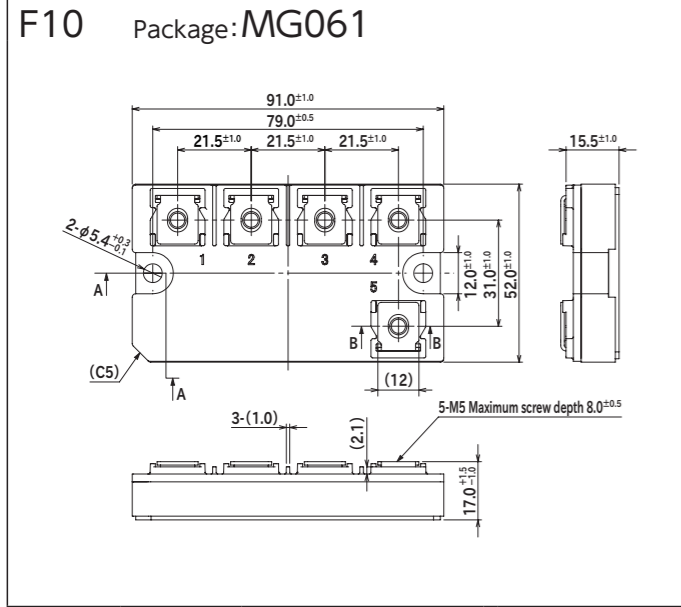



[Unit:mm]

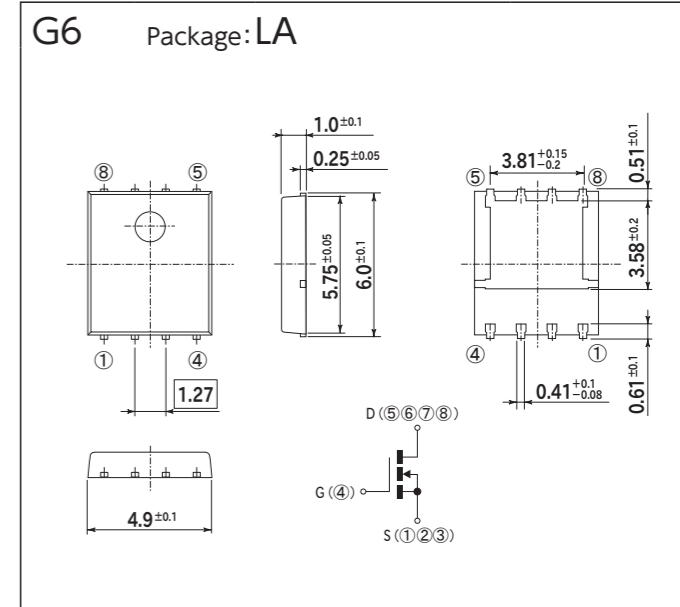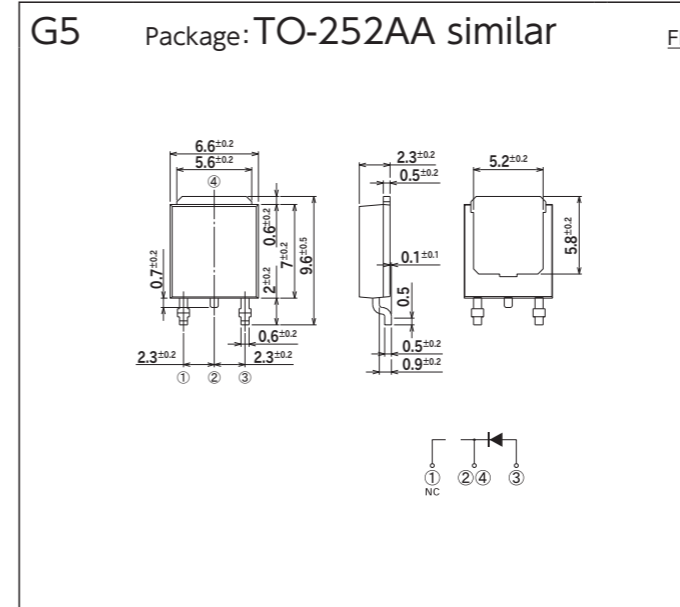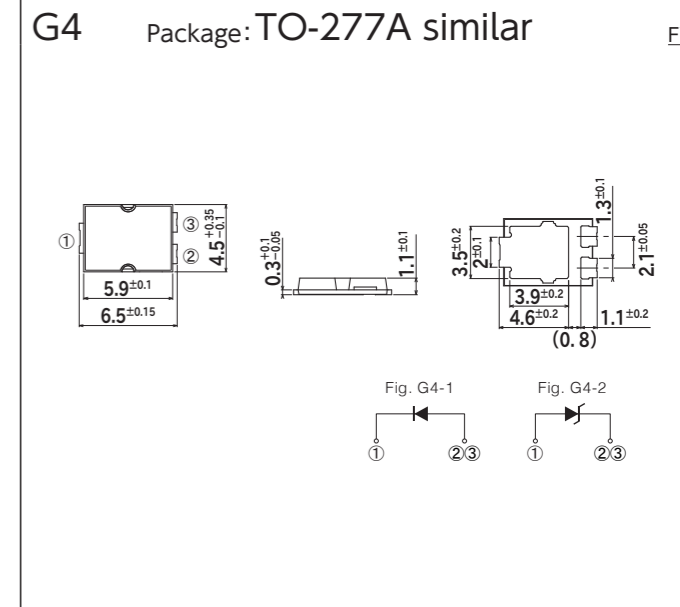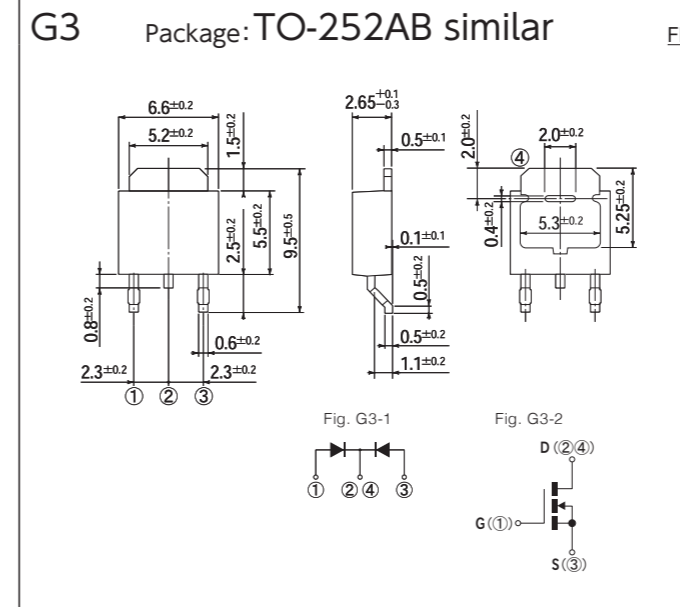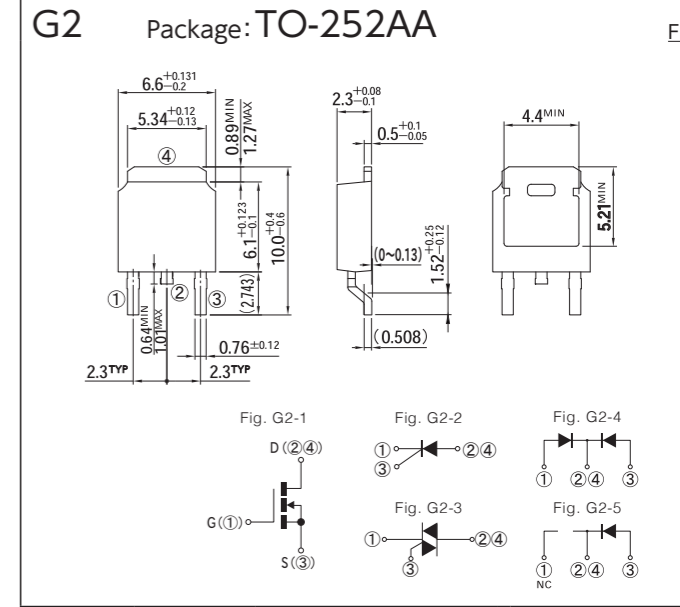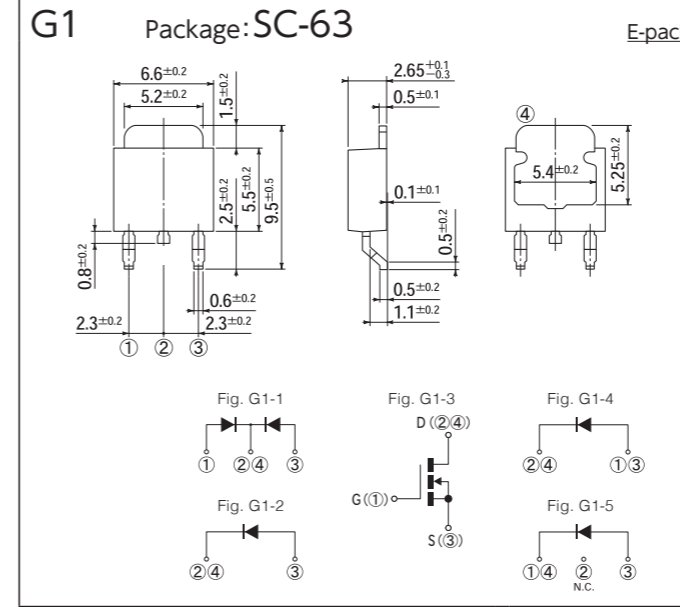











OUTLINE DIMENSIONS

# OUTLINE DIMENSIONS

[Unit:mm]

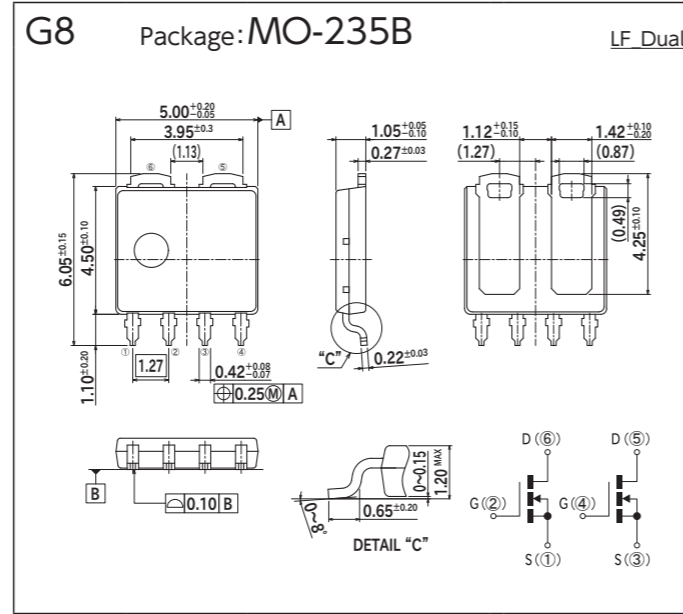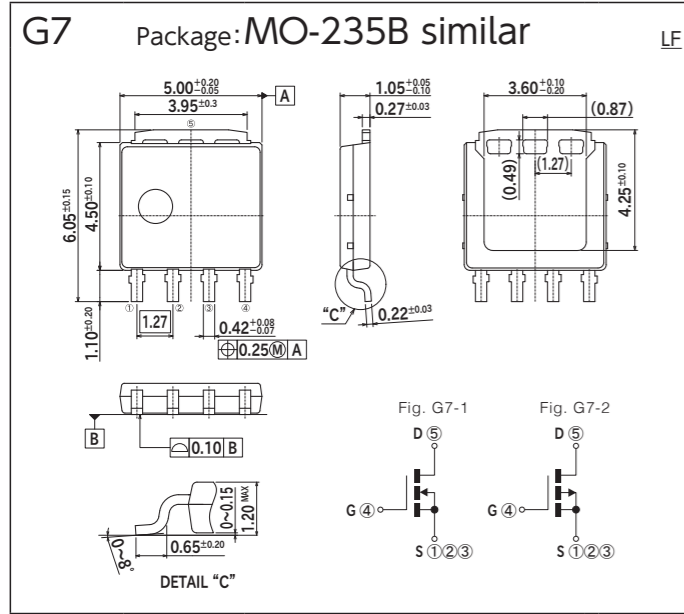












[Unit:mm]

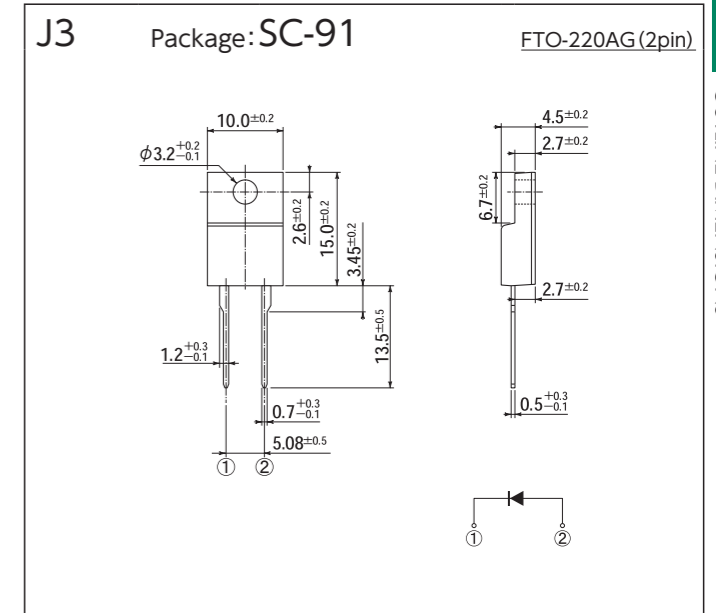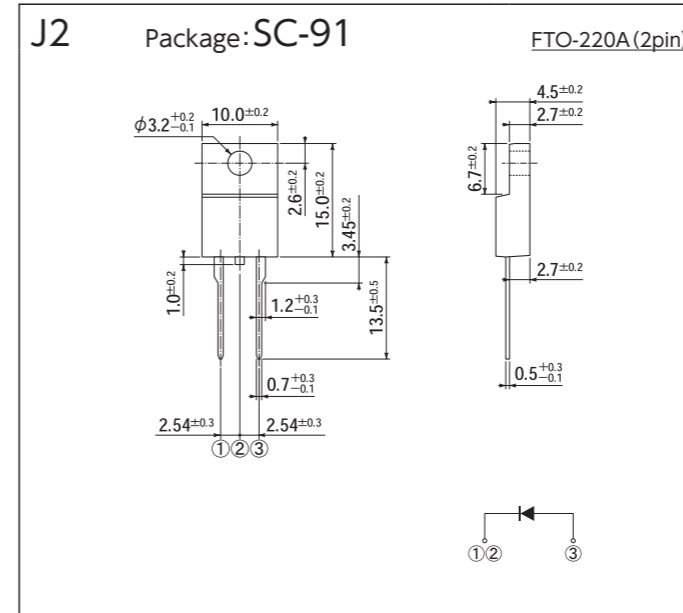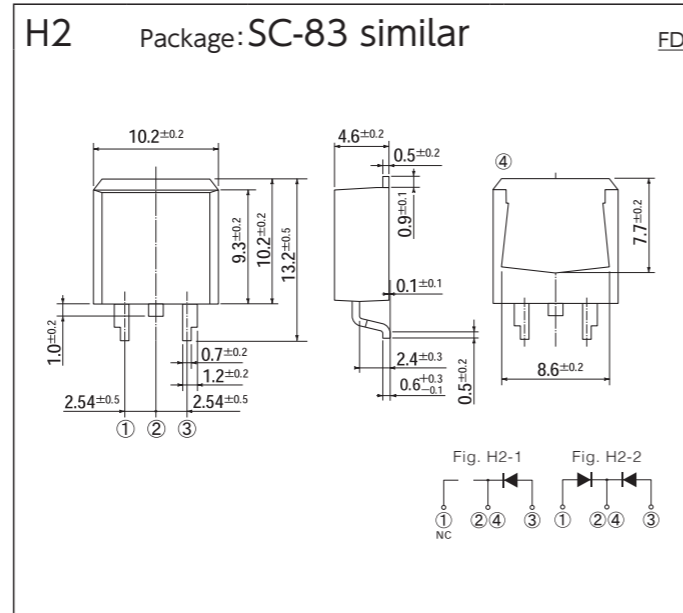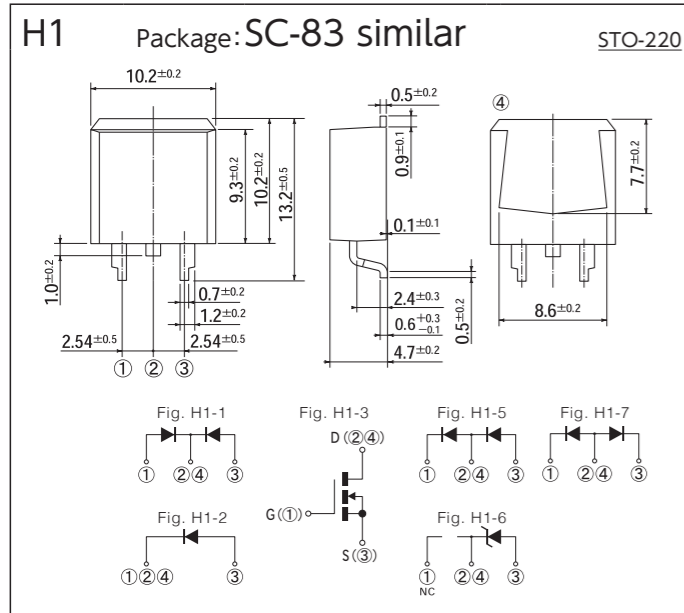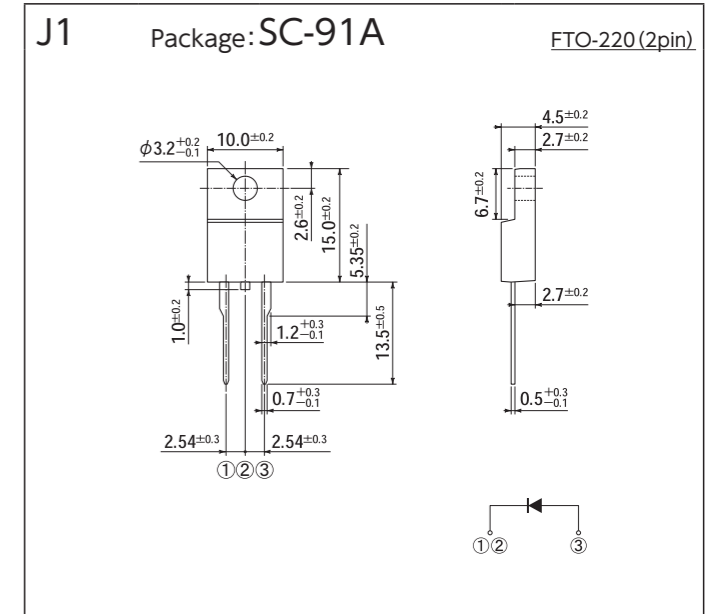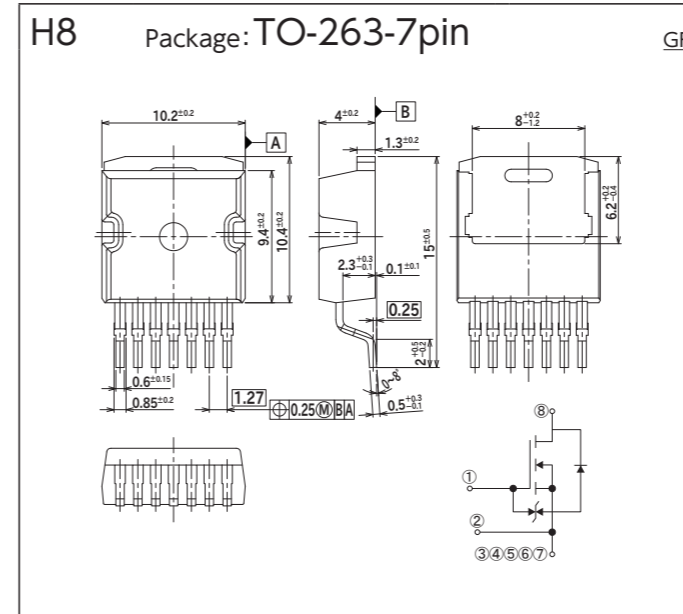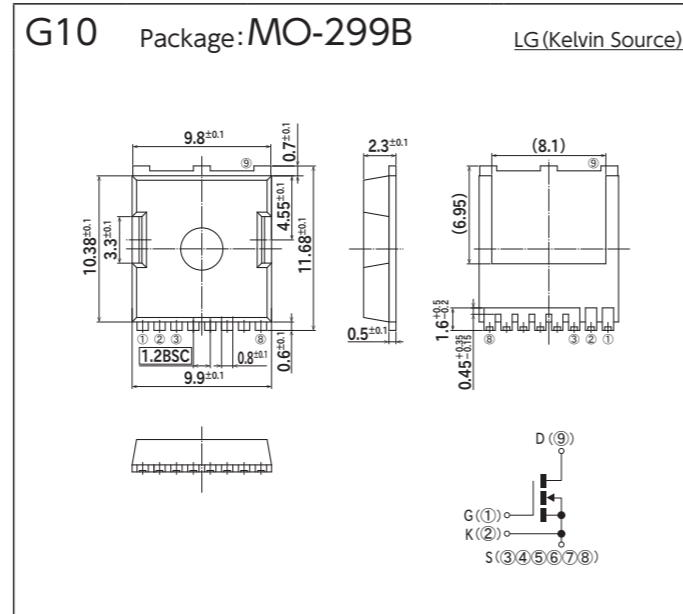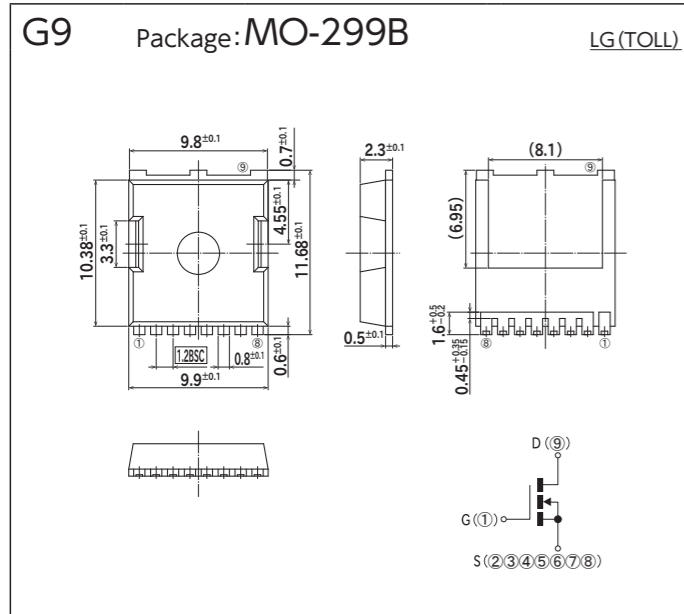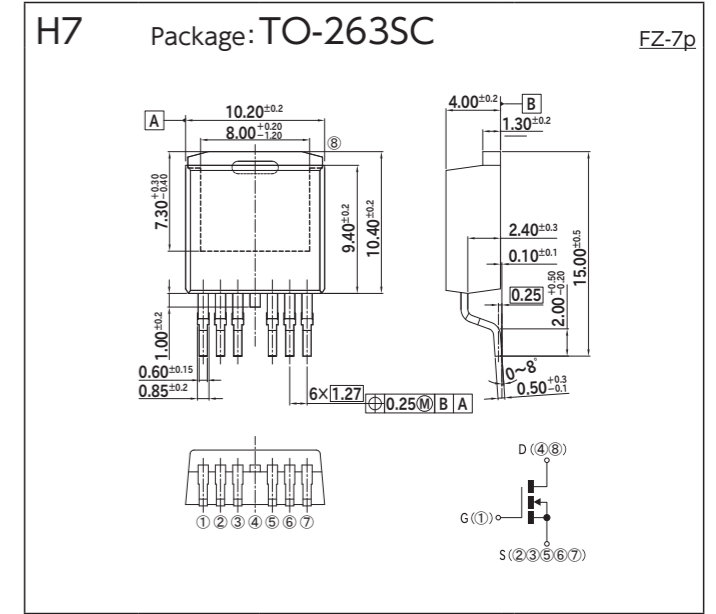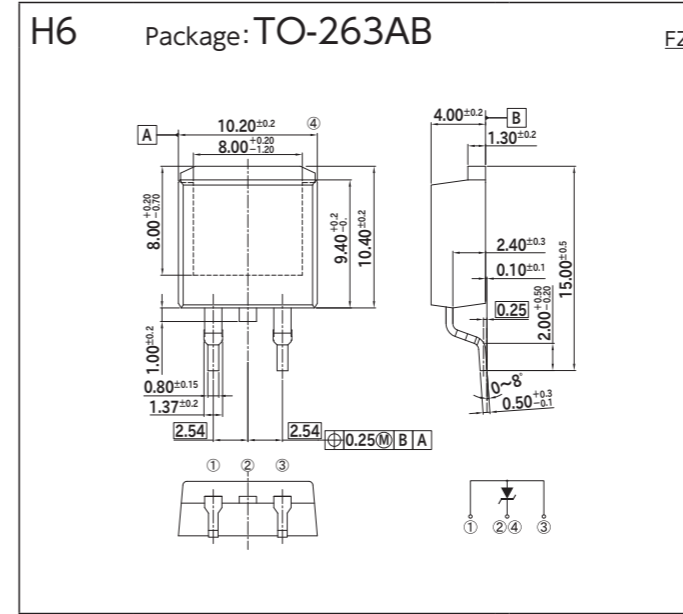

OUTLINE DIMENSIONS

# OUTLINE DIMENSIONS




[Unit:mm]

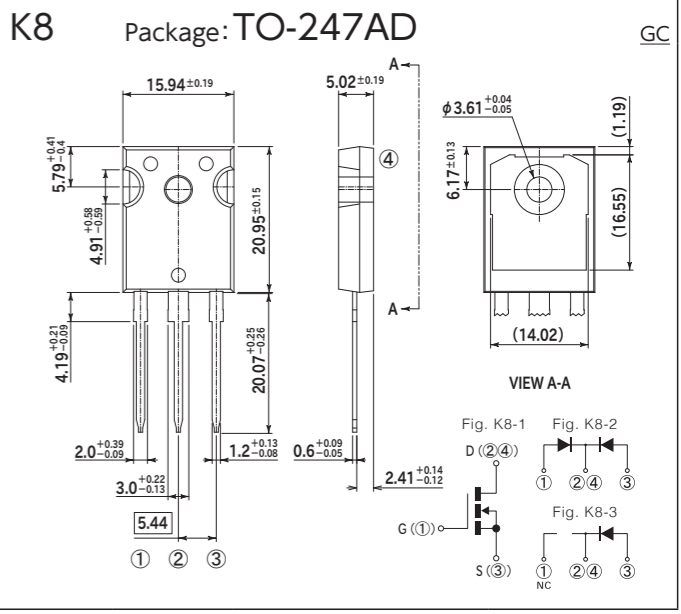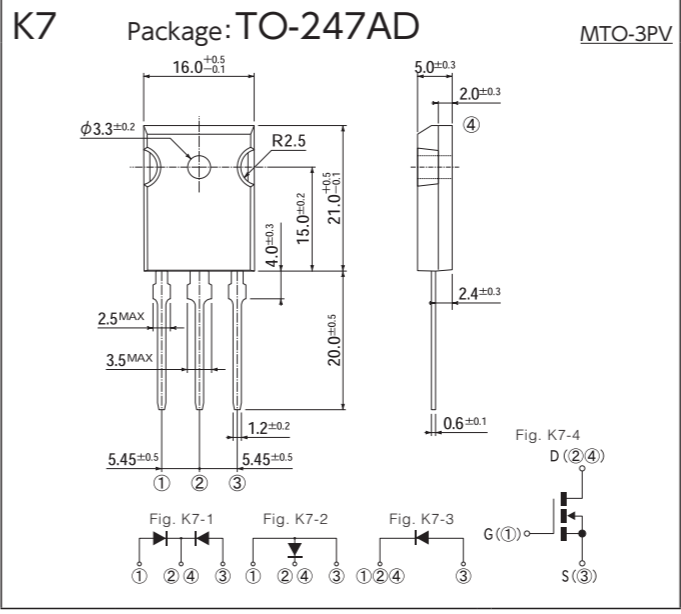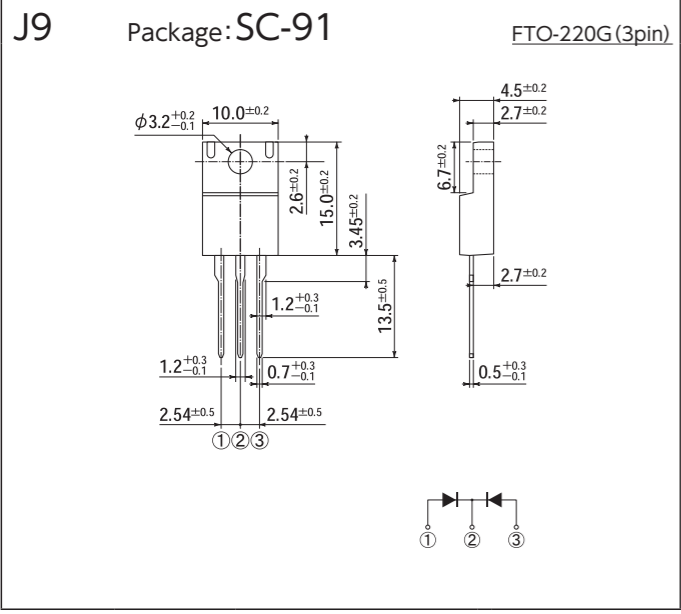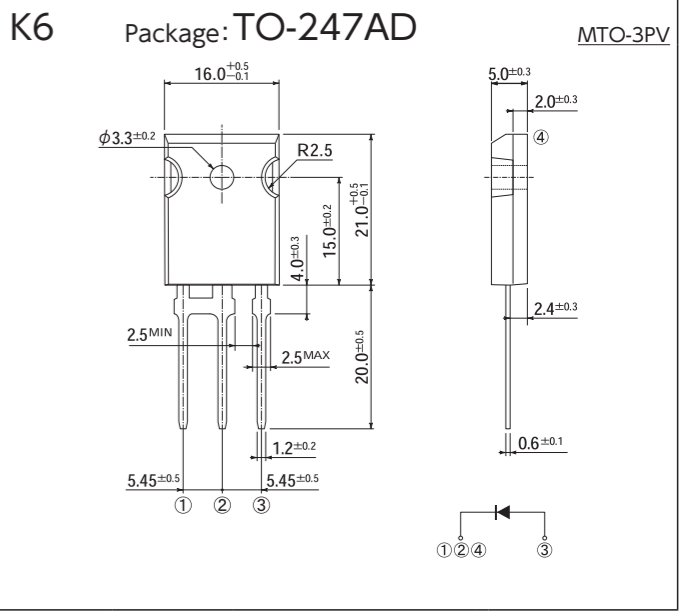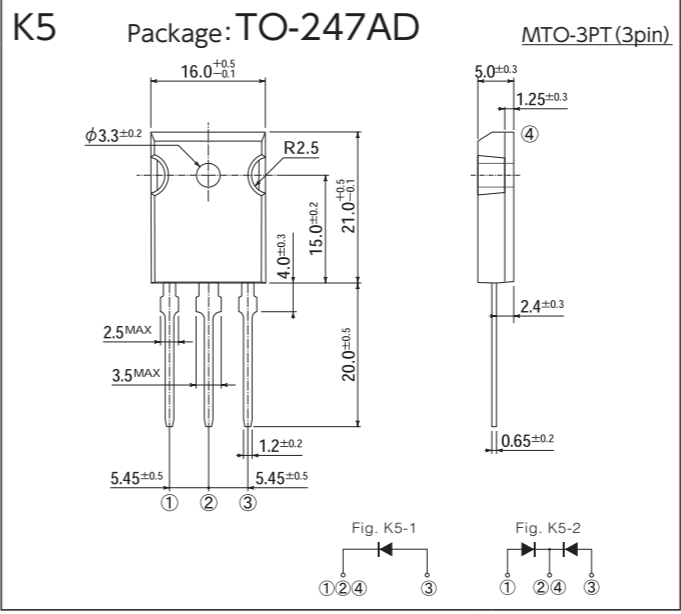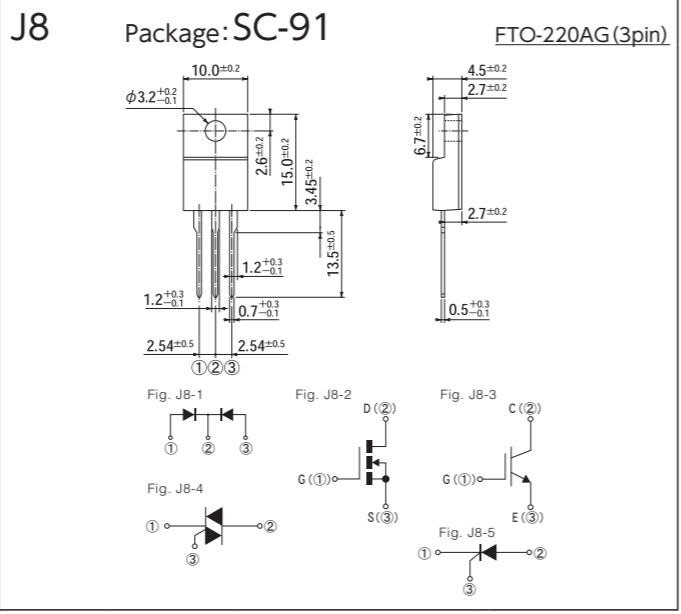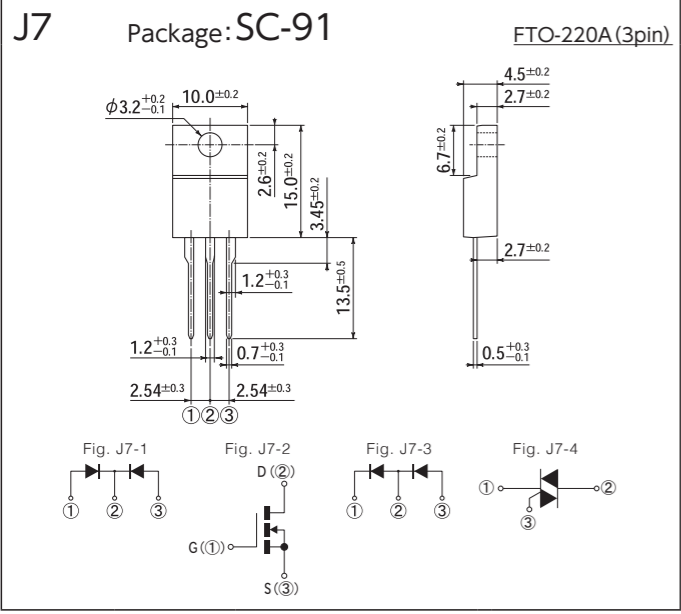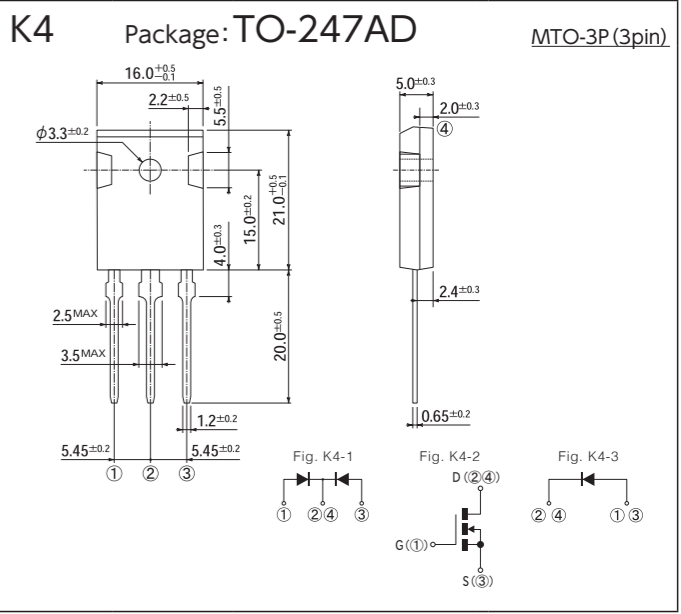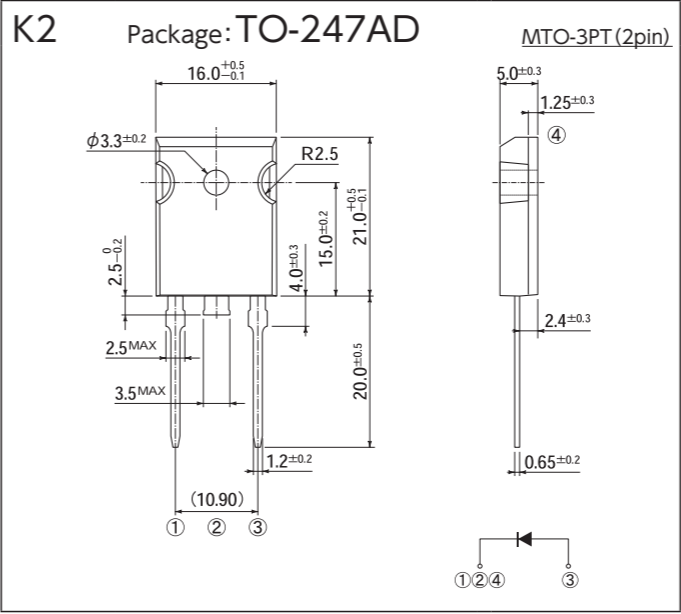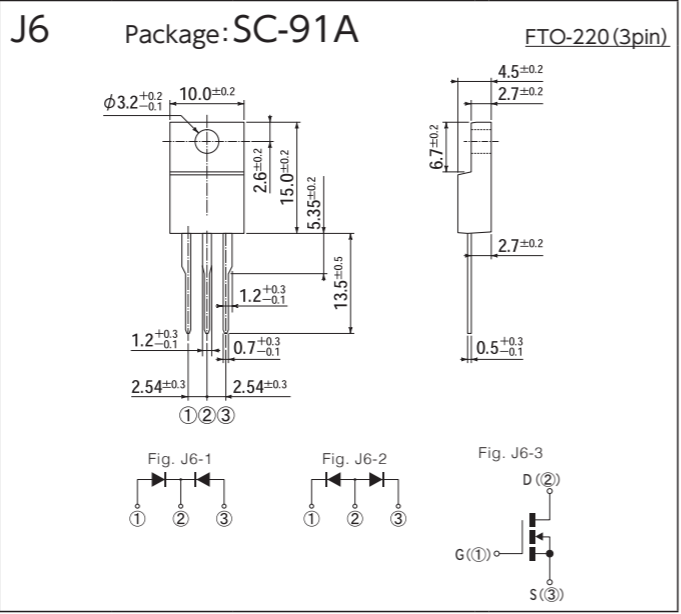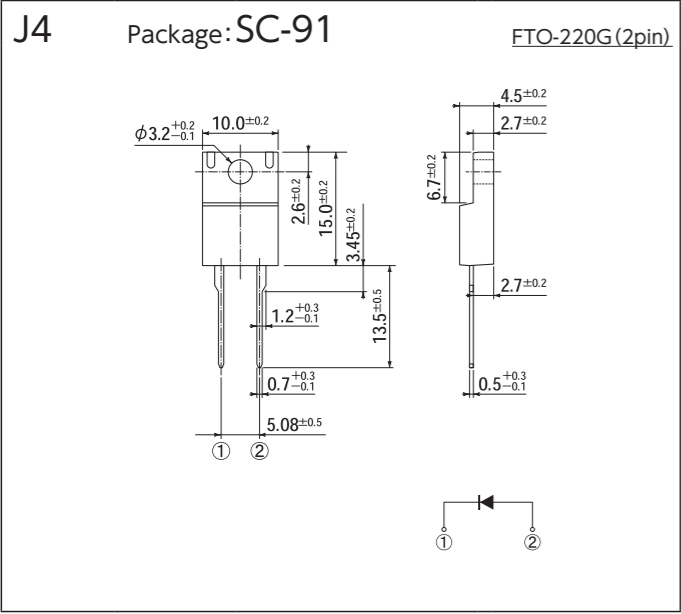








OUTLINE DIMENSIONS

# OUTLINE DIMENSIONS

[Unit:mm]

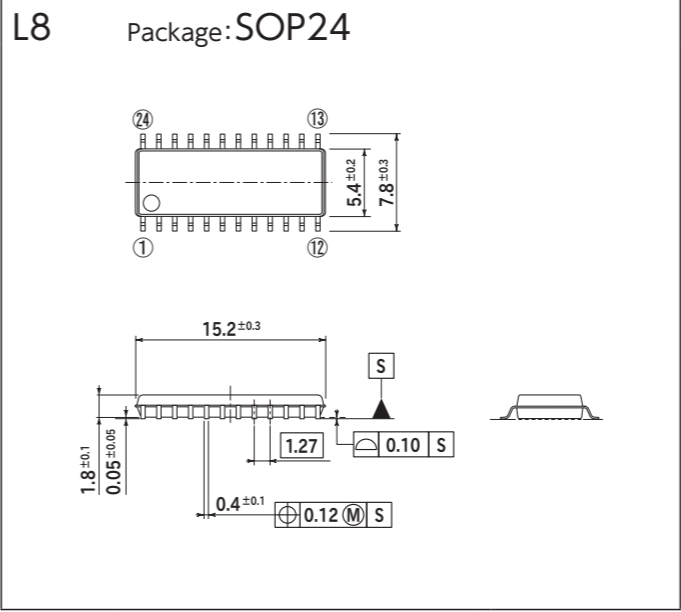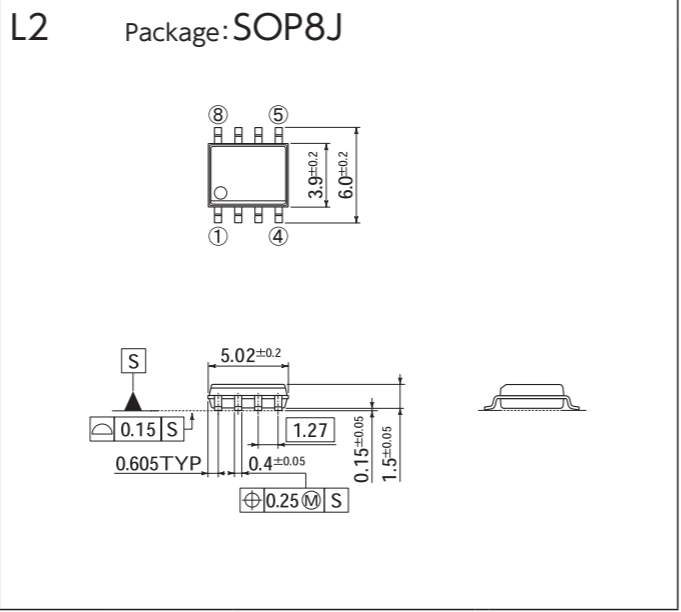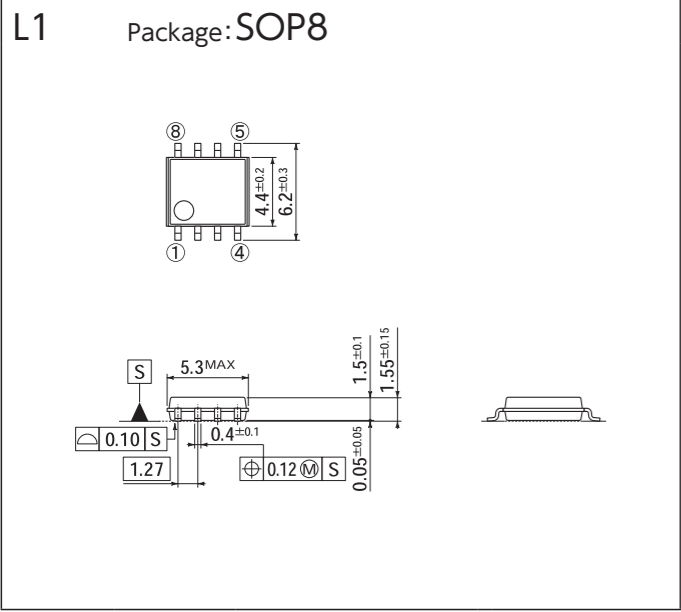

[Unit:mm]

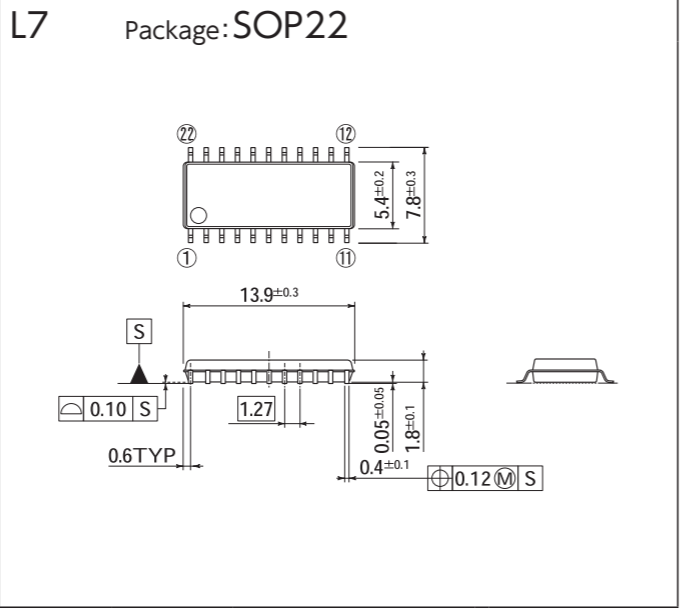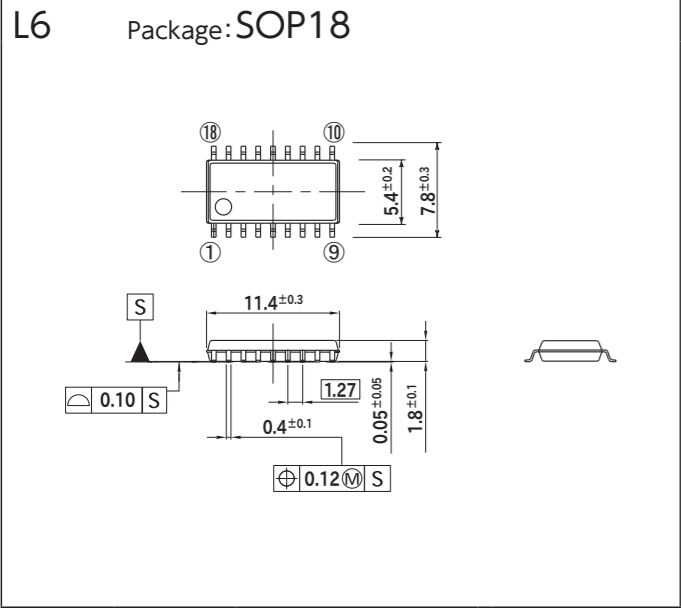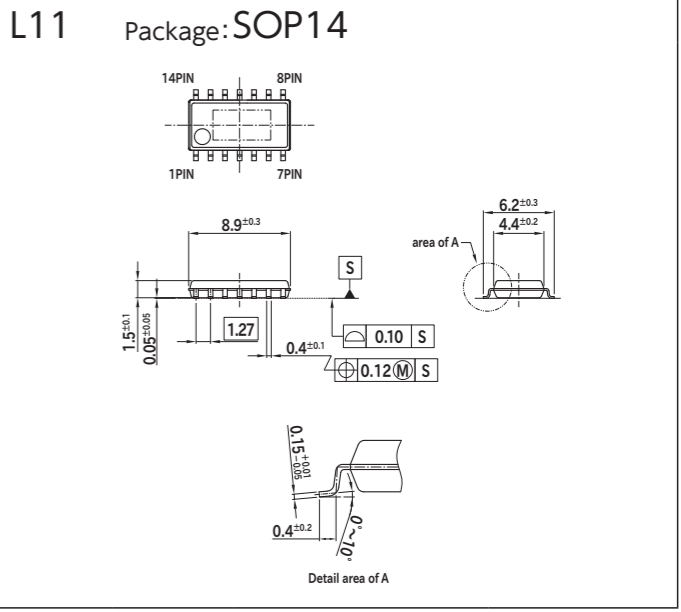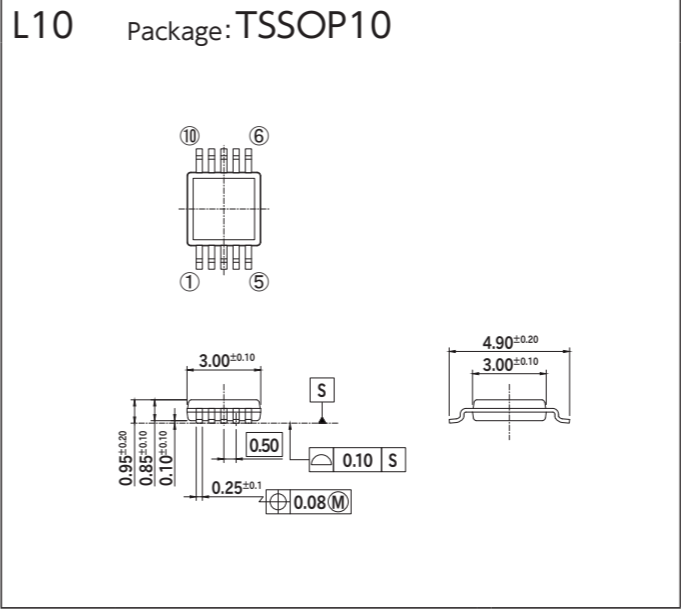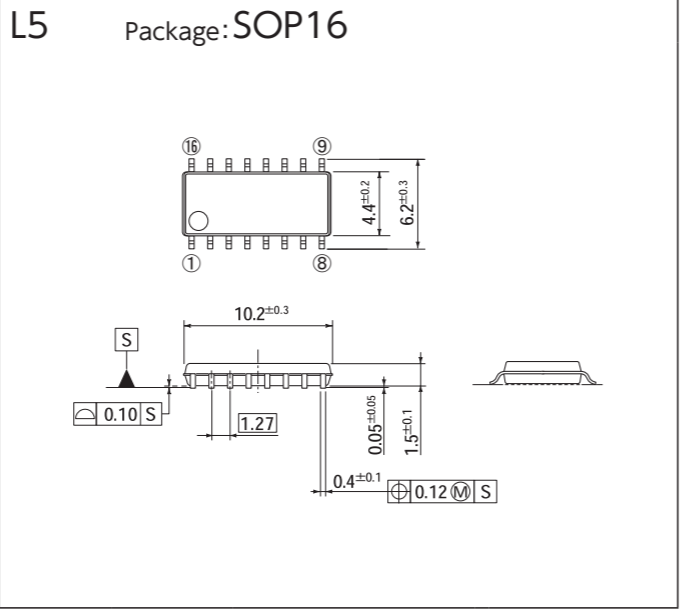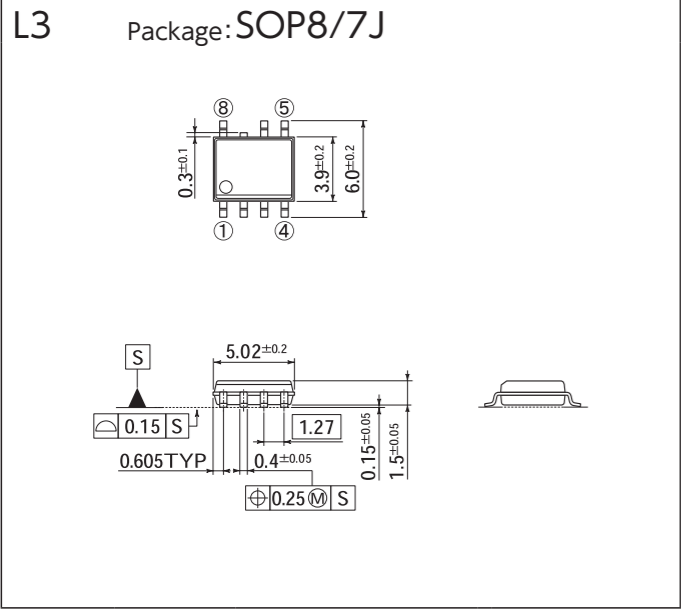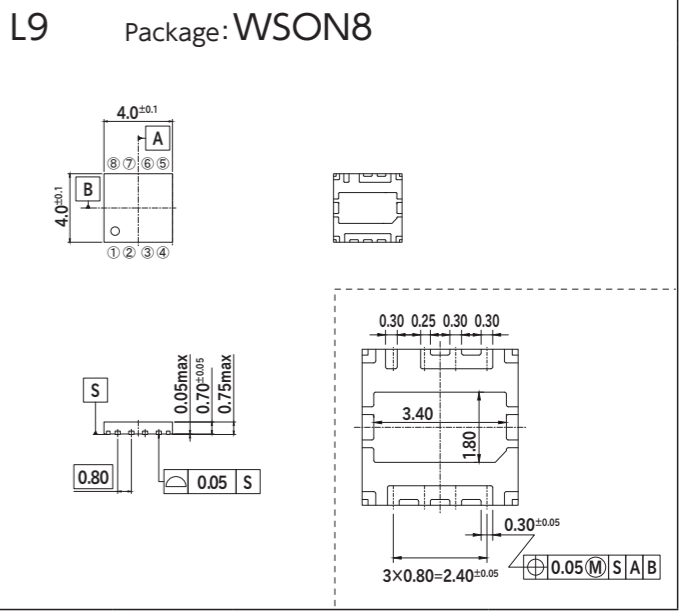

OUTLINE DIMENSIONS

# PACKING SPECIFICATION

## Order Quantity & Packing Dimensions List

Please make your order: 'more than Inner Box Quantities' and 'a multiple of each Packing Unit'

Package			Fig.	Spec Code	Terminal Plating	Weight (aprx.)	MSL	Remarks	Inner Box		Standard Packing		Packing Box (mm)		
JEDEC Package Code	JEITA Code	House Name							Method	Quantity (Pcs./Box)	Pcs./Box	Weight (kg)	L	W	H
-	-	AX057	A1	-5060 -5070	Sn	190mg	-	Standard	Tape,Ammo-Pack 52mm	4,000	32,000	7.5	330	280	270
-	-	AX06	SIDAC A2 A3	-7000 -7060 -7061 -7070	Sn-Bi	210mg	-	Standard	Tape,Ammo-Pack 26mm	3,000	36,000	6.2	340	275	230
-	-	AX078	TVS SIDAC Diodes A4	-7000 -7060 -7070 -5000 -5060 -5070	Sn-Bi Sn	390mg	-	Standard	Bulk Tape,Ammo-Pack 52mm Tape,Ammo-Pack 26mm	200 2,000 1,500	16,000 32,000 18,000	7.9 14.7 7.2	480	355	230
-	-	AX10	TVS SIDAC Diodes A5 A6	-7000 -7060 -7061 -5000 -5060 -5061	Sn-Bi Sn	640mg	-	Standard	Bulk Tape,Ammo-Pack 52mm Tape&Reel,Diameter 300 φ 52mm	200 1,200 2,500	16,000 18,000 12,500	11.1 14.4 10.8	480	355	230
-	-	AX14	A7	-5000 -5060 -5061	Sn	1.1g	-	Standard	Bulk Tape,Ammo-Pack 52mm Tape&Reel,Diameter 300 φ 52mm	200 1,200 2,500	16,000 9,600 10,000	17.5 11.2 13.0	480	355	350
DO-219AB similar	SC-109	G1F	SMD	B1	-5063R	Sn	12mg	1	Tape&Reel,Diameter 180 φ	24,000	48,000	1.6	180	205	210
DO-219AA similar	-	M1F	SMD	B2	-6063	Sn	25mg	1	Tape&Reel,Diameter 180 φ	15,000	75,000	4.5	405	210	220
DO-214AC	-	1F CF	SMD	B3 B4	-5103 -5053 -5073	Sn	60mg	1	Magazine Standard Tape&Reel,Diameter 180 φ Tape&Reel,Diameter 330 φ	100 8,000 45,000	15,000 40,000 90,000	2.3 4.1 10.8	545	145	110
-	SC-110B	CE	SMD	B5	-5063R	Sn	30mg	-	Tape&Reel,Diameter 180 φ	12,000	24,000	1.6	180	205	210
DO-214AA similar	-	M2F	SMD	B6 B7 B8	-5063 -5073	Sn	75mg	1	Standard Tape&Reel,Diameter 180 φ Tape&Reel,Diameter 330 φ	4,000 4,000	20,000 48,000	3.4 8.6	340	195	205
-	-	2F	SMD	B9 B10 B11	-5103 -5063 -5073	Sn	180mg	1	Magazine Standard Tape&Reel,Diameter 180 φ Tape&Reel,Diameter 330 φ	60 3,000 3,000	18,000 15,000 36,000	5.2 4.2 9.2	545	145	110
-	-	SOPA-4	SMD	C1	-7062	Sn-Bi	90mg	1	Tape&Reel,Diameter 180 φ	1,000	20,000	3.6	340	195	205
-	-	1N	SMD	C4	-7102 -7062	Sn-Bi	290mg	1	Magazine Tape&Reel,Diameter 250 φ	70 1,000	5,600 10,000	4.1 5.5	545	145	100
-	-	1NA	SMD	C6	-7102 -7062	Sn-Bi	290mg	1	Magazine Standard Tape&Reel,Diameter 250 φ	70 1,000	5,600 10,000	4.1 5.5	545	145	100
-	-	D3K	THD	D1	-7000	Sn-Bi	1.5g	-	Bulk	500	2,500	4.0	210	188	200
-	-	2S	THD	D2	-7000	Sn-Bi	2.1g	-	Bulk	500	6,000	14.4	410	380	170
-	-	3S	THD	D3	-7000	Sn-Bi	3.9-4.5g	-	Bulk	250	2,000	9.5	310	285	196
-	-	5S	THD	D4	-7000	Sn-Bi	6.3-7.5g	-	Bulk	250	2,000	14.5	330	330	215
-	-	JB	THD	D5	-7000	Sn-Bi	2.7g	-	Bulk	250	2,000	7.4	287	301	169
-	-	JA	THD	D6	-7000	Sn-Bi	4.5g	-	Bulk	250	2,000	9.0	327	329	185
-	-	TSB	THD (4pin) THD (5pin)	D7 D8	-7000	Sn-Bi	20g	-	Bulk	100	400	9.8	351	269	164
-	-	JC	THD (4pin) THD (5pin)	D7 D8	-7500	Sn-Bi	20g	-	Tray	40	200	5.6	503	356	135
-	-	JF	THD	D9	-7500	Sn-Bi	25g	-	Tray	40	200	5.6	503	356	135
-	-	JH	THD	D10	-7501	Sn-Bi	31g	-	Tray	40	200	5.6	503	356	135
-	-	D6K	THD	D11	-7000	Sn-Bi	4g	-	Bulk	500	2,000	8.0	260	220	222
-	-	MCP	SMD	E1	-4062 -4072	Ni	1.9g	1	Standard Tape&Reel,Diameter 255 φ Tape&Reel,Diameter 330 φ	300 600	1,500 1,800	5.0 5.5	280	275	190
-	-	D30VC	THD	E2	-4000	Ag	12g	-	Tray	100	500	7.0	375	285	160
-	-	S2VB	THD	E3	-5000	Sn-Ag-Cu	3.0g	-	Tray	100	1,000	3.6	265	255	170
-	-	S4VB	THD	E4	-5000	Sn-Ag-Cu	5.2g	-	Tray	100	1,000	5.9	315	285	220
-	-	S5VB	THD	E5	-5000	Sn-Ag-Cu	9.1g	-	Tray	100	1,000	10.4	415	285	300
-	-	S10VB	THD	E6	-5000	Sn-Ag-Cu	8.0g	-	Tray	100	1,000	9.3	375	285	270

Exterior packaging is an example. Depending on the quantity ordered, the number of incoming, outline and weight may change.

Package				Fig.	Spec Code	Terminal Plating	Weight (aprx.)	MSL	Remarks	Inner Box		Standard Packing		Packing Box (mm)		
JEDEC Package Code	JEITA Code	House Name	Method							Quantity (Pcs./Box)	Pcs./Box	Weight (kg)	L	W	H	
-	-	S15VB	THD	E7	-4000	Ag	16g	-	Tray	100	500	9.0	415	285	180	
-	-	S25VB	THD	E8	-4000	Ag	21g	-	Bulk	60	300	7.0	335	205	165	
-	-	S50VB	THD	E9	-4000	Ag	28g	-	Tray	50	200	6.2	335	205	165	
-	-	S3WB	THD	E10	-5000	Sn-Ag-Cu	5.1g	-	Tray	100	1,000	6.1	315	285	220	
-	-	S10WB	THD	E11	-5000	Sn-Ag-Cu	9.0g	-	Tray	100	1,000	9.3	375	285	270	
-	-	S15WB	THD	E12	-5000	Sn-Ag-Cu	16g	-	Tray	100	1,000	15.1	415	285	300	
-	-	S20WB	THD	E13	-5000	Sn-Ag-Cu	20g	-	Tray	100	700	15.0	415	285	300	
-	-	SVTA	THD	E14	-5000	Sn-Ag-Cu	30g	-	Tray	50	250	8.7	460	295	240	
-	-	SVT	THD	E15	-4000	Ag	31g	-	Bulk	200	200	13.6	335	205	165	
-	-	Module	-	F1 F2 F3	-4000	Ni	42-66g	-	Tray	100	200	13.4	480	330	210	
-	-	MG001	THD	F4	-7101	Sn-Bi	10g	-	Magazine	15	450	7.1	623	232	144	
-	-	MG031	THD	F5	-7101	Sn-Bi	7.7g	-	Magazine	12	600	8.5	573	281	127	
-	-	MG032	-	F6	-4500	Ni	340g	-	Tray	24	24	8.0	610	315	140	
-	-	MG038	-	F7	-4500	Ni	180g	-	Tray	40	40	9.0	425	360	155	
-	-	MG048	THD	F8	-7101	Sn-Bi	■	-	Magazine	9	108	4.9	533	244	130	
-	-	MG060	-	F9	-4500	Ni	-	-	Tray	40	40	9.0	425	360	155	
-	-	MG061	-	F10	-4500	Ni	-	-	Tray	40	40	11.0	425	360	155	
-	-	MG073	-	F12	-	Ni	85g	-	Tray	-	-	-	-	-	-	
-	-	MG074	-	F13	■	■	■	■	Tray	■	■	■	■	■	■	
-	-	SC-63	E-pack	Only DE5VE40 Other	G1	-5101 -5061 -5071 -7101 -7061 -7071	Sn Sn-Bi	1	Magazine Standard Tape&Reel,Diameter 250 φ Tape&Reel,Diameter 330 φ Magazine	80 1,500 3,000 80	10,000 6,000 12,000 10,000	6.9 2.9 5.5 6.9	560	130	109	
TO-252AA	-	FB	SMD	G2	-5071	Sn	320mg	1	Standard Tape&Reel,Diameter 330 φ	6,000	36,000	18.2	380	365	390	
TO-252AB similar	SC-63	FE	SMD	G3	-5061 -5071	Sn	320mg	1	Only Di Standard (Di,MOS) Tape&Reel,Diameter 254 φ Tape&Reel,Diameter 330 φ	1,500 3,000	6,000 12,000	2.9 5.5	260	260	99	
TO-277A similar	-	FY	SMD	G4	-5063R	Sn	110mg	1	Tape&Reel,Diameter 180 φ	6,000	30,000	5.0	405	210	220	
TO-252AA similar	-	FR	SMD	G5	-5071	Sn	350mg	1	Tape&Reel,Diameter 330 φ	3,000	12,000	6.3	348	348	122	
-	-	LA	SMD	G6	-5070	Sn	100mg	1	Tape&Reel,Diameter 330 φ	3,000	12,000	3.0	350	350	135	
MO-235B similar	-	LF	SMD	G7	-5071	Sn	100mg	1	Tape&Reel,Diameter 330 φ	10,000	50,000	11.6	385	370	238	
MO-235B	-	LF_Dual	SMD	G8	-5071	Sn	100mg	1	Tape&Reel,Diameter 330 φ	10,000	50,000	11.6	385	370	238	
MO-299B	-	LG	SMD	G9 G10	-5070	Sn	0.8g	1	Tape&Reel,Diameter 330 φ	2,000	12,000	14.5	365	380	390	
-	SC-83 similar	STO-220	SMD	H1	-7102 -7072	Sn-Bi	1.4g	1	Magazine Standard Tape&Reel,Diameter 330 φ	50 1,000	4,500 3,000	9.5 6.0	555	145	110	
-	SC-83 similar	FD	SMD	H2	-5072	Sn	1.5g	1	Tape&Reel,Diameter 330 φ	1,000	3,000	6.0	336	336	119	
TO-263AB	-	FZ	SMD	H6	-5071	Sn	1.5g	-	Tape&Reel,Diameter 330 φ	1,000	3,000	7.0	375	360	165	
TO-263SC	-	FZ-7p	SMD	H7	-5071	Sn	1.5g	-	Tape&Reel,Diameter 330 φ	1,000	3,000	7.0	375	360	165	
-	SC-91A	FTO-220	THD	J1 J6	-7600	Sn-Bi	1.9g	-	Bulk	2,000	4,000	8.3	365	220	335	
-	SC-91	FTO-220A	THD	J2 J7	-7600	Sn-Bi	1.9g	-	Bulk	2,000	4,000	8.3	365	220	335	
-	SC-91	FTO-220G	THD	J4 J9	-5600	Sn	1.6g	-	Bulk	2,000	4,000	8.3	365	220	335	
TO-247AD	-	MTO-3PT	THD	K2 K5	-5000	Sn	5.1g	-	Bulk	500	1,000	6.8	351	176	123	
TO-247AD	-	MTO-3P	MOSFET Diodes	K4	-7100 -7000	Sn-Bi	6.1g	-	Magazine Bulk	30 500	900 1,000	7.6 6.8	530	145	110	
TO-247AD	-	MTO-3PV	THD	K6 K7	-5000 -5100	Sn	6.2g	-	Standard Bulk Magazine	500 500 30	1,000 1,000 900	6.8 6.8 7.6	351	176	123	
TO-247AD	-	GC	THD	K8	-5100	Sn	6.3g	-	Magazine	600	1,200	11.0	560	220	135	
-	-	SOP8	SMD	L1	-7062	Sn-Bi	90mg	1	Tape&Reel,Diameter 180 φ	1,000	10,000	2.5	300	265	220	
-	-	SOP8J	SMD	L2	-5072	Sn	80mg	1	Tape&Reel,Diameter 330 φ	3,000	9,000	2.6	380	380	150	
-	-	SOP8/7J	SMD	L3	-5072	Sn	80mg	1	Tape&Reel,Diameter 330 φ	3,000	9,000	2.				

# NOTES

## How to Order

### 1. Indication of Spec. Code when ordering

Please specify the Spec. Code when ordering semiconductors.  
For the Spec. Code, Please refer to as follows and "PACKING SPECIFICATION".

**Example** Ordering THD type of S1ZB60  
S1ZB60-7101

### 2. Spec Code

The code specifies each packing form, lead forming and terminal plate material.

Please refer to "PACKING SPECIFICATION".

**Example** 5 0 0 0

- Terminal forming
  - 0 : Straight terminal
  - 1 to 9 : Each number shows type of form
- Packing form
  - 0 : Standard
  - In case of surface mounting devices
    - 5, 6 : Small reel
    - 7 : Large reel
  - In case of axial device
    - 6 : Lead length 52mm (T52)
    - 7 : Lead length 26mm (T26)
- Minimum packing unit
  - 0 : Bulk, tray or taping
  - 1 : Magazine
  - 5 : Tray
  - 6 : Packed (FTO-220 Package)
- Terminal plate material
  - 3 : Ni/Pd/Au, Sn-Ag
  - 4 : Ni, Ag
  - 5 : Sn-Ag-Cu, Sn, Ag, Sn-Cu
  - 6 : Sn
  - 7 : Sn-Bi

## Outline of Packing Form

### 1. Minimum packing unit

- Bulk : The form in which parts are inserted into plastic bags or cardboard boxes.
- Tray : The form in which parts are inserted in to containers made of resin.




- Magazine : The form in which parts are inserted into resin cartridges designated for automatic inserters.



- Taping
  - Reel (Surface mounting devices)




- Box (Axial devices)



### 2. Packing Box Dimensions

See the following pages for the dimensions of each cardboard box.



## About AEC-Q101 & Automotive Grade

### 1. AEC-Q101

These products are based on AEC-Q101.

### 2. Automotive Grade

These products are produced on a designated production line qualified for internal automotive standards.

# Sales Offices

## U.S.A.

### Shindengen America, Inc.

1540E, Dundee Road Suite 350 Palatine IL.60074, U.S.A.  
Phone:+1-847-444-1363 FAX:+1-847-444-0654

## Europe

### Shindengen Europe GmbH

Prinzenallee 1, 40549 Dusseldorf, Germany  
Phone:+49-211-5206590 FAX:+49-211-4986499

## Asia

### Shindengen Singapore Pte Ltd.

#### Head Office

4 Shenton Way #09-05/06 SGX Centre Singapore 068807  
Phone:+65-6445-0082 FAX:+65-6223-4372

#### Taiwan Branch

3F-1., No.126, Songjiang Road, Zhongshan District,  
Taipei City 10457, Taiwan, R.O.C.  
Phone:+886-2-2100-1218 FAX:+886-2-2100-2018

### Shindengen (Shanghai) Electric Co., Ltd.

#### Head Office

Room1506, Sheng GaoInt'l Building, 137 Xian Xia Road,  
Chang Ning, Shanghai, China  
Phone:+86-21-6270-8000 FAX:+86-21-6270-0419

#### ShenZhen Branch(深圳分公司)

中国深圳市福田区深南大道 4001 号 1452 室  
Room 1452, 4001 Shennan Avenue Shenzhen Guangdong, China

### Shindengen Electric Mfg. Co., Ltd.

#### Seoul Office

B701-4. 230, Simin-daero, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14067 Korea  
Phone:+82-31-385-1431 FAX:+82-31-385-1430

### Shindengen India Pvt. Ltd.

#### Head Office

Plot No. 283/2, Bommasandra-Jigani Link Road,  
Jigani Industrial Area, Jigani Hobli, Anekal Taluk, Bengaluru,  
Karnataka-560105, India  
Phone:+91-80-67156900 FAX:+91-80-67156972

#### Gurugram Office

Office Unit No.103C, First Floor, Time Tower,  
MG Road, Gurugram, Haryana-122002, India  
Phone:+91-124-4389742

## HP Address

Japanese : <https://www.shindengen.co.jp/>  
English : <https://www.shindengen.com/>  
Chinese : <https://cn.shindengen.co.jp/>  
Korean : <https://kr.shindengen.co.jp/>

- All specifications are subject to change without notice.
- Please consult us for the latest specifications before you order.
- Please use this products after reading manual well.

• Printed December 2024

This catalog includes the products which might be subject to the foreign exchange and foreign trade laws.

## Japan

### Shindengen Electric MFG. Co., Ltd.

#### Head Office

New-Ohtemachi Bldg., 2-2-1, Ohtemachi, Chiyoda-ku,  
Tokyo 100-0004, Japan  
Phone:+81-3-3279-4431 FAX:+81-3-3279-6478

#### Asaka Office

3-14-1, Saiwai-cho, Asaka City,  
Saitama 351-8503, Japan  
Phone:+81-48-483-5311 FAX:+81-48-483-4117

#### Osaka Branch Office

Minami Senba Heart Bldg., 2-3-2, Minami-Senba,  
Chuo-ku, Osaka City, Osaka 542-0081, Japan  
Phone:+81-6-6264-7770 FAX:+81-6-6260-1222

#### Nagoya Branch Office

Nagoya Daiichi Bldg., 1-19-24, Nishiki, Naka-ku,  
Nagoya City, Aichi 460-0003, Japan  
Phone:+81-52-221-1361 FAX:+81-52-201-4780

#### Hamamatsu Sales Office

Hamamatsu Daiichi Seimei Nittsu Bldg., 110-5, Itaya-cho,  
Naka-ku, Hamamatsu City, Shizuoka 430-0928, Japan  
Phone:+81-53-450-3800 FAX:+81-53-450-3801


#### Utsunomiya Sales Office

Flora Bldg., 1-9-15 Higashi Syukugou Utsunomiya City,  
Tochigi 321-0953, Japan  
Phone:+81-28-637-3615 FAX:+81-28-637-3115



# Package Outline

\* = Similar Package

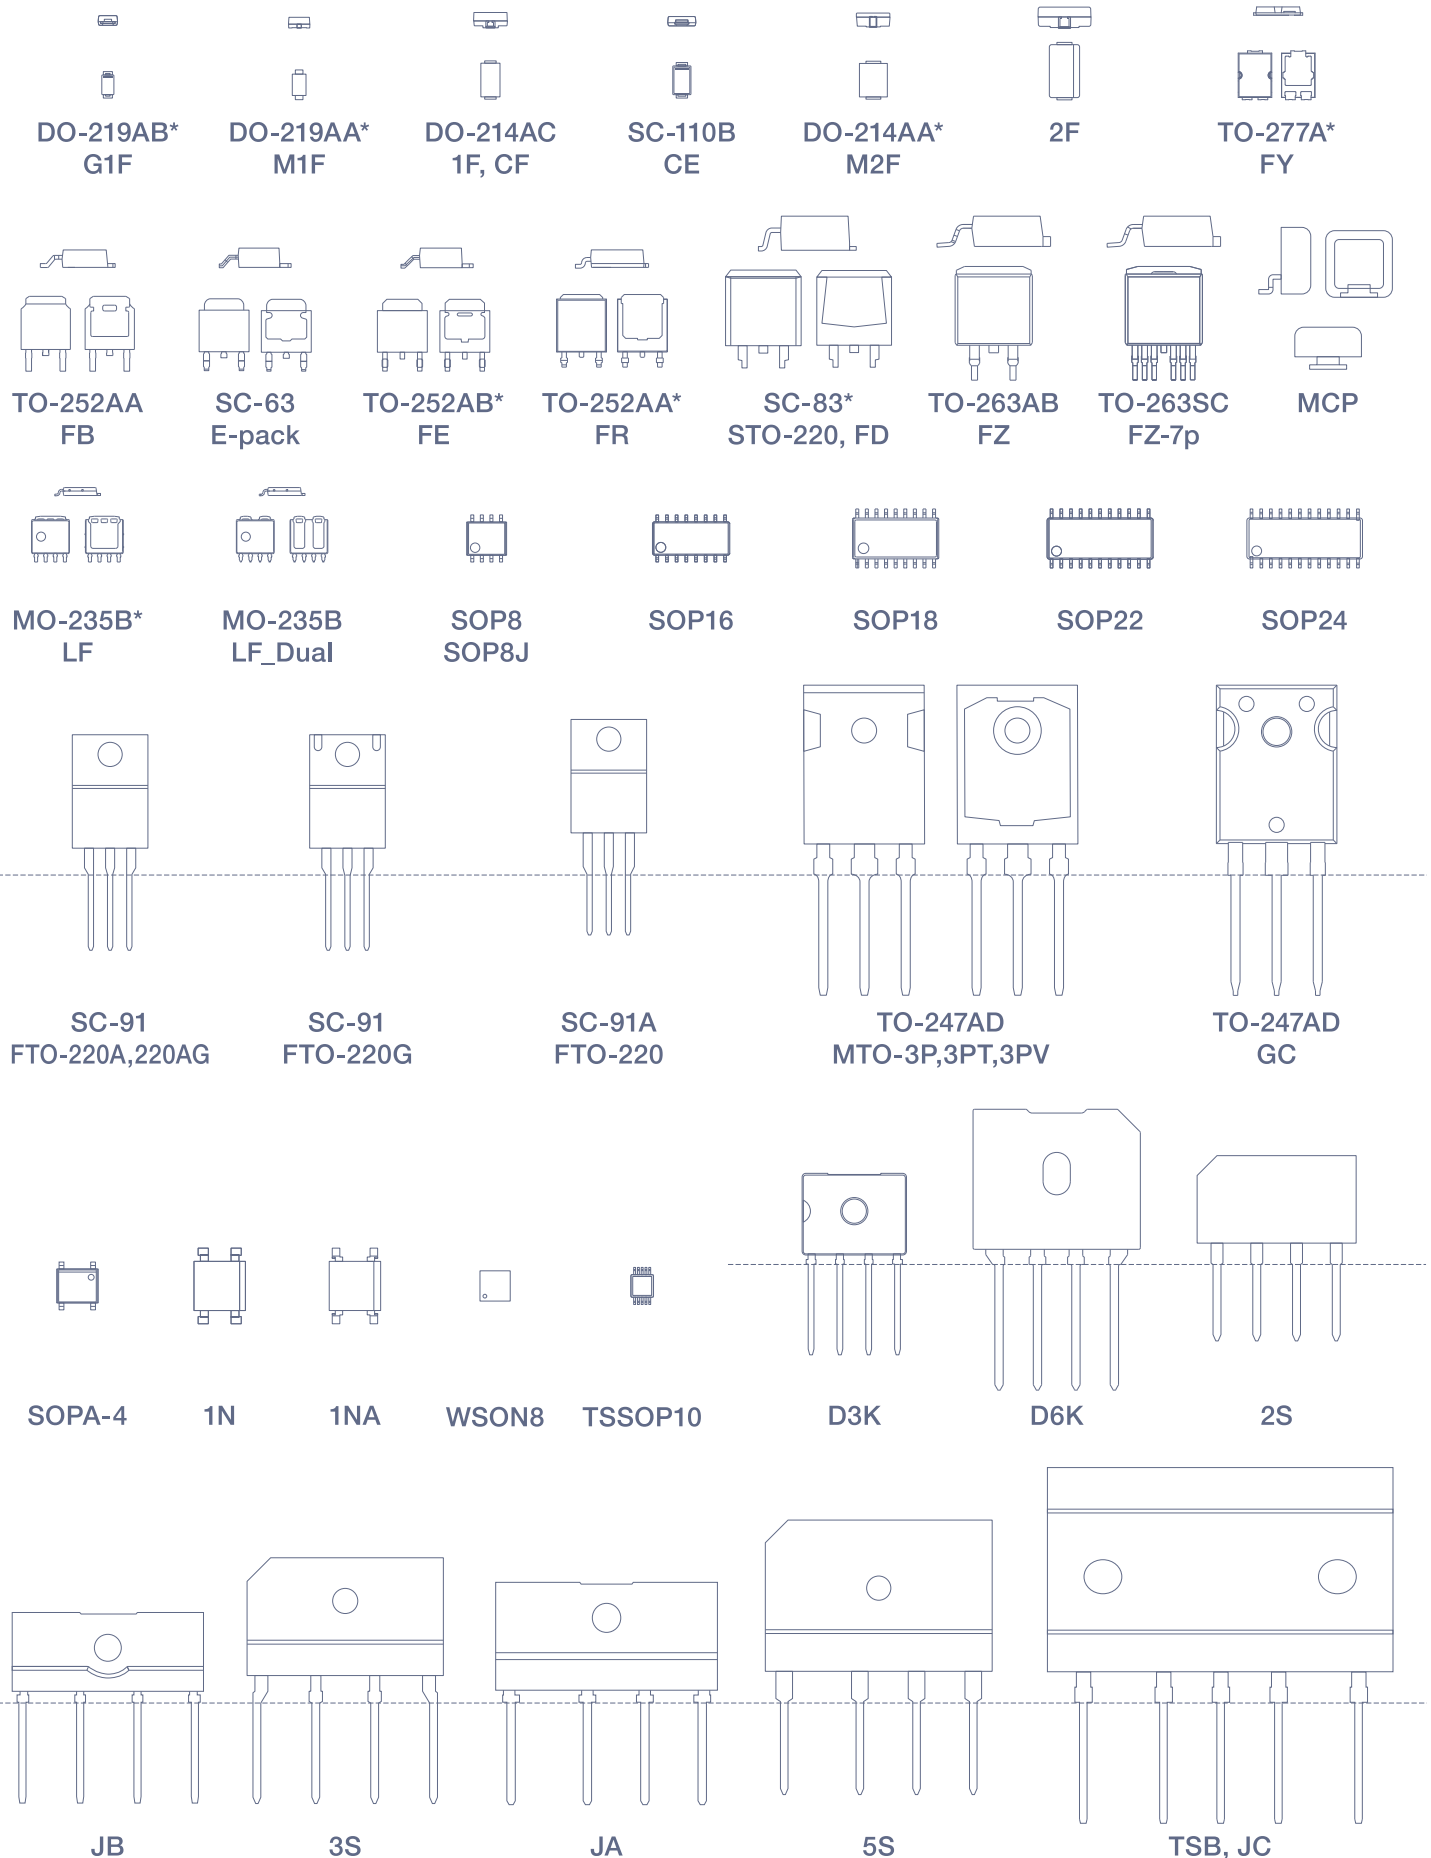

**Shindengen Electric Manufacturing Co., Ltd.**

www.shindengen.com



CAT.NO.F072-18

2412-1550(I)